

14 | Data Display and Data Input

This chapter explains how to use "Data Display & Data input" to place data display parts. Please start by reading "14.1 Settings Menu" (page 14-2) and then turn to the corresponding page.

| | | |
|-------|---|--------|
| 14.1 | Settings Menu | 14-2 |
| 14.2 | Displaying/Inputting Numeric Data | 14-5 |
| 14.3 | Displaying/Inputting Text Data..... | 14-8 |
| 14.4 | Displaying Numerical Data as an Alarm..... | 14-12 |
| 14.5 | Color-coding and Displaying Multiple Ranges | 14-16 |
| 14.6 | Displaying the Date and Time | 14-22 |
| 14.7 | Preventing Operational Errors By Using Interlock..... | 14-24 |
| 14.8 | Prevent Entering Data Outside the Allowed Range | 14-28 |
| 14.9 | 8 x16 Dots Sequential Input | 14-31 |
| 14.10 | Changing Values by Adding/Subtracting..... | 14-34 |
| 14.11 | Data Display Settings Guide | 14-39 |
| 14.12 | Restrictions | 14-107 |
| 14.13 | How Data Input Order Works | 14-110 |

14.1 Settings Menu

Displaying/Inputting Numeric Data

Displays data stored in a device/PLC

Touch and... Modify data with number pad

Beep Beep Beep

D100 = 128

0128

D100 = 500

Setup Procedure (page 14-6)
Introduction (page 14-5)

Displaying/Inputting Text Data

Characters displayed

Text data

Word Data

JAPAN

Characters displayed

JAPAN

Touch and... Edit the text



Beep Beep Beep

Word Data

Word Data



Setup Procedure (page 14-9)
Introduction (page 14-8)

Displaying Numerical Data as an Alarm

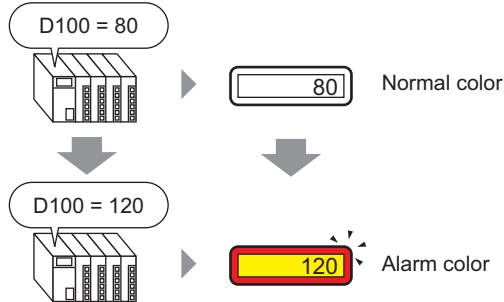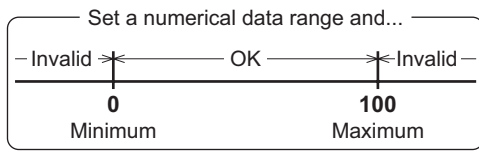

- ☞ Setup Procedure (page 14-12)
- ☞ Introduction (page 14-12)

Color-coding and Displaying Multiple Ranges

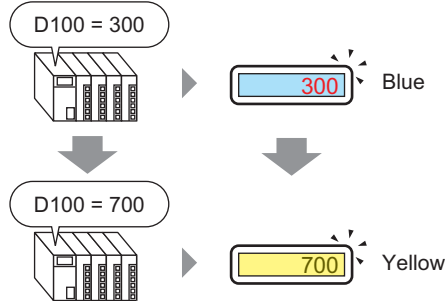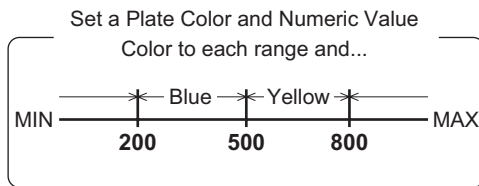


- ☞ Setup Procedure (page 14-17)
- ☞ Introduction (page 14-16)

Displaying the Date and Time

2005/01/20 (Thu) 09:32

- ☞ Setup Procedure (page 14-22)
- ☞ Introduction (page 14-22)

Preventing Operational Errors By Using Interlock

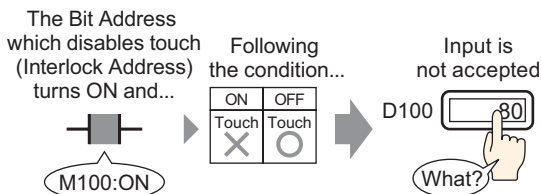

- ☞ Setup Procedure (page 14-25)
- ☞ Introduction (page 14-24)

Prevent Entering Data Outside the Allowed Range

A value set to 80

Data outside the range cannot be input

Input cancelled and old value returns

D100 [80]

Beep

Beep Beep Beep

Input Range: 0 to 100

Setup Procedure (page 14-28)
Introduction (page 14-28)

8 x16 Dots Sequential Input

D100 [69]

D101 [0]

D102 [0]

Input data and touch the [Ent] key

The input is confirmed and the next Data Display part in the input order enters the Input Permit state. → Input data and touch the [Ent] key

Setup Procedure (page 14-31)
Introduction (page 14-31)

Changing Values by Adding/Subtracting

D100 [499]

[500]


[501]

Beep Beep Beep

Setup Procedure (page 14-34)
Introduction (page 14-34)

14.2 Displaying/Inputting Numeric Data

14.2.1 Introduction

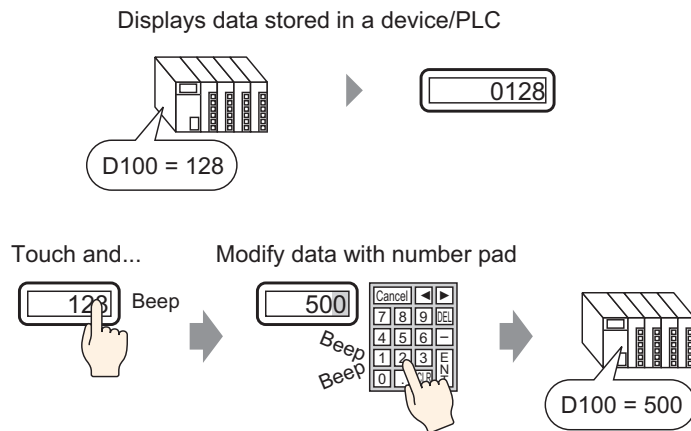



Display data stored in a designated Word Address in the device /PLC as a numeric value. Furthermore, by specifying Input Permission settings, you can display a number pad on the screen and input data to a designated Word Address.


14.2.2 Setup Procedure

NOTE

- Please refer to the Settings Guide for details.
 ☞ “14.11.1 Numeric Display” (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 ☞ “8.6.1 Editing Parts” (page 8-52)

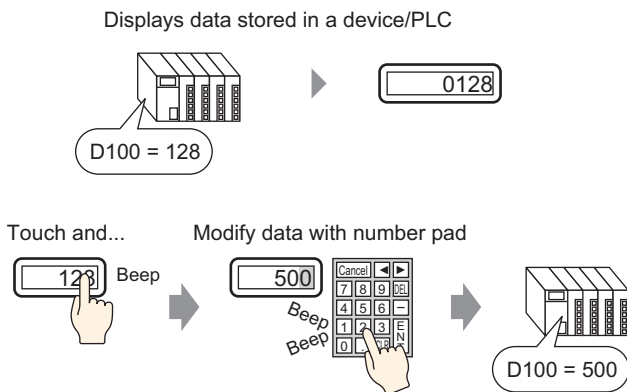

- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.
- 2 Double-click the placed Data Display. The following dialog box appears.

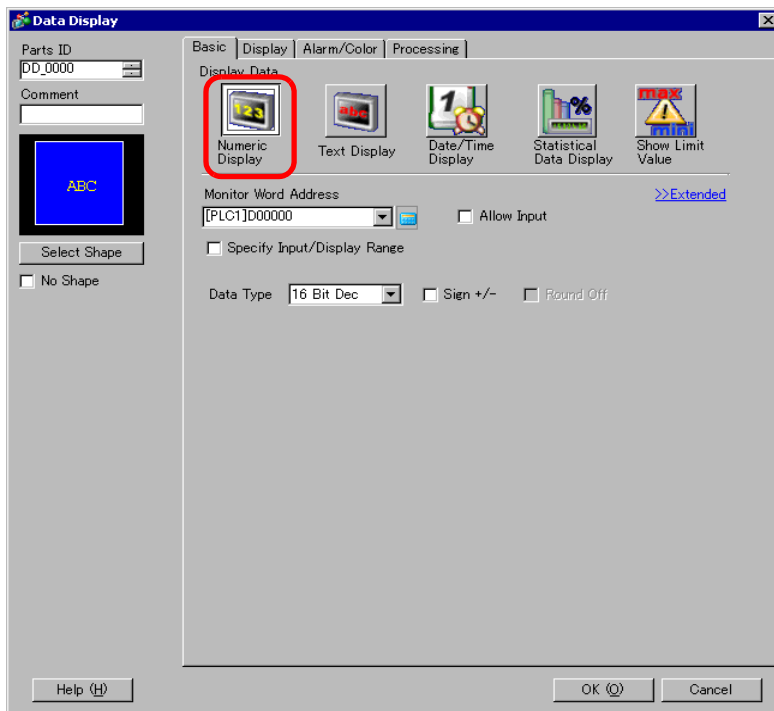


3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

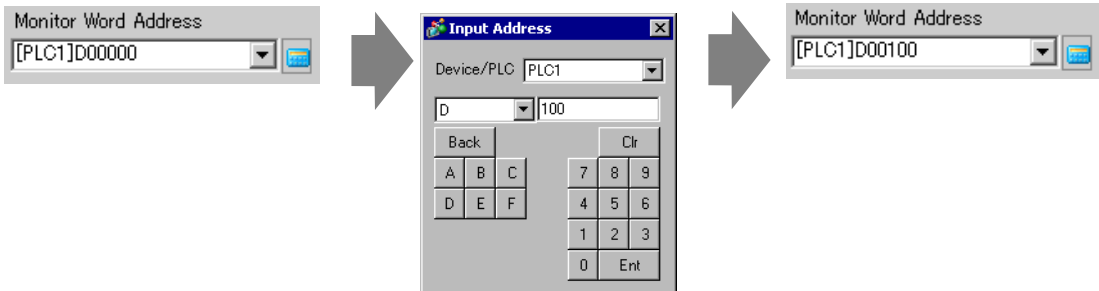

5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

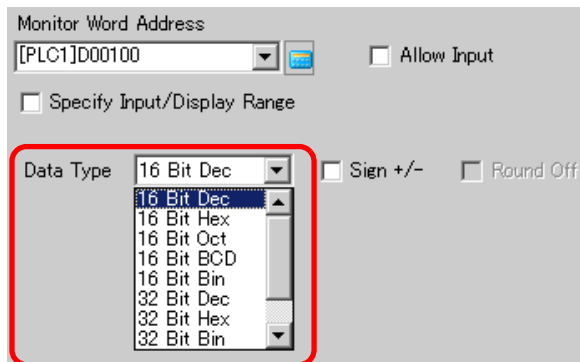

6 Select the [Allow Input] check box to display the [Data Entry] tab. Ensure the [Enable Popup Keypad] check box is selected. You can enter numerical data from the pop-up keypad.

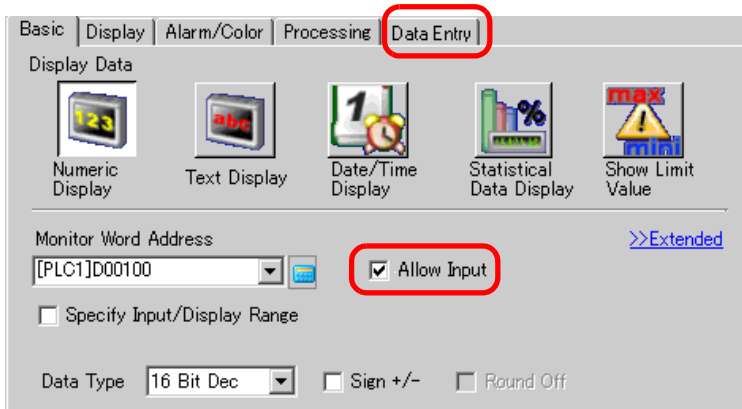


NOTE

- This cannot be set when only numeric data displays.

7 As needed, set the Data Display color and text on the [Alarm/Color] tab and [Display] tab, and click [OK].

14.3 Displaying/Inputting Text Data

14.3.1 Introduction

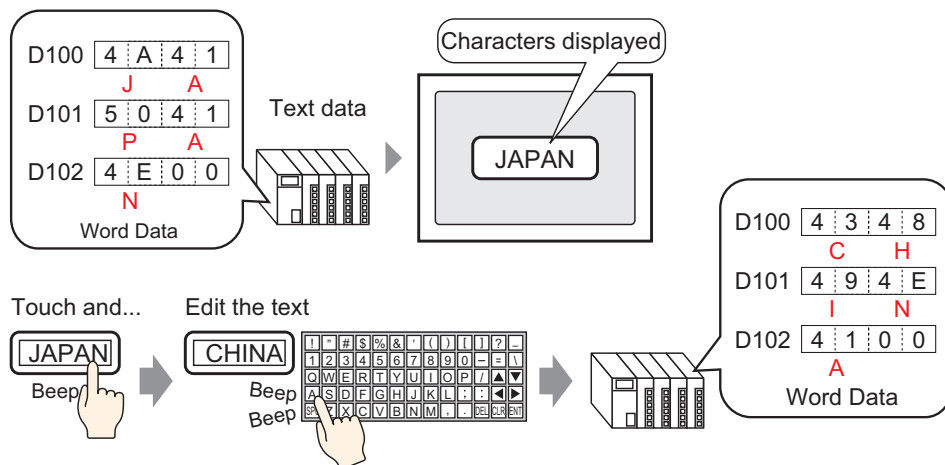

Display text data stored in a specified Word Address on the device (PLC).


There are two methods for changing Text Data: change the displayed screen, or use a trigger bit.


Furthermore, by specifying Allow Input settings, you can display a keypad on the screen and input text data to a designated Word Address.


14.3.2 Setup Procedure

NOTE

- Please refer to the Settings Guide for details.
 - ☞ “14.11.2 Text Display” (page 14-81)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 - ☞ “8.6.1 Editing Parts” (page 8-52)

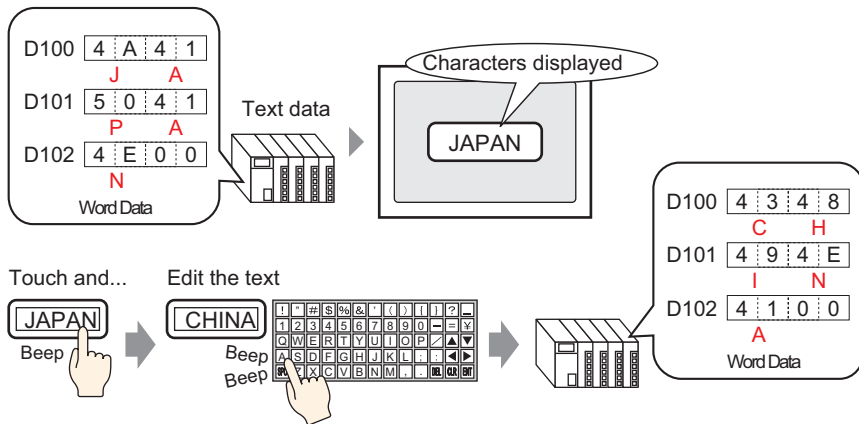


- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Text Display (S)], or click , and place it on the screen.
- 2 Double-click the placed Data Display. The following dialog box appears.

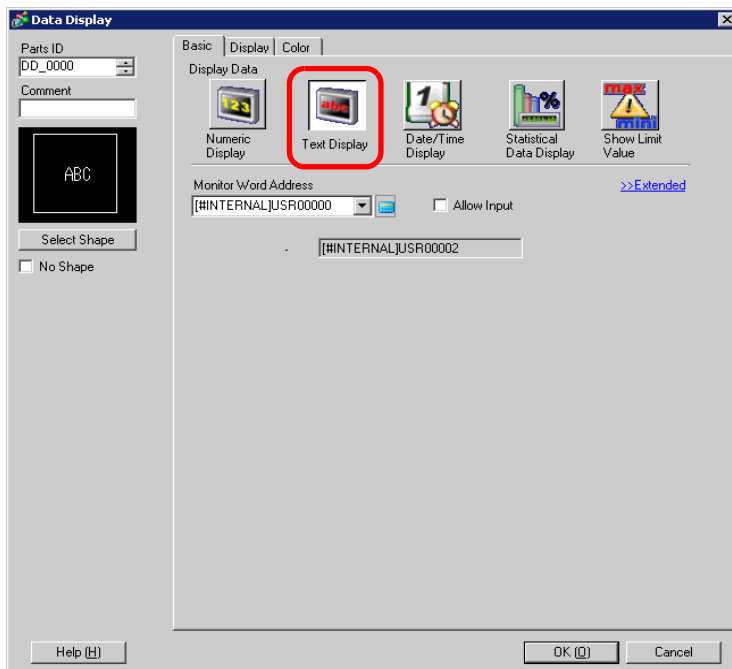

- 3 Select the Data Display shape from [Select Shape].


- Click the [Display] tab, and enter the number of characters from 1 to 100 into the [Display Characters] field. When working with double-byte characters, each double-byte character counts as two characters.

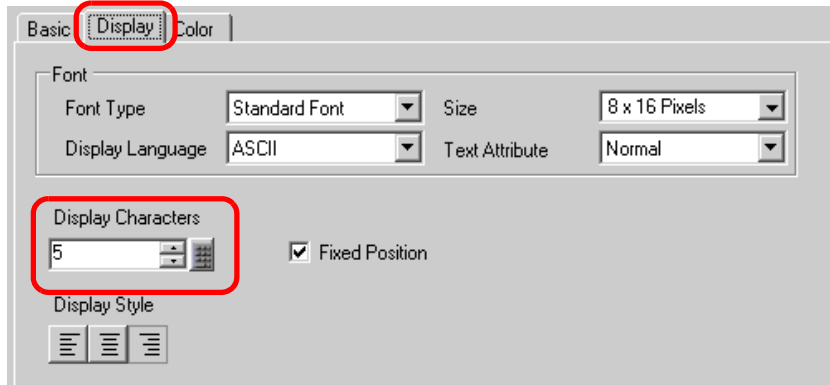


- Click the [Basic Settings] tab, and in [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.

Select device "D", input "100" as the address, and press the Enter key.

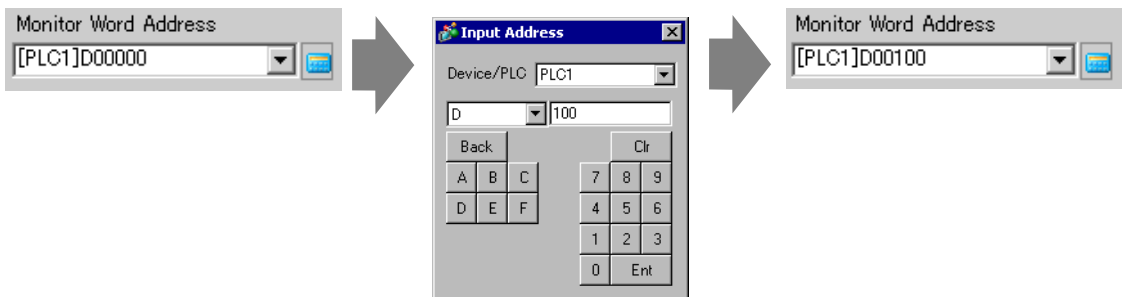


- The last address of the Word Address (Monitor Word Address + Display characters) displays.

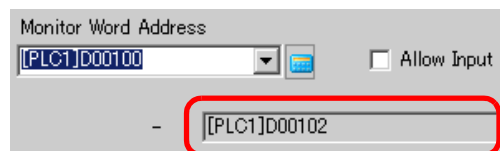

NOTE

- Use two characters for one word in English single-byte characters, and one character for one word in double-byte characters.

- 7 Select the [Allow Input] check box to display the [Data Entry] tab. Ensure the [Enable Pop-up Keypad] check box is selected. You can enter text data from the pop-up keypad.

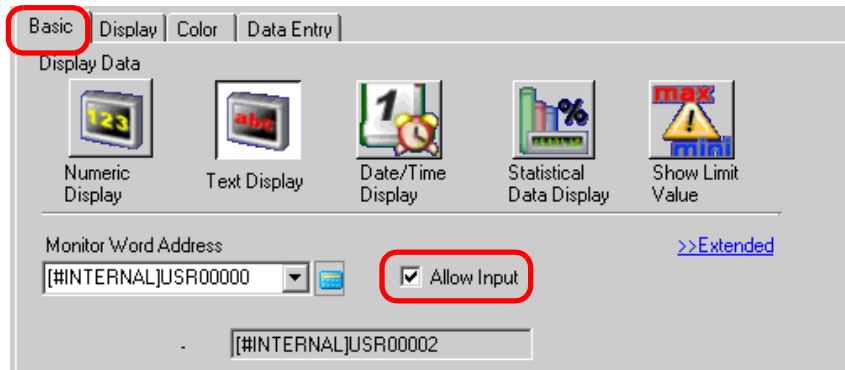**NOTE**

- This cannot be set when only text data displays.


- 8 If necessary, set the Data Display color and text on the [Color] tab and [Display] tab, and click [OK].

NOTE

- For more information about Text Displays, refer to “14.12.1 Text Display Restrictions” (page 14-107) .

14.4 Displaying Numerical Data as an Alarm

14.4.1 Introduction

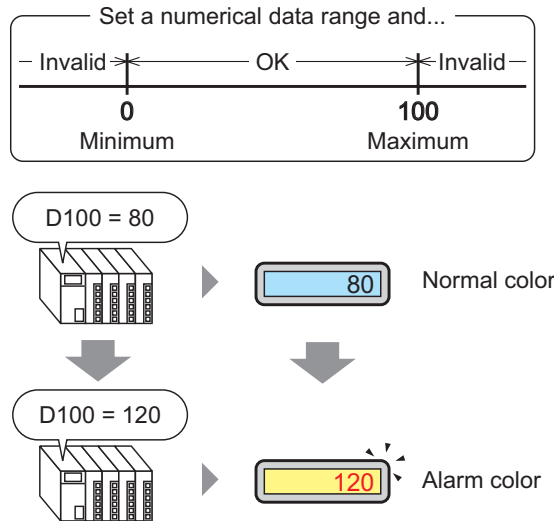


Set a range with preset numeric values.


If the numerical data is outside the range, the display color changes and the user is notified (for example, with an alarm).

14.4.2 Setup Procedure


NOTE

- Please refer to the Settings Guide for details.
 ☞ “14.11.1 Numeric Display ■ Alarm/Color/Basic” (page 14-72)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the “Part Editing Procedure”.
 ☞ “8.6.1 Editing Parts” (page 8-52)

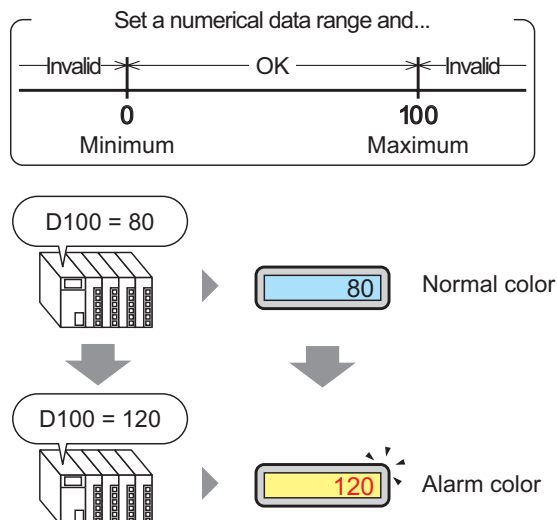

1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.

2 Double-click the placed Data Display. The following dialog box appears.

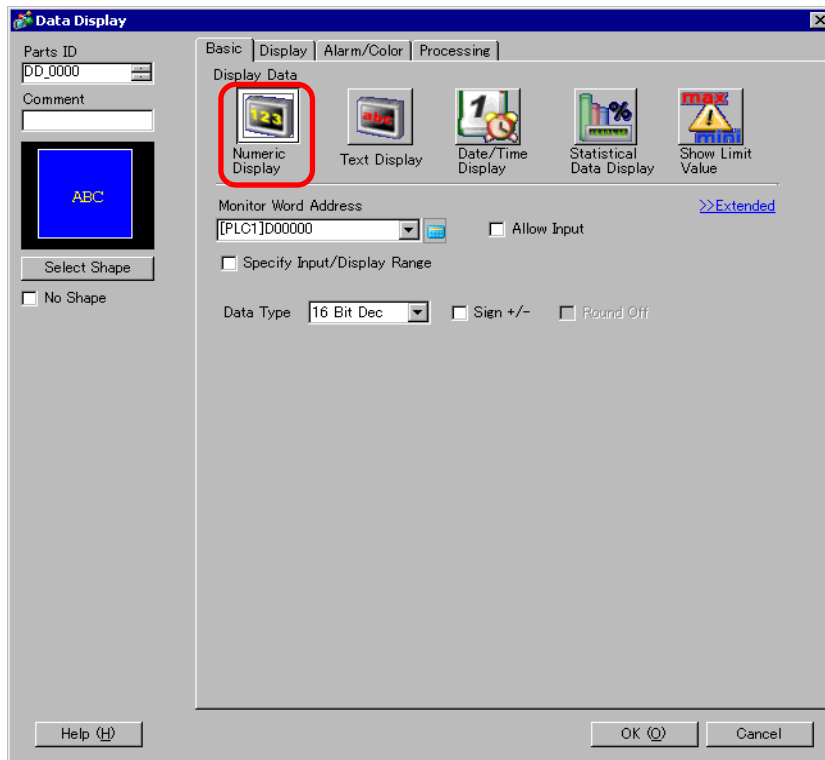


3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

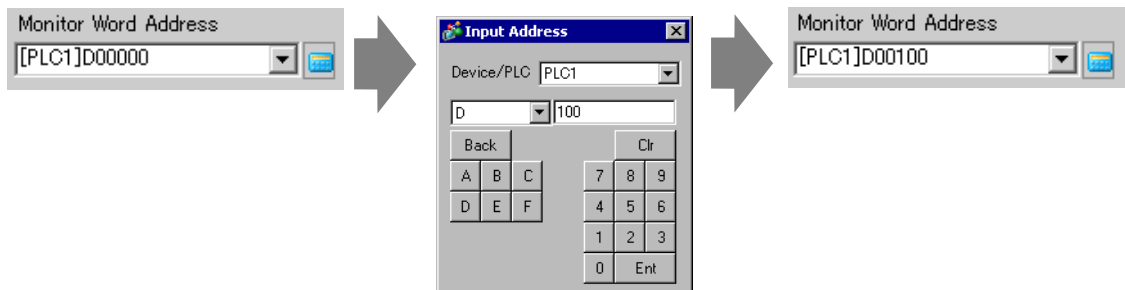

5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

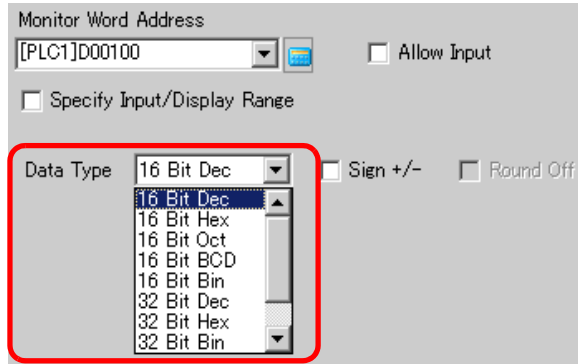


6 Click the [Alarm/Color] tab, and select the [Alarm Settings] check box.

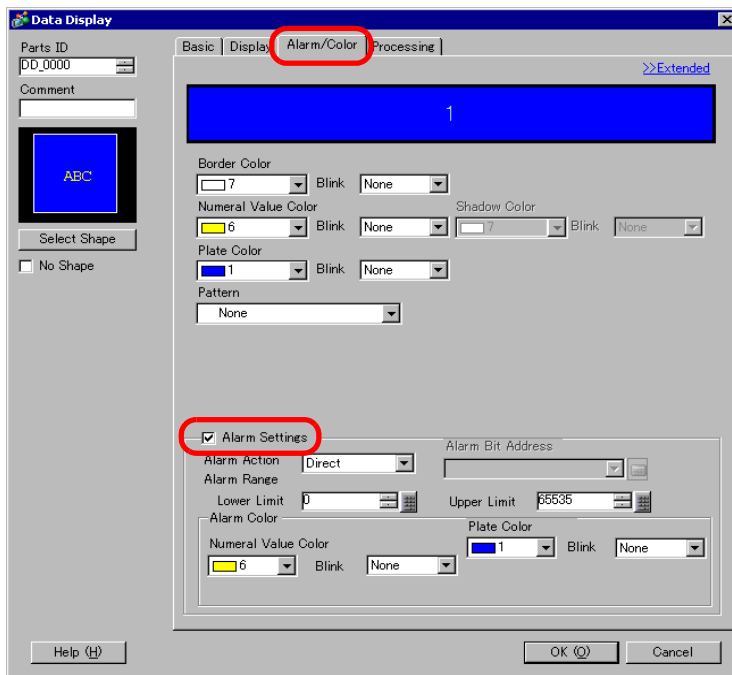

7 In [Alarm Action], select the Upper/Lower Limit Value specification method from [Direct] or [Address] (in this example, [Direct]).



8 In [Alarm Range], set the Upper Limit (for example, 100) and Lower Limit (for example, 0).

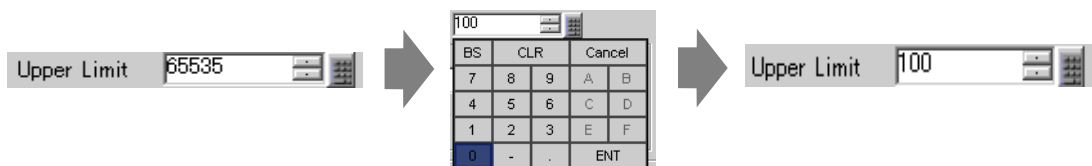


9 In [Alarm Color], set the [Numeral Value Color] (for example, Red) and the [Plate Color] (for example, Yellow).



10 If necessary, set the Data Display text on the [Display] tab, and click [OK].

14.5 Color-coding and Displaying Multiple Ranges

14.5.1 Introduction

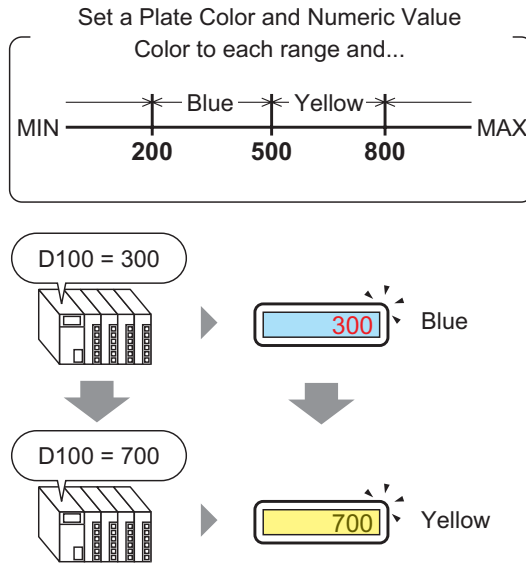



By setting colors for each range, values will change colors when they reach the set range. You can change the Plate/Text color.

14.5.2 Setup Procedure


NOTE

- Please refer to the Settings Guide for details.
 ☞ "14.11.1 Numeric Display" (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 ☞ "8.6.1 Editing Parts" (page 8-52)

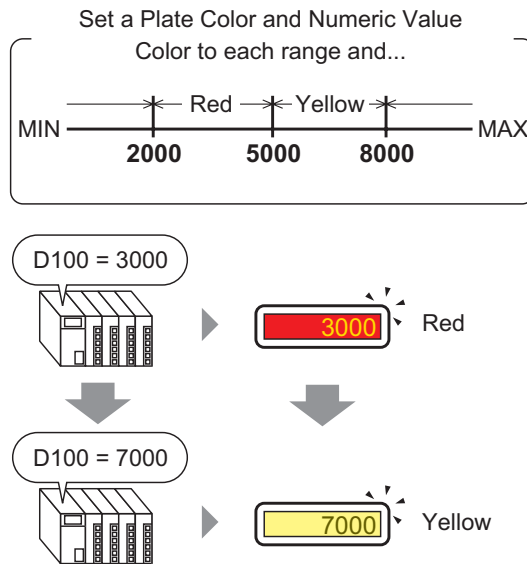

1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.

2 Double-click the placed Data Display. The following dialog box appears.

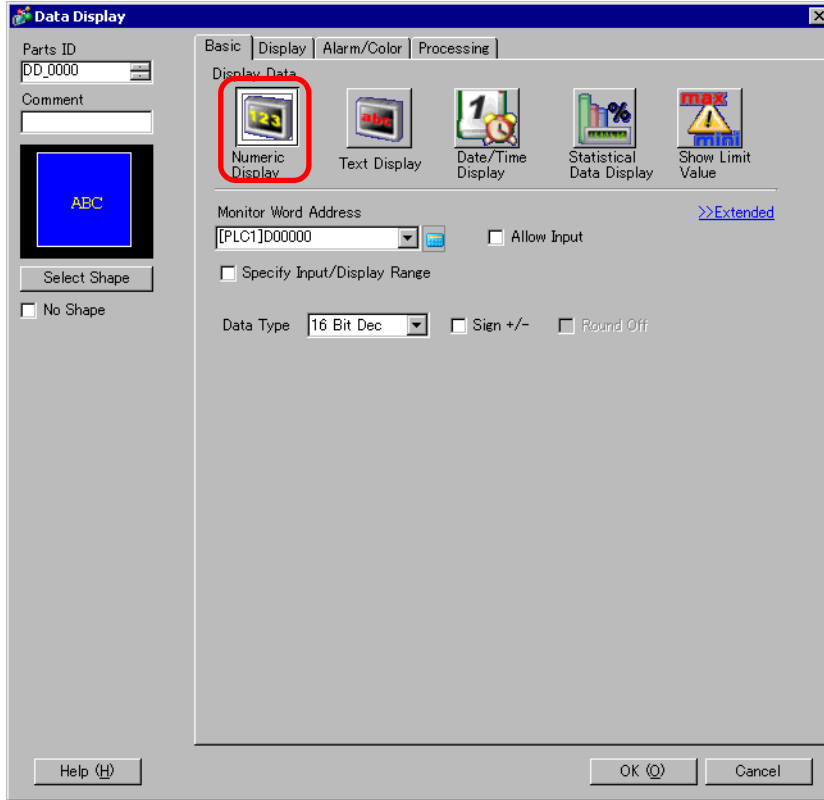


3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.

Select device "D", input "100" as the address, and press the Enter key.

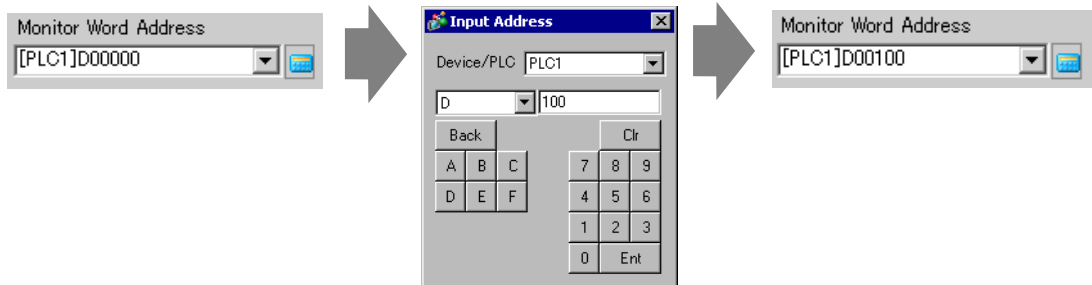


5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

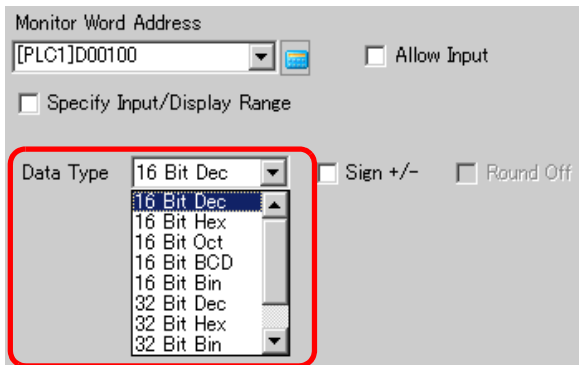


NOTE • Set [Specify Input/Display Range] so the numeric data can be converted comparatively and displayed.

6 Click the [Alarm/Color] tab, and click [Extended].

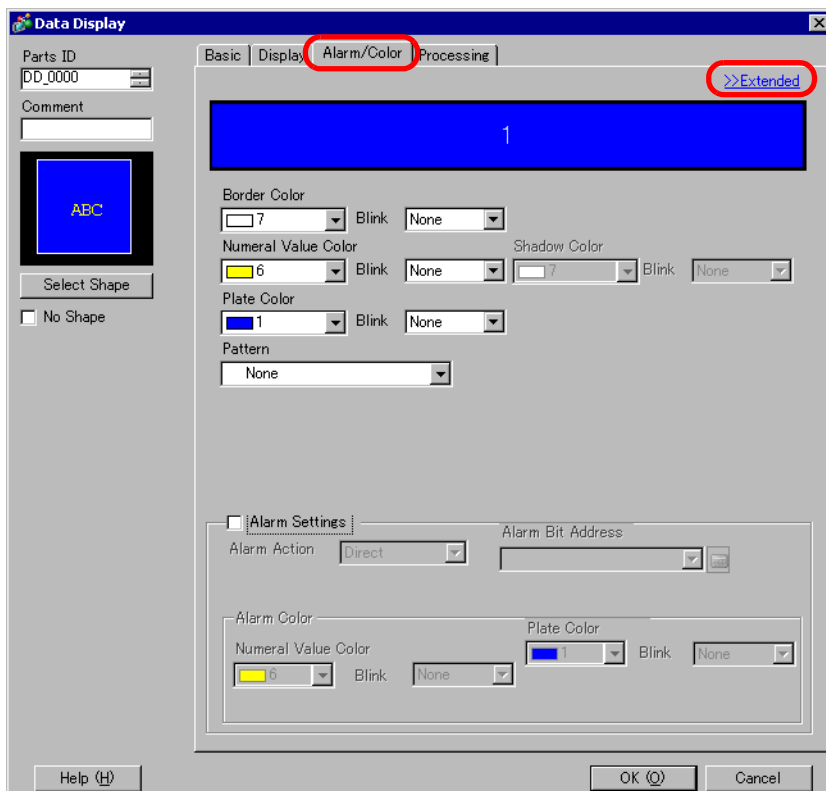


7 In [Ranges], set the number of ranges (for example, 4).

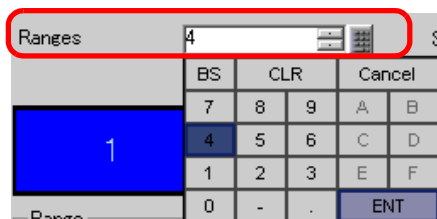

- 8 Select a method of specifying the range of minimum and maximum values in [Specify Range] from [Constant], [Address] (Constant).




- 9 Select 1 from the [Alarm Color Display Bar], set [Range 01]'s Max and Min. (for example, Min =0, Max =2000).

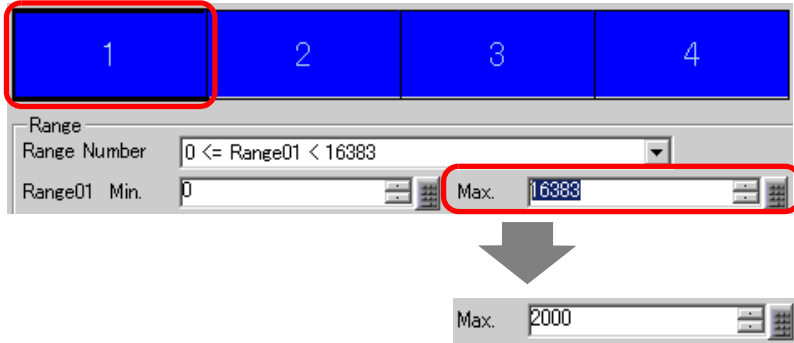

- 10 In [Alarm Color], set [Range 01]'s [Numeral Value Color] (for example, Yellow) and the [Plate Color] (for example, Blue).




- 11 Select 2 from [Alarm Color Display Bar] and set the [Range 02] Max and Min. (for example, Min = 2000, Max 5000).

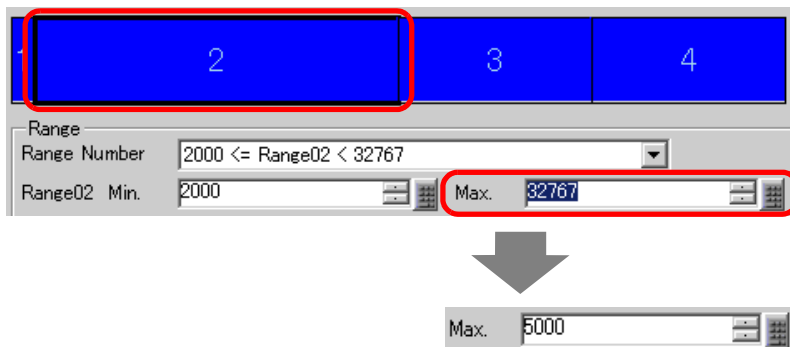

- 12 In [Alarm Color], set [Range 02]'s [Numeral Value Color] (for example, Yellow) and the [Plate Color] (for example, Red).




- 13 Select 3 from [Alarm Color Display Bar] and set the [Range 03] Min and Max. (for example, Min 000, Max 8000).

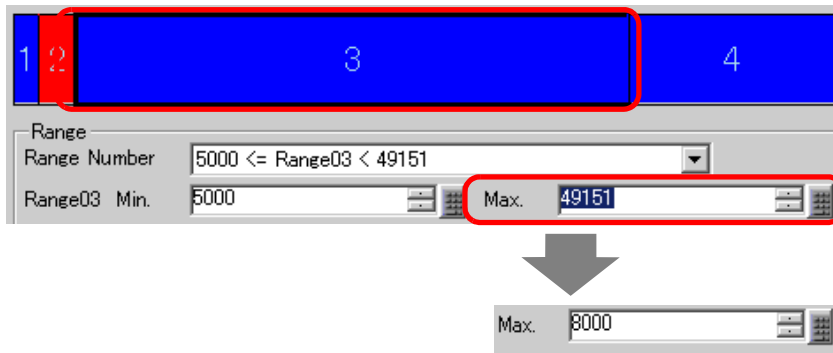

- 14 In [Alarm Color], set [Range 03]'s [Numeral Value Color] (for example, Black) and the [Plate Color] (for example, Yellow).



- 15 Select 4 from [Alarm Color Display Bar] and set the [Range 04] Min and Max. (for example, Min 8000).

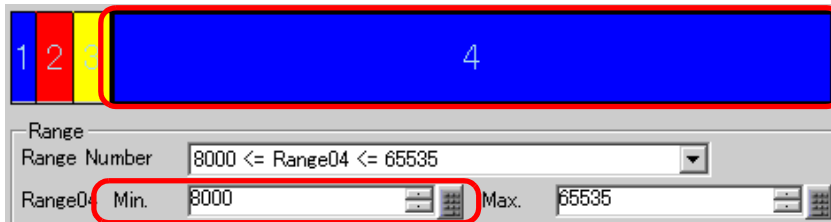

- 16 In [Alarm Color], set [Range 04]'s [Numeral Value Color] (for example, Yellow) and the [Plate Color] (for example, Blue).



- 17 If necessary, set the Data Display text on the [Display] tab, and click [OK].

14.6 Displaying the Date and Time

14.6.1 Introduction

2005/01/20 (Thu) 09:32


The GP clock and calendar data are stored in a designated area of the System Data Area.

14.6.2 Setup Procedure


NOTE

- Please refer to the Settings Guide for details.
 ☞ “14.11.3 Date/Time Display” (page 14-97)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 ☞ “8.6.1 Editing Parts” (page 8-52)

2005/01/20 (Thu) 09:32


1 On the [Part (P)] menu, select [Data Display (D)] and then click [Text Display (S)], or click  , to place it on the screen.

2 Double-click the placed Data Display. The following dialog box appears.

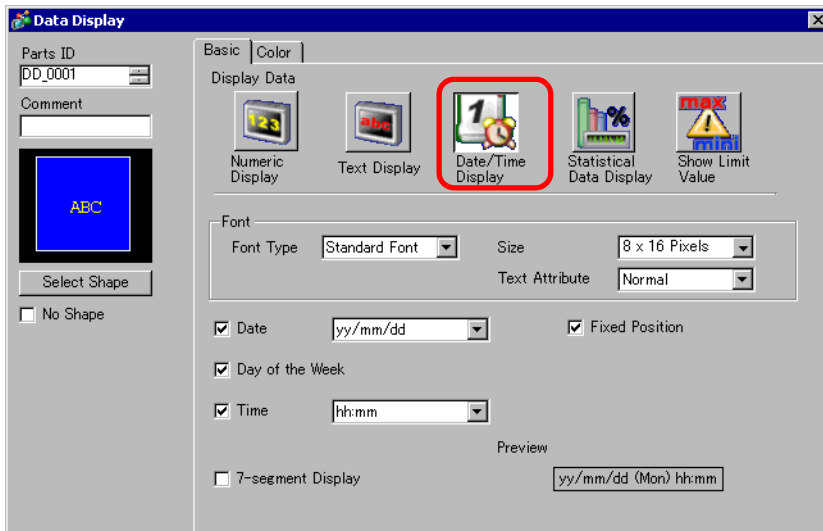


3 Select the Data Display shape from [Select Shape].

- 4 Choose a font for the date/time in [Font]. (For example, Standard Font, Size = 8X16 dots, Text Attribute = Standard)

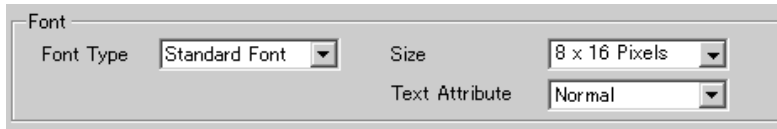

- 5 Select a date format in [Date]. (For example, 20yy/mm/dd)

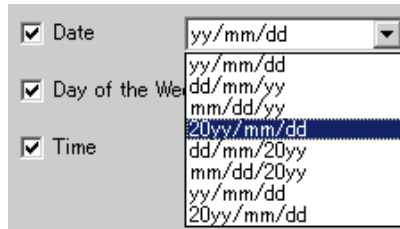

- 6 To display the day, select the [Day of the Week] check box. (For example, Display day)

- 7 Select a time format in [Time]. (For example, hh:mm)




- 8 As needed, set the Data Display color on the [Color] tab, and click [OK].

14.7 Preventing Operational Errors By Using Interlock


14.7.1 Introduction

The touch action will only be executed if the bit address specified in the Interlock Address meets the Touch Enable Condition.

- When the Touch Enable Condition is "Bit ON".
The touch action will only work when the set Interlock Address is ON.

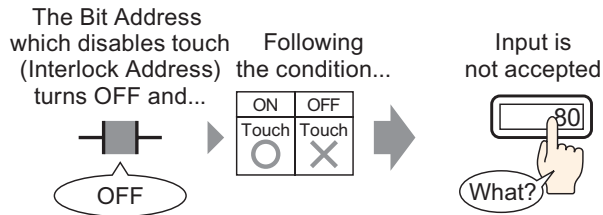

- When the Touch Enable Condition is "Bit OFF".
The touch action will only work when the set Interlock Address is OFF.

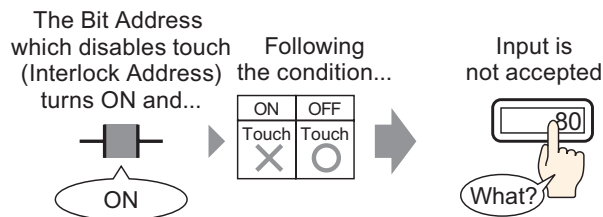


NOTE


- You can set up an interlock (Global Interlock) for the whole project.
☞ "21.4 Disable All Touch Operations for the Timing" (page 21-10)


14.7.2 Setup Procedure

NOTE

- Please refer to the Settings Guide for details.
 - ☞ “14.11.1 Numeric Display” (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 - ☞ “8.6.1 Editing Parts” (page 8-52)

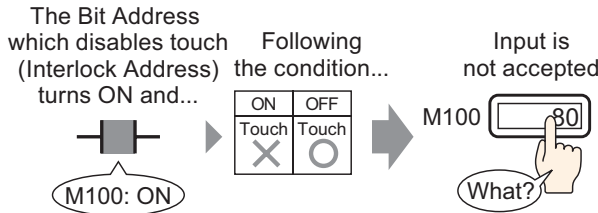


- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.
- 2 Double-click the placed Data Display. The following dialog box appears.

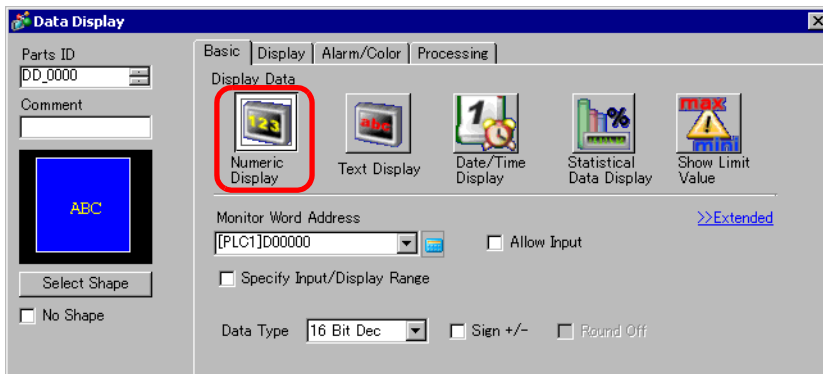


- 3 Select the Data Display shape from [Select Shape].
- 4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

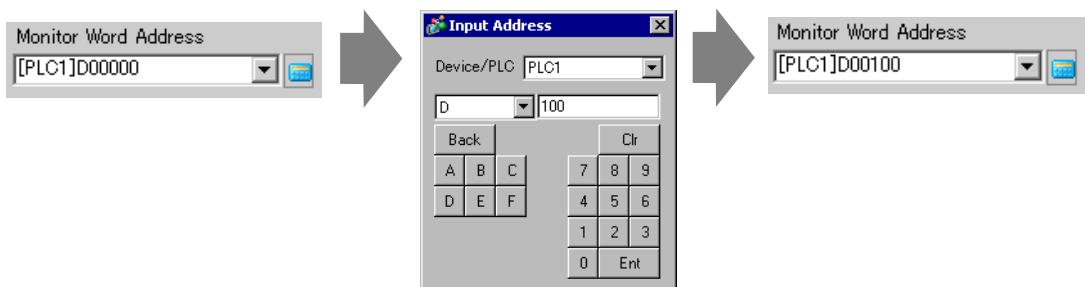


5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

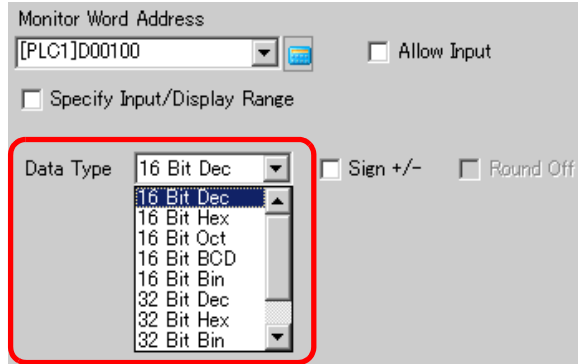


6 Select the [Allow Input] check box to display the [Data Entry] tab. Ensure the [Enable Popup Keypad] check box is selected. You can enter numerical data from the pop-up keypad.

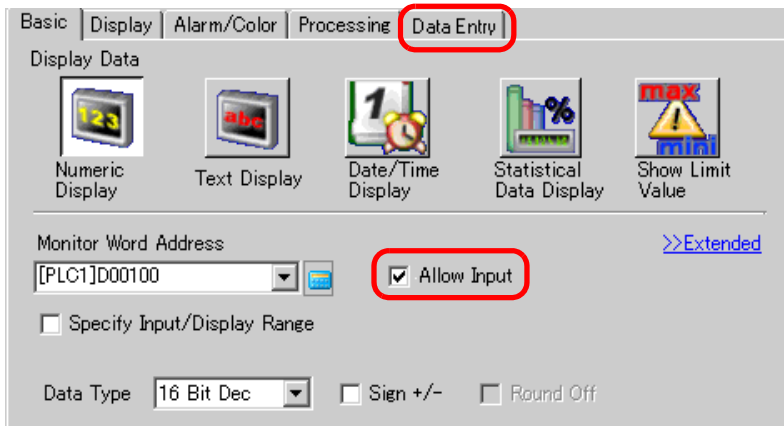

7 On the [Data Entry] tab, click [Extended]. The following dialog box appears.

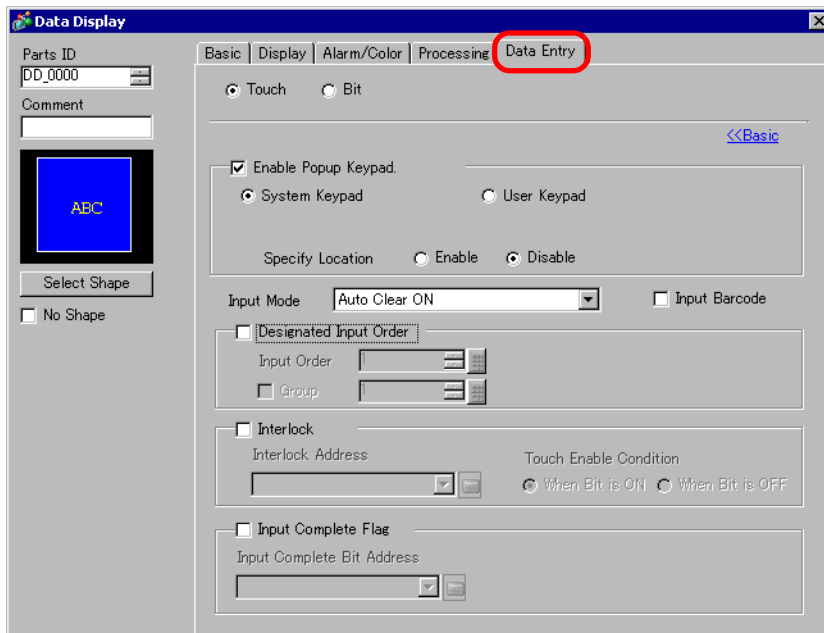


- 8 Select the [Interlock] check box, then in the [Interlock Address] field specify the bit address (M100) that will enable touch operations.

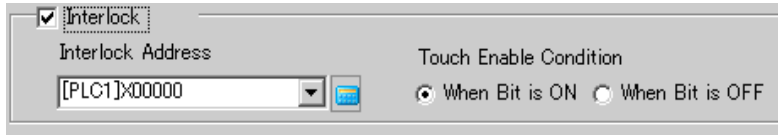

The screenshot shows a configuration dialog box with the following elements:

- A checked checkbox labeled "Interlock".
- A text field labeled "Interlock Address" containing the text "[PLC1]:X00000".
- A "Touch Enable Condition" section with two radio buttons: "When Bit is ON" (selected) and "When Bit is OFF".

- 9 In the [Touch Enable Condition] field specify the condition that will enable touch operations (for example, "When bit OFF" for the touch operations are enabled when the bit is OFF).




The screenshot shows a close-up of the "Touch Enable Condition" section with two radio buttons: "When Bit is ON" and "When Bit is OFF". The "When Bit is OFF" radio button is selected and highlighted with a dashed border.

- 10 As needed, set the Data Display color and text on the [Alarm/Color] tab and [Display] tab, and click [OK].

14.8 Prevent Entering Data Outside the Allowed Range


14.8.1 Introduction

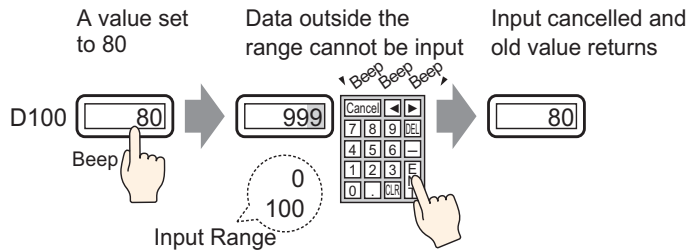


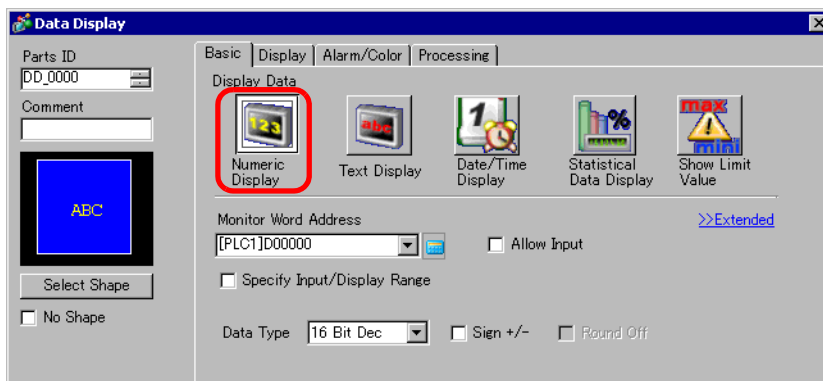
14.8.2 Setup Procedure

NOTE

- Please refer to the Settings Guide for details.
 ☞ “14.11.1 Numeric Display” (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 ☞ “8.6.1 Editing Parts” (page 8-52)

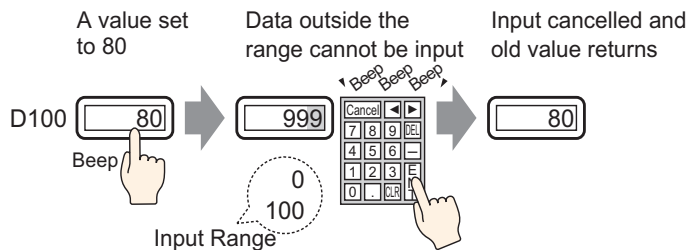

- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.
- 2 Double-click the placed Data Display. The following dialog box appears.




- 3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

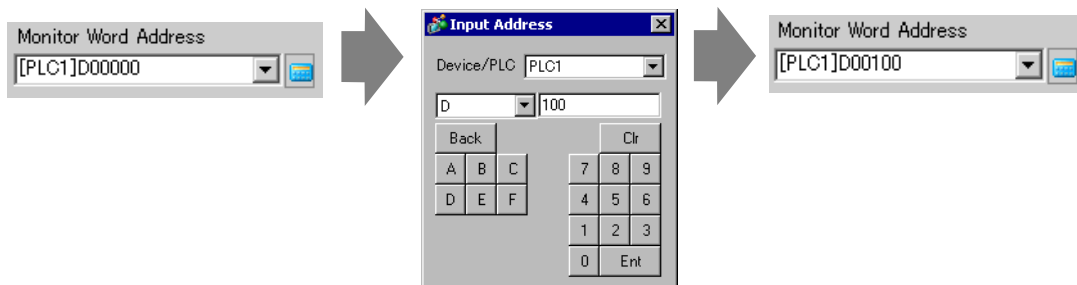


5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

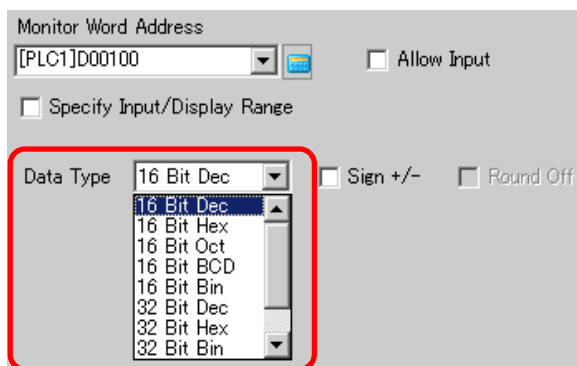

6 Select the [Allow Input] check box to display the [Data Entry] tab. Ensure the [Enable Pop-up Keypad] check box is selected. You can enter numerical data from the pop-up keypad.

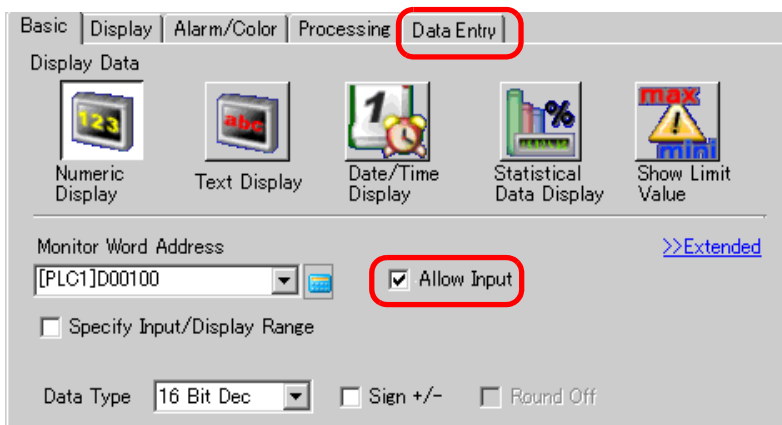


7 Click the [Alarm/Color] tab, and select the [Alarm Settings] check box.

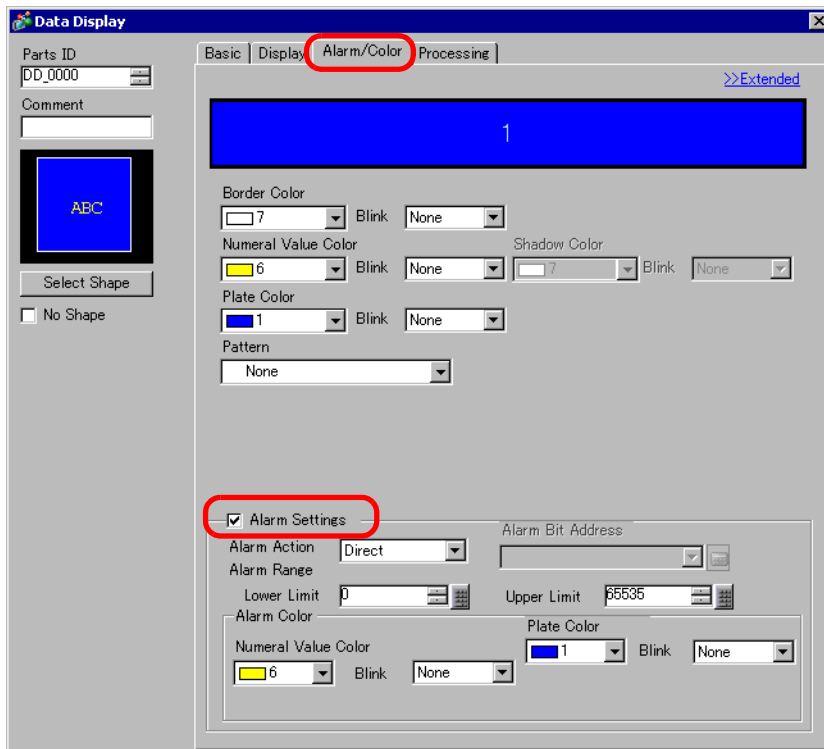

8 In [Alarm Action], select the Upper/Lower Limit Value specification method from [Direct] or [Address] (in this example, [Direct]).



9 In [Alarm Range], set the Upper Limit (for example, 100) and Lower Limit (for example, 0).

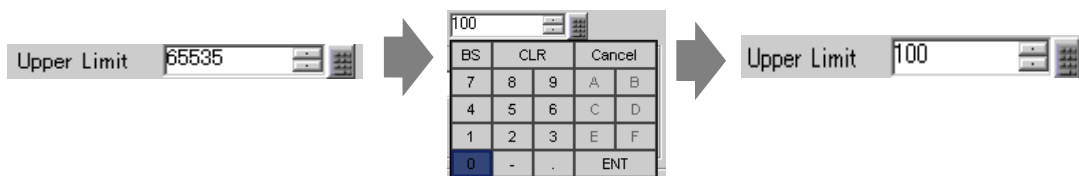


10 As needed, set the Data Display color and text on the [Alarm/Color] tab and [Display] tab, and click [OK].

NOTE

- There are no input restrictions on the values input from the PLC.

14.9 8 x16 Dots Sequential Input

14.9.1 Introduction

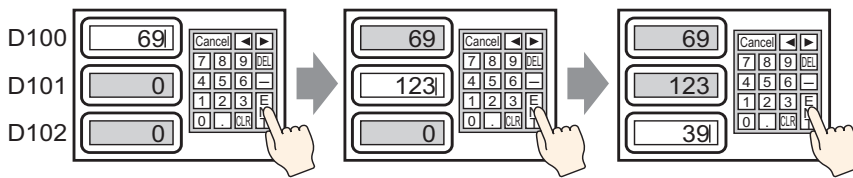


Input data and touch the [Ent] key

The input is confirmed and the next Data Display part in the input order enters the Input Permit state. → Input data and touch the [Ent] key

14.9.2 Setup Procedure


NOTE

- Please refer to the Settings Guide for details.
☞ "14.11.1 Numeric Display" (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
☞ "8.6.1 Editing Parts" (page 8-52)

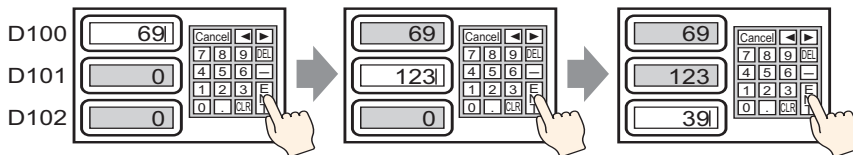


Input data and touch the [Ent] key.

The input is confirmed and the next Data Display part in the input order enters the Input Permit state. → Input data and touch the [Ent] key.

- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.

2 Double-click the placed Data Display. The following dialog box appears.

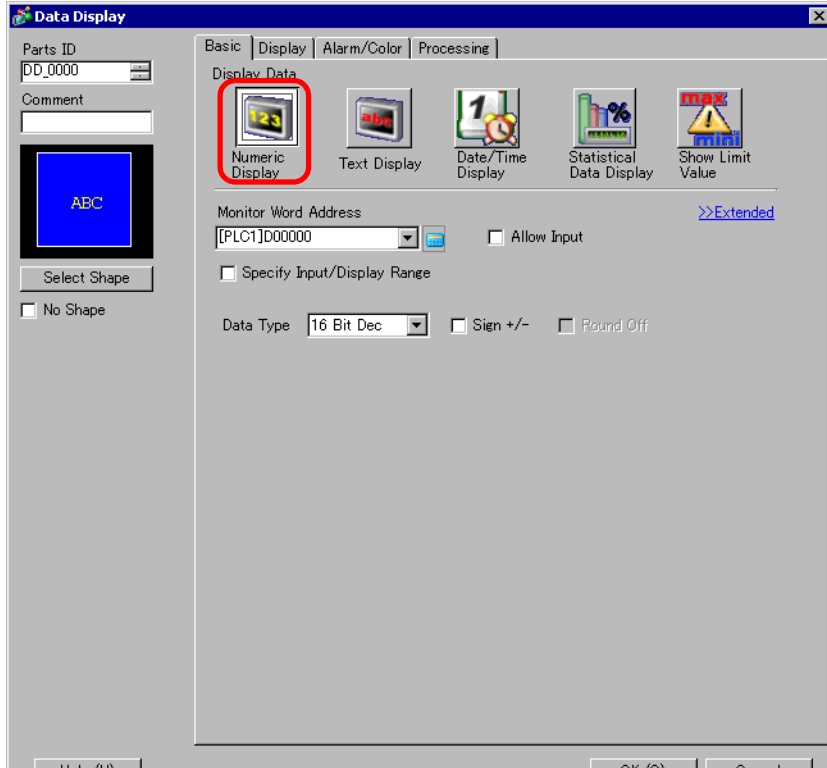


3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.

Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

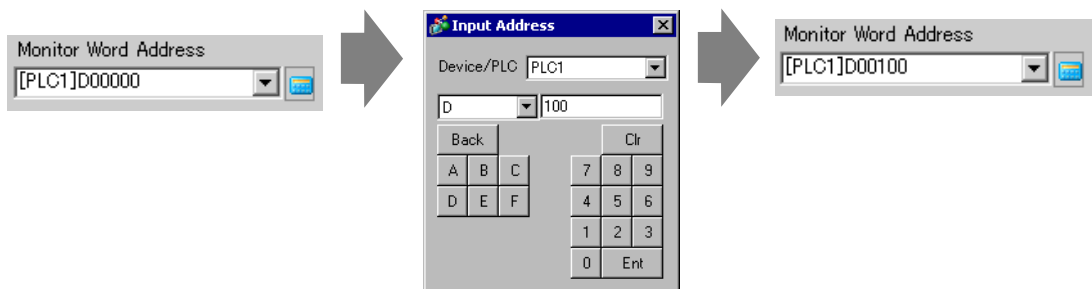


5 In the [Data Type] drop-down list, set the type of data to display (for example "16 Bit Dec").

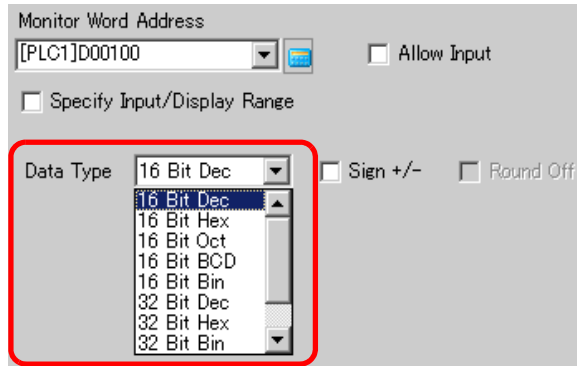

6 Select the [Allow Input] check box to display the [Data Entry] tab. Ensure the [Enable Popup Keypad] check box is selected. You can enter numerical data from the pop-up keypad.

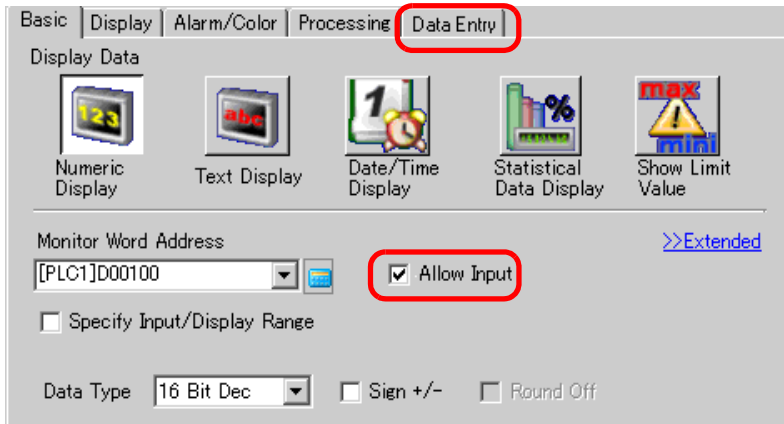

7 Click the [Data Entry] tab, and select the [Designated Input Order] check box.



8 In [Input Order], set the order the part will enter input status (for example, 1).



9 As needed, set the Data Display color and text on the [Alarm/Color] tab and [Display] tab, and click [OK].

NOTE

- In the same way, to set the 2nd Data Display that will enter the Allow Input state, set [Monitor Word Address] to "D101", and [Input Order] to "2". For the 3rd Data Display that will enter the Allow Input state, set [Monitor Word Address] to "D102", and [Input Order] to "3".
- For information about the Input Order settings, refer to "14.13.1 Set Input Order" (page 14-110) .

14.10 Changing Values by Adding/Subtracting

14.10.1 Introduction




When you use a word switch's Add/Subtract Data function, the directly referenced data in a Data Display can be modified. This is useful for fine-tuning and small-scale adjustments. This setup is an option for increasing or decreasing values. When the value rolls over, it carries over changes to other digits.

14.10.2 Setup Procedure


NOTE

- Please refer to the Settings Guide for details.
 ☞ "14.11.1 Numeric Display" (page 14-41)
- For details of the part placement method and the address, shape, color, and label setting method, refer to the "Part Editing Procedure".
 ☞ "8.6.1 Editing Parts" (page 8-52)



- 1 On the [Part (P)] menu, select [Data Display (D)] and then click [Numeric Display (N)], or click the  icon, and place it on the screen.

2 Double-click the placed Data Display. The following dialog box appears.

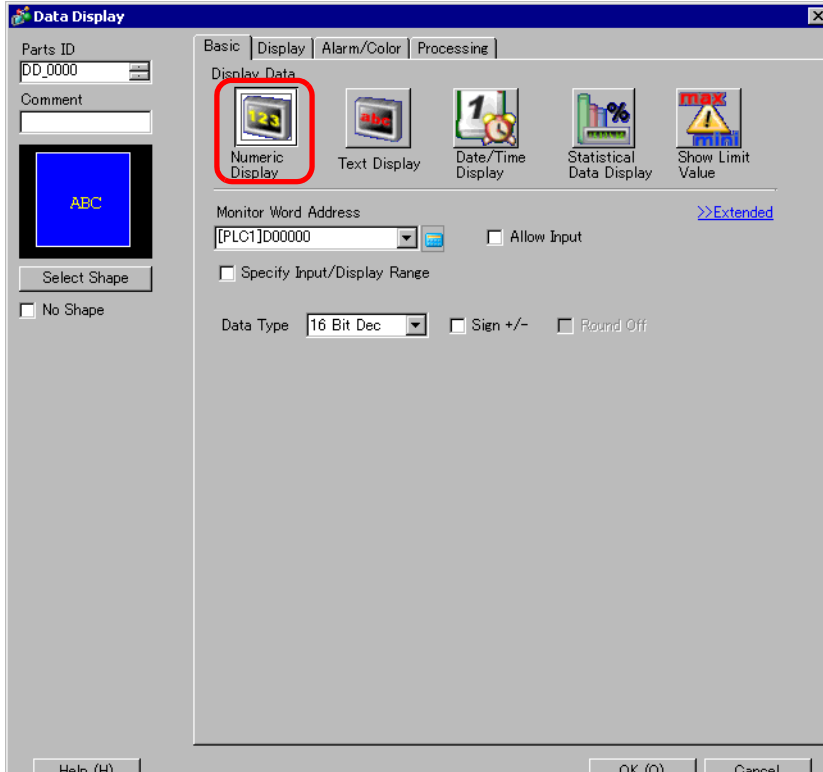


3 Select the Data Display shape from [Select Shape].


4 In [Monitor Word Address], set the address (D100) that will store the Value to display.


Click the icon to display an address input keypad.


Select device "D", input "100" as the address, and press the Enter key.

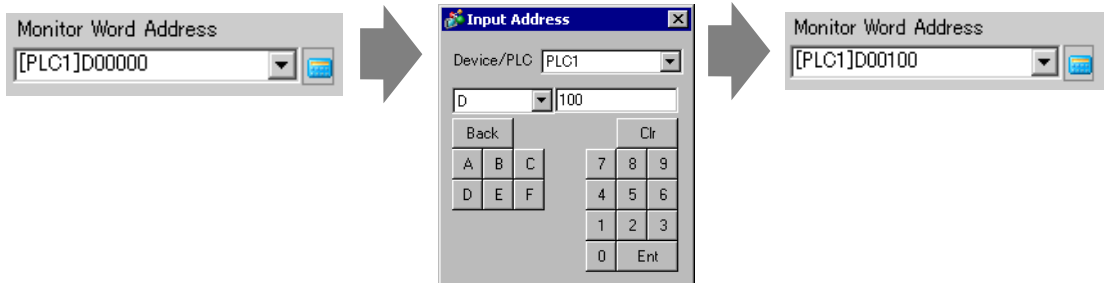


5 Set the type of data that will be displayed (for example, "16 Bit Bin") in [Data Type].




- 6 As needed, set the Data Display color and text on the [Alarm/Color] tab and [Display] tab, and click [OK].
- 7 Next, set the switch which will operate the addition action. Select the [Part (P)] menu - [Switch/Lamp] option - [Word Switch] command, or click , and place it on the screen.
- 8 Double-click the placed Switch part. The following dialog box appears.

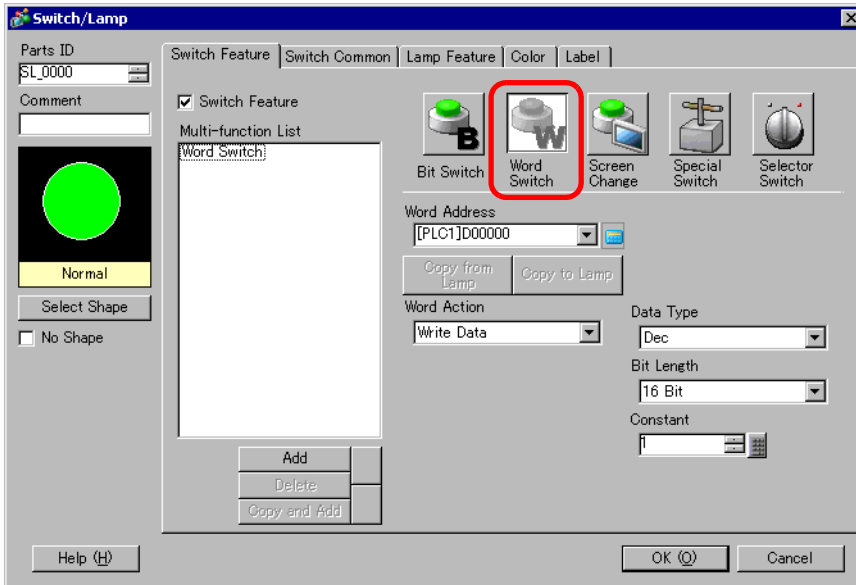


- 9 In [Select Shape], select the Switch shape.
- 10 Set the address (D100) where you want to write data when you touch the switch in [Word Address].




- 11 From [Word Action] choose [Add Data].




- 12 Set the address (D100) which will add the data in [Addition Base Word Address].




13 Set [Data Type] to [Bin] and [Constant] to "1" and click [OK]. The addition action's Word switch function is now set.




14 Next, set the switch which will operate the subtraction action. From the [Part (P)] menu, point to [Switch Lamp] and select [Word Switch], or click  and place it on the screen.

15 Double-click the placed Switch part. The following dialog box appears.

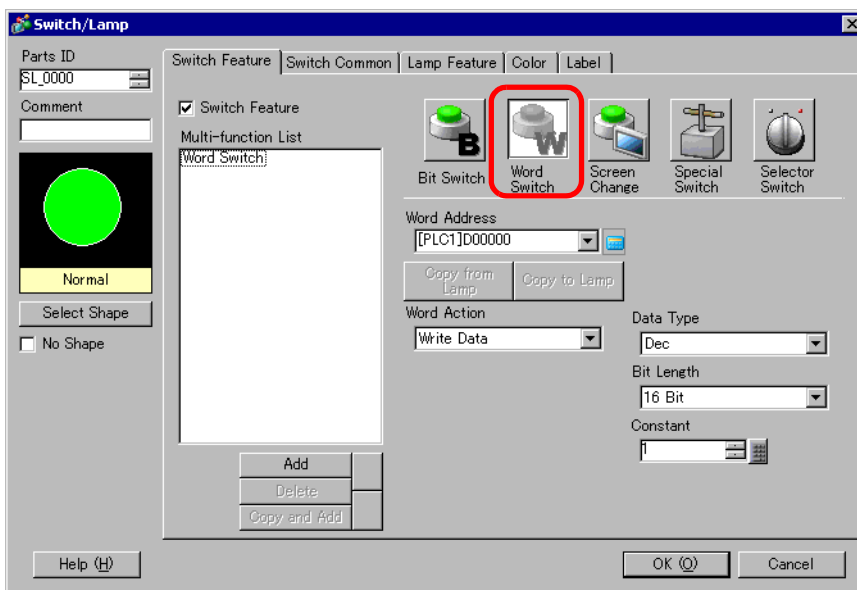


16 In [Select Shape], select the Switch shape.


17 Set the address (D100) where you want to write data when you touch the switch in [Word Address].




18 Choose [Subtract Data] from [Word Action].




19 Set the address (D100) which will subtract the data in [Subtraction Base Word Address].



20 Set [Data Type] to [Bin] and [Constant] to "1" and click [OK]. The subtraction action's Word switch function is now set.




14.11 Data Display Settings Guide

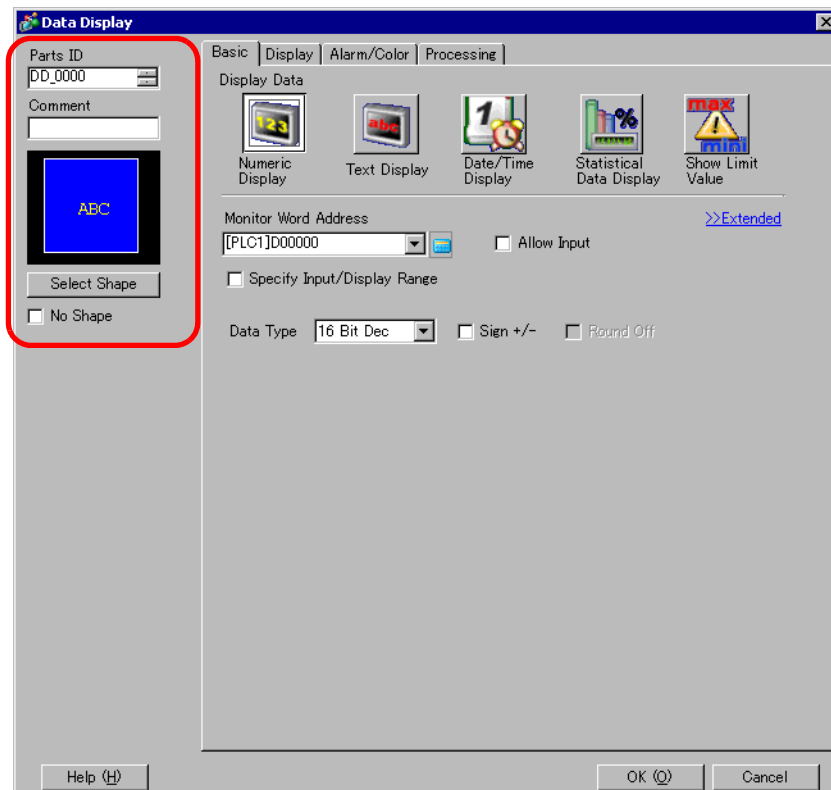

| Setting | Description |
|---------------|--|
| Parts ID | Parts are automatically assigned an ID number. Data Display's ID: DD_ **** (4 digits) The letter portion is fixed. The number portion can be modified from 0000 to 9999. |
| Comment | The comment for each Part can be up to 20 characters long. |
| Shape Display | Displays the shape and status of the Part selected in [Select Shape]. |


Continued
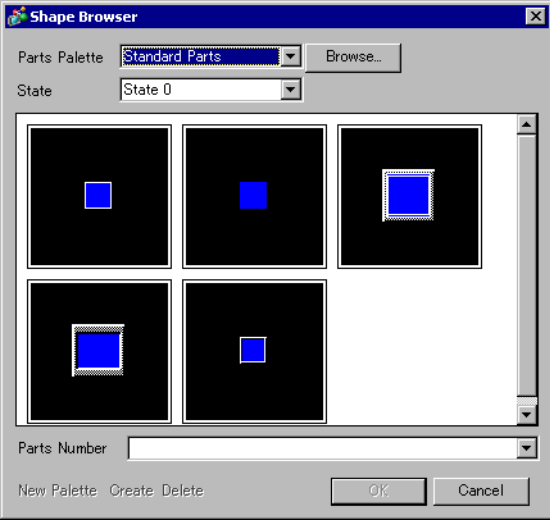
| Setting | Description |
|--------------|--|
| Select Shape | <p>Open the Select Shape dialog box to choose the shape.</p>  |
| Display Data | <p>Select the Data Display type.</p> <ul style="list-style-type: none"> • Numeric Display Displays the numeric data stored in the Word Address. ☞ “14.11.1 Numeric Display” (page 14-41) • Text Display Displays the character string stored in the Word Address. ☞ “14.11.2 Text Display” (page 14-81) • Date/Time Display Refers to the GP clock data and displays the date/time. ☞ “14.11.3 Date/Time Display” (page 14-97) • Statistical Data Display Takes statistics from the successive values of multiple Word Addresses, and displays the numeric value. ☞ “14.11.4 Statistical Data Display” (page 14-100) • Show Limit Value Displays the set Alarm values (the displayed data's upper/lower limit values) on the same screen as a Numeric Display with [Alarm]. ☞ “14.11.5 Show Limit Value” (page 14-105) |
| No Shape | <p>Select whether the part will be transparent with no shape.</p> |

14.11.1 Numeric Display

■ Basic Settings/Basic

Display numeric data stored in a specified Word Address in a Device/PLC.

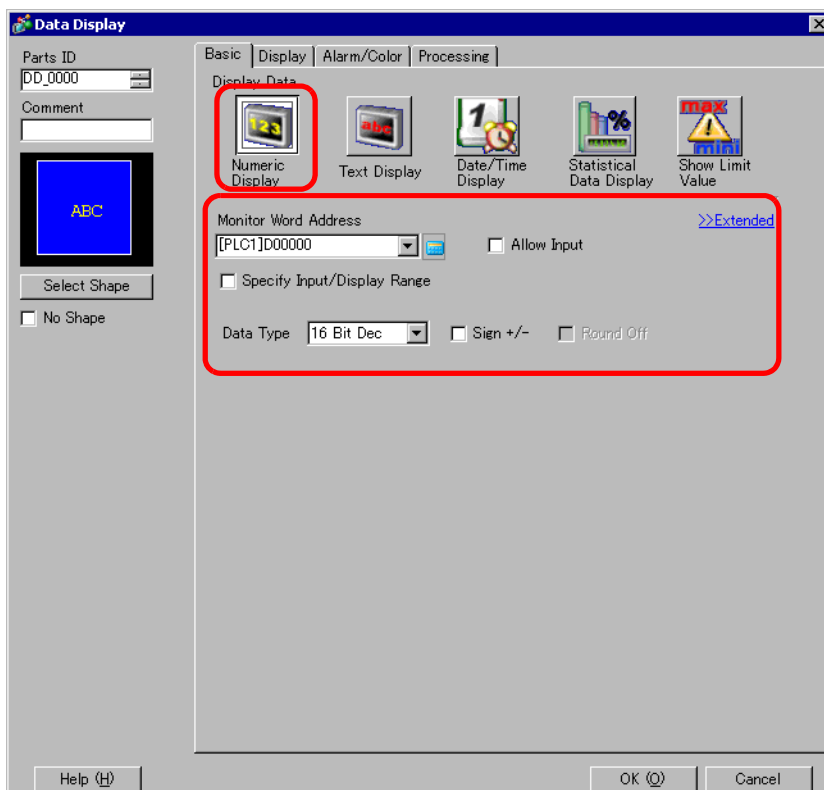


| Setting | Description |
|-----------------------------|---|
| Monitor Word Address | <p>The data stored in this Word Address will be displayed in real-time as a numeric value.</p> <p>NOTE</p> <ul style="list-style-type: none"> Real variables cannot be displayed because they are 64 bits in length. |
| Allow Input | <p>Set whether keypad and barcode reader input will be accepted by the Data Display.</p> <p>NOTE</p> <ul style="list-style-type: none"> This cannot be set if the [Display Format] option is set on the [Display] tab's [Details] screen. <p>☞ “ ■ Data Entry/Basic” (page 14-54)</p> |
| Specify Input/Display Range | <p>Specify an input/display range and [Monitor Word Address] data will automatically convert to correspond with the input and display range. The resulting numeric values can display.</p> |

Continued



| Setting | Description | | | | | | |
|------------|--|------------|-----------|--------|-------------------------|--------|---------------------------|
| Data Type | <p>Select the type of data to be displayed.</p> <table border="1"> <thead> <tr> <th>Bit Length</th> <th>Data Type</th> </tr> </thead> <tbody> <tr> <td>16 Bit</td> <td>Dec, Hex, Oct, Bin, BCD</td> </tr> <tr> <td>32 bit</td> <td>Dec, Hex, Bin, BCD, Float</td> </tr> </tbody> </table> <p>NOTE</p> <ul style="list-style-type: none"> When using 32-bit data, the relationship of high order and low order Word data will differ according to the device/PLC type. For more information, refer to your device/PLC manual. The Float format is IEEE754. | Bit Length | Data Type | 16 Bit | Dec, Hex, Oct, Bin, BCD | 32 bit | Dec, Hex, Bin, BCD, Float |
| Bit Length | Data Type | | | | | | |
| 16 Bit | Dec, Hex, Oct, Bin, BCD | | | | | | |
| 32 bit | Dec, Hex, Bin, BCD, Float | | | | | | |
| Sign +/- | <p>Defines negative number support for display data. Negative values are handled using 2's Complement.</p> <p>This setting is available when [Data Type] is [Dec].</p> | | | | | | |
| Round Off | <p>Sets whether to round off fractional values in the display data. When fractional values are not rounded, the number is truncated.</p> <p>This setting is available when [Data Type] is [Float].</p> | | | | | | |

Sets up numeric data as a relative value.

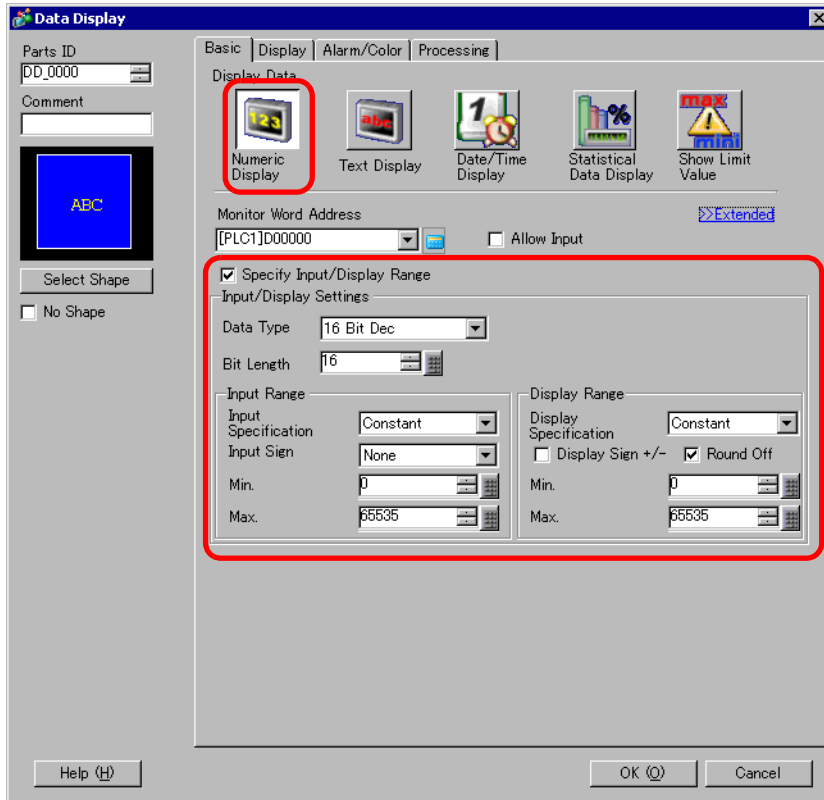

| Setting | | Description | | | | | | |
|-----------------------------|---------------------------|--|------------|-----------|--------|-------------------------|--------|---------------------------|
| Specify Input/Display Range | | <p>Specify an input/display range and [Monitor Word Address] data will automatically convert to correspond with the input and display range. The resulting numeric values can display. (Display relative values)</p> <p>For example,</p> <p style="text-align: center;">Input Range Display Range</p> <p style="text-align: center;">4095 100</p> <p>1027 is stored in the Display Word Address</p> <p style="text-align: center;">0 0</p> <p style="text-align: right;">Displayed value becomes 25</p> | | | | | | |
| Data Type | | <p>Select the type of data to be displayed.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Bit Length</th> <th>Data Type</th> </tr> </thead> <tbody> <tr> <td>16 Bit</td> <td>Dec, Hex, Oct, Bin, BCD</td> </tr> <tr> <td>32 bit</td> <td>Dec, Hex, Bin, BCD, Float</td> </tr> </tbody> </table> | Bit Length | Data Type | 16 Bit | Dec, Hex, Oct, Bin, BCD | 32 bit | Dec, Hex, Bin, BCD, Float |
| Bit Length | Data Type | | | | | | | |
| 16 Bit | Dec, Hex, Oct, Bin, BCD | | | | | | | |
| 32 bit | Dec, Hex, Bin, BCD, Float | | | | | | | |
| Bit Length | | <p>Specify the address' valid bit length from 1 to 16. Selectable only when [Data Type] is specified as [16 Bits].</p> | | | | | | |
| Input Range | Input Specification | <p>Choose how the input range's max and min values is specified.</p> <ul style="list-style-type: none"> • Constant Designate a set constant as the Min/Max value. (Direct Specification) • Address Designate the address where the Min/Max values are stored. (Indirect Specification) | | | | | | |
| | Input Sign | <p>Specifies whether input data will be able to handle negative numeric data.</p> <ul style="list-style-type: none"> • None Only positive numeric data. • 2's Complement Negative numbers are handled with 2's complement. • MSB Sign Negative numbers are handled with MSB sign. | | | | | | |
| | Display Specification | <p>Choose how the max and min values of the display range will be specified.</p> <ul style="list-style-type: none"> • Constant Designate a set constant as the Min/Max value. (Direct Specification) • Address Designate the address where the Min/Max values are stored. (Indirect Specification) | | | | | | |
| | Round Off | <p>Select whether fractions get rounded off when data displays.</p> | | | | | | |

Continued

| Setting | | Description |
|-------------------------------|---------------------------|--|
| Display Range | Display Sign +/- | <p>Set to display negative numbers. This can be set when the [Data Type] is [Dec]. For example: When writing "-123"</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Sign +/-  Negative numbers displayed </div> <div style="text-align: center;"> <input type="checkbox"/> Sign +/-  Negative numbers not displayed </div> </div> |
| Input Range/ Display Range | Min. Value/ Max. Value | <p>Select the input range and display range for the numeric display data. If [Input Specification] or [Display Specification] is [Constant], you can input a min/max value. If [Address] is set, specify the Word Address where the min/max value will be stored. Each [Data Type], [Input Sign], and [Display Sign +/-] has a different size range</p> |

Continued


| Setting | | Description | | | | | | |
|-------------------------------|---------------------------|-------------|------------|----------------|-------------------|---|------------------|---|
| Input Range/ Display Range | Min. Value/ Max. Value | . | Bit Length | Data Type | Input Sign | Input Range | Display Sign +/- | Display Range |
| | | | 16 Bit | Dec | None | 0 to 65535 | Disable | 0 to 65535 |
| | | | | | Enable | -32,768 to 32,767 | | |
| | | | | | 2's Complement | -32,768 to 32,767 | Disable | 0 to 65535 |
| | | | | Enable | -32,768 to 32,767 | | | |
| | | | | MSB Sign | -32767 to 32767 | Disable | 0 to 65535 | |
| | | | | Enable | -32,768 to 32,767 | | | |
| | | | | Hex | None | 0 to 65535 | - | 0 to FFFF(h) |
| | | | | | 2's Complement | -32,768 to 32,767 | - | 0 to FFFF(h) |
| | | | | | MSB Sign | -32767 to 32767 | - | 0 to FFFF(h) |
| | | | Oct | None | 0 to 65535 | - | 0 to 177777(o) | |
| | | | | 2's Complement | -32,768 to 32,767 | - | 0 to 177777(o) | |
| | | | | MSB Sign | -32767 to 32767 | - | 0 to 177777(o) | |
| | | | BCD | - | 0 to 9999 | - | 0 to 9999 | |
| | | | Bin | None | 0 to 65535 | - | 0 to FFFF(h) | |
| | | | | 2's Complement | -32,768 to 32,767 | - | 0 to FFFF(h) | |
| | | | | MSB Sign | -32767 to 32767 | - | 0 to FFFF(h) | |
| | | | 32 bit | Dec | None | 0 to 4294967295 | Disable | 0 to 4294967295 |
| | | | | | | | Enable | -2147483648 to 2147483647 |
| | | | | | 2's Complement | -2147483648 to 2147483647 | Disable | 0 to 4294967295 |
| | | | | | | | Enable | -2147483648 to 2147483647 |
| | | | | | MSB Sign | -2147483647 to 2147483647 | Disable | 0 to 4294967295 |
| | | | | | | | Enable | -2147483648 to 2147483647 |
| | | | | Hex | None | 0 to 4294967295 | - | 0 to FFFFFFFF(h) |
| | | | | | 2's Complement | -2147483648 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | | | | MSB Sign | -2147483647 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | | | BCD | - | 0 to 99999999 | - | 0 to 99999999 |
| | | | | Bin | None | 0 to 4294967295 | - | 0 to FFFFFFFF(h) |
| | | | | | 2's Complement | -2147483648 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | | | | MSB Sign | -2147483647 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | | | Float | - | -9.9e ¹⁶ to 9.9e ¹⁶ | - | -9.9e ¹⁶ to 9.9e ¹⁶ |

NOTE

- The Input Range and Display Range define how to convert values for display. If the value is outside the input range, the value is converted and displayed using the same ratio.




■ Basic Settings/Extended

There are two ways to indirectly specify the address for a numeric display.

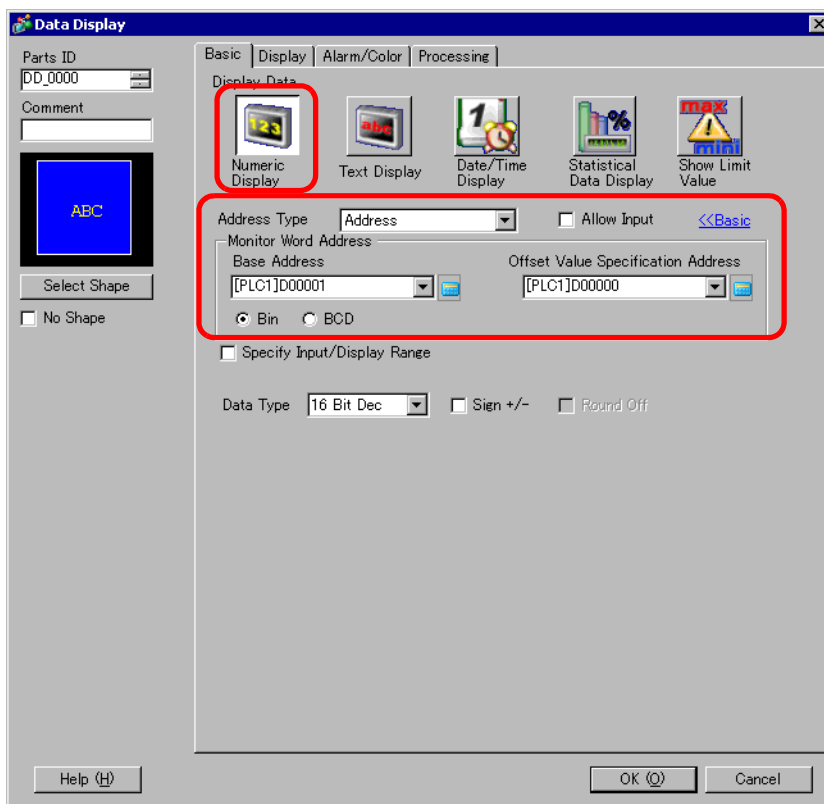


| Setting | Description |
|----------------------|---|
| Address Type | You can define the display address (Monitor Word Address) in the following ways: [Direct Specification], [Address], or [Device Type & Address]. |
| Allow Input | You can accept input from a keypad, bar code reader, or a two-dimensional bar code reader. Select this check box to display the [Data Entry] tab. <div style="border: 1px solid black; padding: 2px; width: fit-content;"> NOTE </div> <ul style="list-style-type: none"> This cannot be set if the [Display Format] option is set on the [Display] tab's [Details] screen. ☞ “■ Display Settings/Basic” (page 14-65) |
| Monitor Word Address | You can have a real-time numeric display of data stored in the Word Address specified here. To indirectly specify the Monitor Word Address, in the [Address Type] list, select [Address] or [Device Type & Address]. |
| Address | Indirectly designates to the device specified in [Base Address]. |

Continued
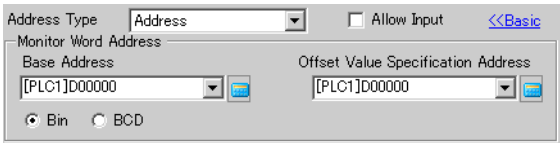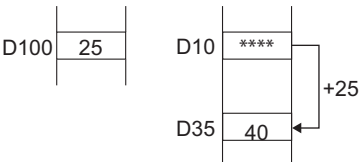
| Setting | | Description | |
|----------------------|------------|--|---|
| Monitor Word Address | Address |  <p>The [Base Address] becomes the standard indirectly designated address. In [Offset Value Specification Address], set the address that stores the offset value from the [Base Address]. For example: [Monitor Word Address] is D35, Indirectly designated [Base Address] = D10 [Offset Value Specification Address] = D100 The data in [Offset Value Specification Address] is handled as the offset value from the [Base Address].</p> <p>In the device/PLC</p>  <p>GP unit</p>  <p>The [Base Address] (D10) is added to the [Offset Value Specification Address] (D100)'s data, which is "25", and the resulting address D35's data "40" displays.</p> | |
| | | Bin, BCD | Choose the type of data stored in the [Offset Value Specification Address] from [Bin] or [BCD]. |
| | | Device Type & Address | Indirectly designates both the device and address. |
| | Device/PLC | When [Address Type] is [Device Type & Address], select which device/PLC's address to indirectly designate. | |


Continued
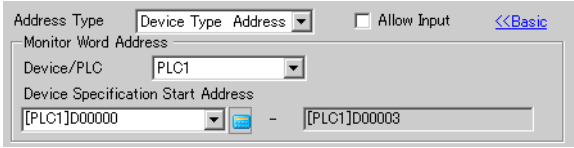
| Setting | | Description | | | | | | | | | | | | |
|----------------------|-----------------------|--|------|---|----------------------------|------|------|---------------------------|------|----|-----------------|------|---|-----------------|
| Monitor Word Address | Device Type & Address | <div style="display: flex; align-items: center;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg); margin-right: 10px;">Device Specification Start Address</div> <div>  <p>Enter the first of four consecutive word addresses used to define the indirect data display. The value stored in the [Device Specification Start Address] defines the address mode--whether the device address is an internal device address or an external (PLC) device address. The next three word addresses after the [Device Specification Start Address] store the device and address codes of the word address that actually stores the display value.</p> <p>For example: [Monitor Word Address] is CN35, Indirectly designated [Device Specification Start Address] = D100 [Address Mode] = External (PLC) Device [Device Code] = CN: 0061</p> <p>In the device/PLC</p> <table border="1" style="margin-right: 20px;"> <tr><td>D100</td><td>0</td><td>Address Mode^{*1}</td></tr> <tr><td>D101</td><td>0061</td><td>Device Code^{*2}</td></tr> <tr><td>D102</td><td>35</td><td>Address Code(L)</td></tr> <tr><td>D103</td><td>0</td><td>Address Code(H)</td></tr> </table> <p style="margin-right: 20px;">CN35 40 </p> <div style="border: 1px solid black; padding: 5px; display: inline-block;"> <div style="border: 2px solid black; padding: 5px; text-align: center; width: 40px; height: 40px; margin: 0 auto;">40</div> </div> <p>GP unit</p> <p>^{*1} Address Mode 0: External (PLC) Device 1: Internal Device In the above case, 0 is stored.</p> <p>^{*2} Please see the "GP-Pro EX Device/PLC Connection Manual" for device codes. If you select an internal device, the device codes are LS area: 0000 and USR area: 0001.</p> <p>The address designated by D100, D101, D102, and D103 is CN35. Its data, "40" displays.</p> </div> </div> | D100 | 0 | Address Mode ^{*1} | D101 | 0061 | Device Code ^{*2} | D102 | 35 | Address Code(L) | D103 | 0 | Address Code(H) |
| D100 | 0 | Address Mode ^{*1} | | | | | | | | | | | | |
| D101 | 0061 | Device Code ^{*2} | | | | | | | | | | | | |
| D102 | 35 | Address Code(L) | | | | | | | | | | | | |
| D103 | 0 | Address Code(H) | | | | | | | | | | | | |

NOTE

- If the indirectly-designated address is out of range or does not exist, a communication error will occur. An error can affect the screen update. When an error occurs, check the indirectly-designated data and write the correct value to the device/PLC address to restore the screen update.

On the [Basic] tab's Extended screen, when you set [Address Type] to [Address] or [Device Type & Address], and set the [Input/Display]'s [Input Specification] and [Display Specification] to [Address], the address that stores the max/min values for the Input Range/Display Range will be automatically allotted to the addresses following the Monitor Word Address.


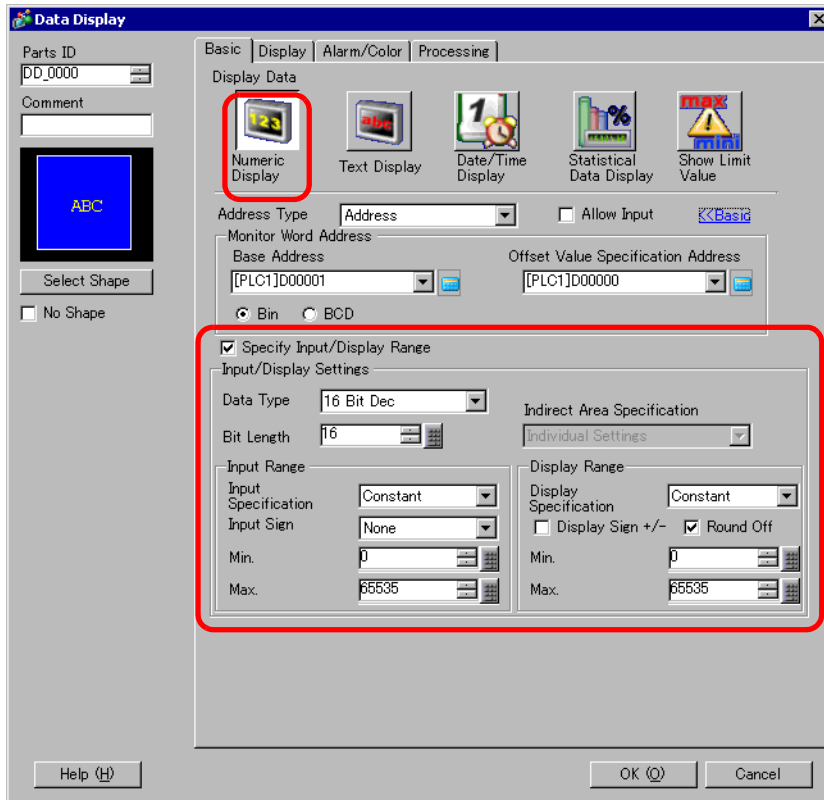


| Setting | Description |
|-----------------------------|--|
| Specify Input/Display Range | <p>Specify an input/display range and [Monitor Word Address] data will automatically convert to correspond with the input and display range. The resulting numeric values can display. (Display relative values)</p> <p>For example,</p> <div style="text-align: center;"> <p>Input Range: 0 to 4095 Display Range: 0 to 100</p> <p>1027 is stored in the Display Word Address Displayed value becomes 25</p> </div> |

Continued

| Setting | Description | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|--|------------------|-----------|---------------|-------------------------|--------|---------------------------|--|--|--|--|--|--------------------------|--------------|--|-----|-------------|--|-----|-------------|--|-----|---------|--|-----|---------|--|
| Data Type | Select the type of data to be displayed. <table border="1" data-bbox="570 214 1066 320" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Bit Length</th> <th>Data Type</th> </tr> </thead> <tbody> <tr> <td>16 Bit</td> <td>Dec, Hex, Oct, Bin, BCD</td> </tr> <tr> <td>32 bit</td> <td>Dec, Hex, Bin, BCD, Float</td> </tr> </tbody> </table> | Bit Length | Data Type | 16 Bit | Dec, Hex, Oct, Bin, BCD | 32 bit | Dec, Hex, Bin, BCD, Float | | | | | | | | | | | | | | | | | | | | |
| Bit Length | Data Type | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec, Hex, Oct, Bin, BCD | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 bit | Dec, Hex, Bin, BCD, Float | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bit Length | Specify the address' valid bit length from 1 to 16. Selectable only when [Data Type] is specified as [16 Bits]. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Indirect Area Specification | <p>If [Input Specification] and [Display Specification] are both [Address], choose the indirect designation method from [Individual Settings] or [Area After Display Address] for the Word Addresses that will store the Input Range and Display Range's upper/lower limit value.</p> <p>If either [Input Specification] or [Display Specification] is set to [Constant], the setting will be fixed as [Individual Settings].</p> <ul style="list-style-type: none"> • Individual Settings Specify the value or Word Address for [Min.] and [Max.] individually. • Area After Display Address In the [Basic] tab, the input and display ranges are stored in consecutive addresses that follow the [Monitor Word Address], for the Input Range Max value, Input Range Min value, Display Range Min value, and Display Range Max value. <p>For example: When [Indirect Area Specification] is set to [Area After Display Address], the min/max values for the input/display range will be as follows: [Base Address] = D10, [Offset Value Specification Address] = D100 [Monitor Word Address] = D35 [Input Specification] = [Address], [Display Specification] = [Address]</p> <div style="display: flex; align-items: flex-start; gap: 20px;"> <div data-bbox="403 1145 742 1271" style="border-left: 1px solid black; border-right: 1px solid black; padding: 5px;"> Offset Value Specification Address D100 25 </div> <div data-bbox="765 1166 1218 1435" style="border-left: 1px solid black; border-right: 1px solid black; padding: 5px;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Base Address D10</td> <td style="text-align: center;">****</td> <td rowspan="5" style="border-left: 1px solid black; border-right: 1px solid black; padding-left: 5px;"> } +25 ← </td> </tr> <tr><td style="border-bottom: 1px solid black;"> </td><td style="border-bottom: 1px solid black;"> </td></tr> <tr><td style="border-bottom: 1px solid black;"> </td><td style="border-bottom: 1px solid black;"> </td></tr> <tr><td style="border-bottom: 1px solid black;"> </td><td style="border-bottom: 1px solid black;"> </td></tr> <tr><td style="border-bottom: 1px solid black;"> </td><td style="border-bottom: 1px solid black;"> </td></tr> <tr> <td>Monitor Word Address D35</td> <td>Display Data</td> <td></td> </tr> <tr> <td>D36</td> <td>Input Range</td> <td></td> </tr> <tr> <td>D37</td> <td>Input Range</td> <td></td> </tr> <tr> <td>D38</td> <td>Display</td> <td></td> </tr> <tr> <td>D39</td> <td>Display</td> <td></td> </tr> </table> </div> </div> | Base Address D10 | **** | } +25 ← | | | | | | | | | Monitor Word Address D35 | Display Data | | D36 | Input Range | | D37 | Input Range | | D38 | Display | | D39 | Display | |
| Base Address D10 | **** | } +25 ← | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Monitor Word Address D35 | Display Data | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D36 | Input Range | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D37 | Input Range | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D38 | Display | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D39 | Display | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | | Description |
|---------------|-----------------------|--|
| Input Range | Input Specification | <p>Choose how the input range's max and min values is specified.</p> <ul style="list-style-type: none"> • Constant Designate a set constant as the Min/Max value. (Direct Specification) • Address Designate the address where the Min/Max values are stored. (Indirect Specification) |
| | Input Sign | <p>Specifies whether input data will be able to handle negative numeric data.</p> <ul style="list-style-type: none"> • None Only positive numeric data. • 2's Complement Negative numbers are handled with 2's complement. • MSB Sign Negative numbers are handled with MSB sign. |
| Display Range | Display Specification | <p>Choose how the max and min values of the display range will be specified.</p> <ul style="list-style-type: none"> • Constant Designate a set constant as the Min/Max value. (Direct Specification) • Address Designate the address where the Min/Max values are stored. (Indirect Specification) |
| | Round Off | Select whether fractions get rounded off when data displays. |
| | Display Sign +/- | <p>Set to display negative numbers. This can be set when the [Data Type] is [Dec]. For example: When writing "-123"</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Sign +/-  Negative numbers displayed </div> <div style="text-align: center;"> <input type="checkbox"/> Sign +/-  Negative numbers not displayed </div> </div> |

Continued

| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|------------------------|---|-------------------|------------------|-------------------|--------------|------------------|---------------|--------|-----|------|------------|---------|------------|----------------|-------------------|---------|------------|--------|-------------------|----------|-----------------|---------|------------|--------|-------------------|-----|------|------------|---|--------------|----------------|-------------------|---|--------------|----------|-----------------|---|--------------|-----|------|------------|---|----------------|----------------|-------------------|---|----------------|----------|-----------------|---|----------------|-----|---|-----------|---|-----------|-----|------|------------|---|--------------|----------------|-------------------|---|--------------|----------|-----------------|---|--------------|
| Input Range/ Display Range | Min. Value/ Max. Value | <p>Select the input range and display range for the numeric display data. If [Input Specification] or [Display Specification] is [Constant], you can input a min/max value. If [Address] is set, specify the Word Address where the min/max value will be stored. The set up range varies depending on the [Data Type], [Input Sign], and [Display Sign +/-].</p> <table border="1"> <thead> <tr> <th>Bit Length</th> <th>Data Type</th> <th>Input Sign</th> <th>Input Range</th> <th>Display Sign +/-</th> <th>Display Range</th> </tr> </thead> <tbody> <tr> <td rowspan="12">16 Bit</td> <td rowspan="6">Dec</td> <td>None</td> <td>0 to 65535</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td rowspan="2">2's Complement</td> <td rowspan="2">-32,768 to 32,767</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td>Enable</td> <td>-32,768 to 32,767</td> </tr> <tr> <td rowspan="2">MSB Sign</td> <td rowspan="2">-32767 to 32767</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td>Enable</td> <td>-32,768 to 32,767</td> </tr> <tr> <td rowspan="3">Hex</td> <td>None</td> <td>0 to 65535</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>2's Complement</td> <td>-32,768 to 32,767</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>MSB Sign</td> <td>-32767 to 32767</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> <tr> <td rowspan="3">Oct</td> <td>None</td> <td>0 to 65535</td> <td>-</td> <td>0 to 177777(o)</td> </tr> <tr> <td>2's Complement</td> <td>-32,768 to 32,767</td> <td>-</td> <td>0 to 177777(o)</td> </tr> <tr> <td>MSB Sign</td> <td>-32767 to 32767</td> <td>-</td> <td>0 to 177777(o)</td> </tr> <tr> <td>BCD</td> <td>-</td> <td>0 to 9999</td> <td>-</td> <td>0 to 9999</td> </tr> <tr> <td rowspan="3">Bin</td> <td>None</td> <td>0 to 65535</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>2's Complement</td> <td>-32,768 to 32,767</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>MSB Sign</td> <td>-32767 to 32767</td> <td>-</td> <td>0 to FFFF(h)</td> </tr> </tbody> </table> | Bit Length | Data Type | Input Sign | Input Range | Display Sign +/- | Display Range | 16 Bit | Dec | None | 0 to 65535 | Disable | 0 to 65535 | 2's Complement | -32,768 to 32,767 | Disable | 0 to 65535 | Enable | -32,768 to 32,767 | MSB Sign | -32767 to 32767 | Disable | 0 to 65535 | Enable | -32,768 to 32,767 | Hex | None | 0 to 65535 | - | 0 to FFFF(h) | 2's Complement | -32,768 to 32,767 | - | 0 to FFFF(h) | MSB Sign | -32767 to 32767 | - | 0 to FFFF(h) | Oct | None | 0 to 65535 | - | 0 to 177777(o) | 2's Complement | -32,768 to 32,767 | - | 0 to 177777(o) | MSB Sign | -32767 to 32767 | - | 0 to 177777(o) | BCD | - | 0 to 9999 | - | 0 to 9999 | Bin | None | 0 to 65535 | - | 0 to FFFF(h) | 2's Complement | -32,768 to 32,767 | - | 0 to FFFF(h) | MSB Sign | -32767 to 32767 | - | 0 to FFFF(h) |
| Bit Length | Data Type | Input Sign | Input Range | Display Sign +/- | Display Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec | None | 0 to 65535 | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2's Complement | -32,768 to 32,767 | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Enable | -32,768 to 32,767 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | MSB Sign | -32767 to 32767 | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Enable | -32,768 to 32,767 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Hex | None | 0 to 65535 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2's Complement | | -32,768 to 32,767 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MSB Sign | | -32767 to 32767 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Oct | None | 0 to 65535 | - | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2's Complement | -32,768 to 32,767 | - | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | MSB Sign | -32767 to 32767 | - | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | - | 0 to 9999 | - | 0 to 9999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bin | None | 0 to 65535 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2's Complement | -32,768 to 32,767 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MSB Sign | -32767 to 32767 | - | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


Continued

| Setting | | Description | | | | | |
|----------------------------|------------------------|-------------|----------------|---|---------------------------|---|------------------|
| Input Range/ Display Range | Min. Value/ Max. Value | Bit Length | Data Type | Input Sign | Input Range | Display Sign +/- | Display Range |
| | | 32 bit | Dec | None | 0 to 4294967295 | Disable | 0 to 4294967295 |
| | | | | 2's Complement | -2147483648 to 2147483647 | Disable | 0 to 4294967295 |
| | | | | | Enable | -2147483648 to 2147483647 | |
| | | | MSB Sign | -2147483647 to 2147483647 | Disable | 0 to 4294967295 | |
| | | | | Enable | -2147483648 to 2147483647 | | |
| | | | | | Hex | None | 0 to 4294967295 |
| | | | 2's Complement | -2147483648 to 2147483647 | - | 0 to FFFFFFFF(h) | |
| | | | | MSB Sign | -2147483647 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | | | | BCD | - | 0 to 99999999 |
| | | Bin | None | 0 to 4294967295 | - | 0 to FFFFFFFF(h) | |
| | | | 2's Complement | -2147483648 to 2147483647 | - | 0 to FFFFFFFF(h) | |
| | | | | MSB Sign | -2147483647 to 2147483647 | - | 0 to FFFFFFFF(h) |
| | | Float | - | -9.9e ¹⁶ to 9.9e ¹⁶ | - | -9.9e ¹⁶ to 9.9e ¹⁶ | |

NOTE




- The Input Range and Display Range define how to convert values for display. If the value is outside the input range, the value is converted and displayed using the same ratio.

■ Data Entry/Basic



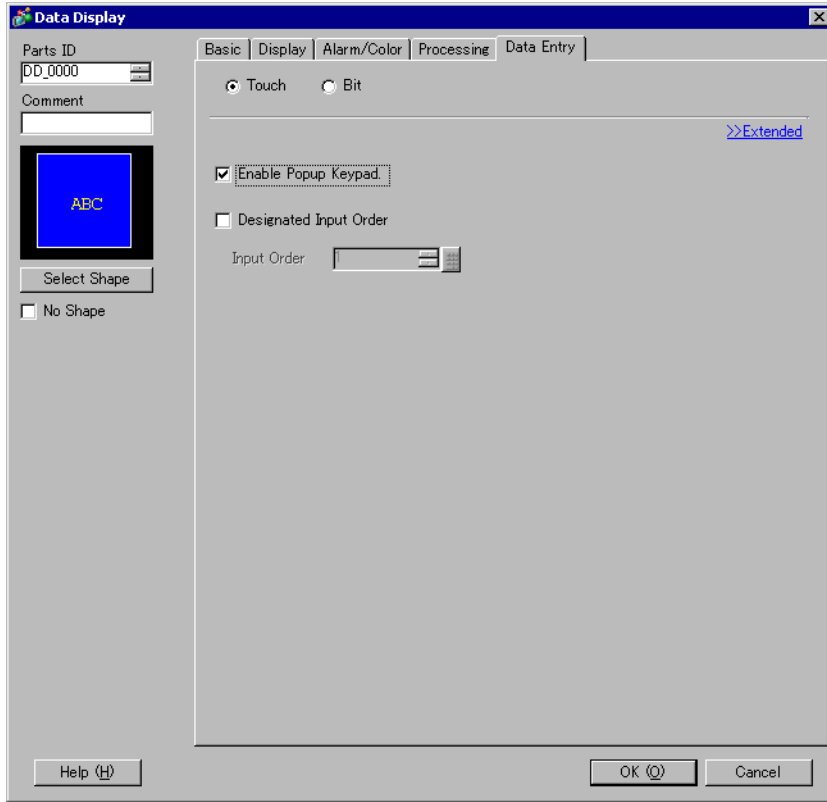


| Setting | Description |
|--------------------|--|
| Data Entry Methods | <p>Select the method that will change the Data Display to input state (cursor display state).</p> <ul style="list-style-type: none"> • Touch <p>When the Data Display is touched, it will change to the Allow Input state.</p> |


Continued
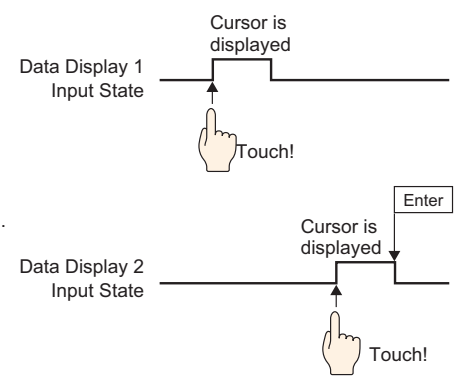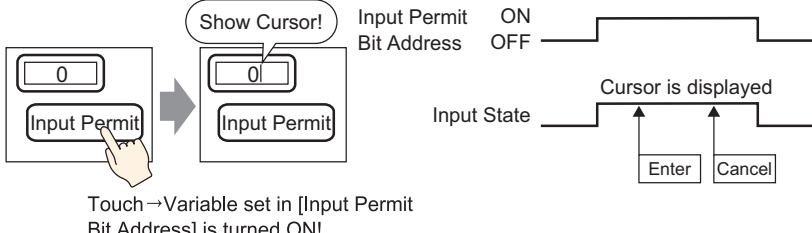
| Setting | Description |
|---------------------------|--|
| <p>Data Entry Methods</p> | <p>NOTE</p> <ul style="list-style-type: none"> If you touch a Data Display while inputting data into another Data Display, the input data will revert to its previous data, and the most recently touched part will enter the Allow Input state.  <p>Touch Data Display 1 and without deciding touch Data Display 2 and...</p> <ul style="list-style-type: none"> Bit When the Allow Input Bit Address is ON, the Data Display is in the Allow Input state.  <p>Touch → Variable set in [Input Permit Bit Address] is turned ON!</p> <p>NOTE</p> <ul style="list-style-type: none"> If the [Allow Input Bit Address] is turned OFF while inputting data in a Data Display, the Allow Input state is canceled, and the input data is erased. |
| <p>Touch</p> |  |


Continued
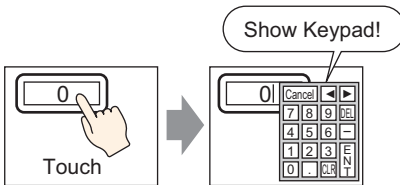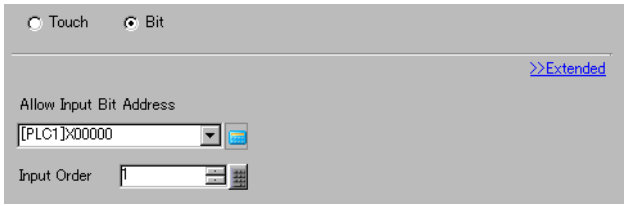
| Setting | | Description |
|---------|-------------------------|---|
| Touch | Enable Popup Keypad | <p>Select to display a pop-up keypad when you touch the Data Display part.</p>  <p>NOTE</p> <ul style="list-style-type: none"> A pop-up keypad cannot be used when the Data Display is placed on a Window screen. |
| | Designated Input Order | <p>When entering data into multiple Data Displays in sequence, select the order in which each display enters the input state.</p> <p> "14.13 How Data Input Order Works" (page 14-110)</p> |
| | Input Order | <p>Select the order, from 1 to 384, in which the Part will enter the input state.</p> |
| Bit | |  |
| | Allow Input Bit Address | <p>When the bit address set here turns ON, the Data Display enters the input state.</p> |

Continued


| Setting | | Description |
|---------|-------------|--|
| Bit | Input Order | <p>Select the order from 1 to 384 that the Part will enter the Allow Input state if multiple [Allow Input Bit Addresses] turn ON at the same time (when a bit address has been registered to multiple Data Display parts, or when different bit addresses turn ON at the same time).</p> <p>NOTE</p> <ul style="list-style-type: none"> • If more than one [Allow Input Bit Address] is turned ON at the same time, the Data Displays will enter the input state according to their [Input Order] settings. If the [Input Order] settings are the same, the input state order will be determined by the order the parts were placed. • If the [Allow Input Bit Address] of Data Displays placed on the Base Screen and Window Screen turn ON at the same time, the Base Screen will have a higher priority for the input state than the Window Screen. When placing Data Displays on both the Base and Window screen, make sure to set a different [Allow Input Bit Address]. <div style="text-align: center;">  <p>Multiple [Allow Input Bit Addresses] turn ON simultaneously</p> </div> |

■ Allow Input/Introduction

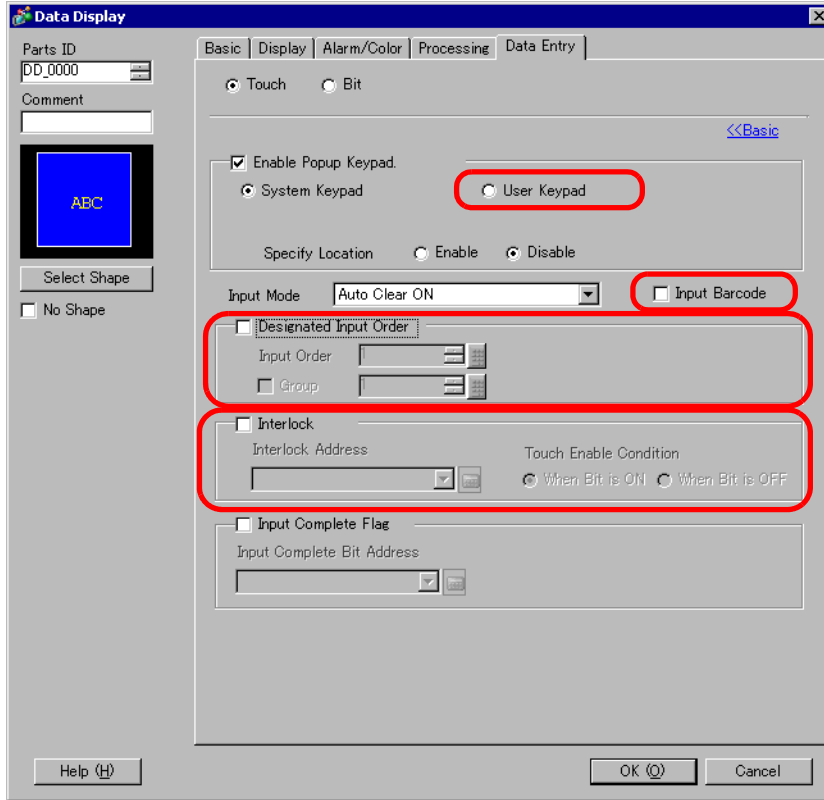


| Setting | | Description |
|---------|---------------------|---|
| Touch | Enable Popup Keypad | Select to display a pop-up keypad when you touch the Data Display part. NOTE <ul style="list-style-type: none"> A pop-up keypad cannot be used when the Data Display is placed on a Window screen. |
| | Keypad Type | <ul style="list-style-type: none"> System Keypad Use the standard keypad registration for GP-Pro EX. Use this in normal cases. User Keypad Create a user-defined keypad with the Keypad part. This keypad allows for customized input. <p>☞ “15.4.2 Setup Procedure ■ Displaying the Customized Keypad as Popup” (page 15-14)</p> |



Continued

| Setting | | Description | |
|---------|------------------------|---|--|
| Touch | System Keypad | <p>Display the prepared standard keypad registration in GP-Pro EX.</p>  <p>The input value displays when the user pushes the [Enter] key.</p> <p>NOTE</p> <ul style="list-style-type: none"> • When defining the alarm settings, the upper and lower limits are displayed as the input range. • When the Specify Input/Display Range check box is selected, even if no alarm is set up, the upper and lower limits are displayed as the input range. • When neither an Alarm Settings nor Specify Input/Display Range is used, the upper and lower limit values are defined by the Data Type and Total Display Digits in the Data Display. • When [Data Type] is [32 Bit Bin], the input range and alarm range does not display. • When [Data Type] is [32 Bit Float], and if Alarm Settings are not configured, the input range does not display. | |
| | User Keypad | Keypad | Set the number of the custom-made keypad. |
| | Specify Location | | <p>Select whether to set the pop-up keypad display position. If [Do] is selected, the pop-up keypad Display Area can be selected and moved after the Data Display part is positioned.</p> <p>NOTE</p> <ul style="list-style-type: none"> • When you group a Data Display with other parts, you cannot select or move the pop-up keypad display area. |
| | Designated Input Order | | <p>When entering data into multiple Data Displays in sequence, select the order in which each display enters the input state.</p> <p>☞ "14.13 How Data Input Order Works" (page 14-110)</p> |
| | Input Order | <p>Select the order, from 1 to 384, in which the Part will enter the input state.</p> | |
| | Group Number | <p>Divide the Data Displays into groups for continuous data input. The cursor will move in turn to each successive Data Display registered in the same group, according to the input order, setting them into the Allow Input state. The Group Number can be from 1 to 10.</p> <p>☞ "14.13.2 Set Input Order by Group" (page 14-111)</p> | |

Continued
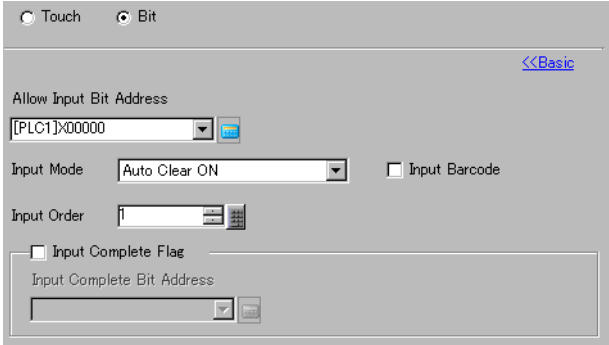
| Setting | | Description | | | | | | | | | | | |
|------------------------|--------------------------|--|------------------------|--------------------------|-------------------------|----------------|----|---------------|-----|----------------|-----------------|----|----------------|
| | Interlock | This feature blocks data inputs until the [Interlock Address] bit equals the [Touch Enable Condition]. Select the check box to use Interlock. ☞ “14.7 Preventing Operational Errors By Using Interlock” (page 14-24) | | | | | | | | | | | |
| | Interlock Address | Select the bit address that will designate the enable condition, to allow input to be entered. This address state will determine if touch is enabled or disabled. | | | | | | | | | | | |
| Touch | Touch Enable Condition | Select the condition that will enable the part to be touched, to allow input to be entered. | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Touch Enable Condition</th> <th>Interlock Address Status</th> <th>Touch Enabled/ Disabled</th> </tr> </thead> <tbody> <tr> <td rowspan="2">When Bit is ON</td> <td>ON</td> <td>Touch enabled</td> </tr> <tr> <td>OFF</td> <td>Touch disabled</td> </tr> <tr> <td rowspan="2">When Bit is OFF</td> <td>ON</td> <td>Touch disabled</td> </tr> <tr> <td>OFF</td> <td>Touch enabled</td> </tr> </tbody> </table> | Touch Enable Condition | Interlock Address Status | Touch Enabled/ Disabled | When Bit is ON | ON | Touch enabled | OFF | Touch disabled | When Bit is OFF | ON | Touch disabled |
| Touch Enable Condition | Interlock Address Status | Touch Enabled/ Disabled | | | | | | | | | | | |
| When Bit is ON | ON | Touch enabled | | | | | | | | | | | |
| | OFF | Touch disabled | | | | | | | | | | | |
| When Bit is OFF | ON | Touch disabled | | | | | | | | | | | |
| | OFF | Touch enabled | | | | | | | | | | | |
| | | <p>NOTE</p> <ul style="list-style-type: none"> When the Interlock [Touch Enable Condition] is disabled during input, the Data Display will remain in the Allow Input state. Interlock will not work until the input is completed. | | | | | | | | | | | |
| Bit | |  | | | | | | | | | | | |
| | Allow Input Bit Address | When the bit address set here turns ON, the Data Display enters the input state. | | | | | | | | | | | |

Continued

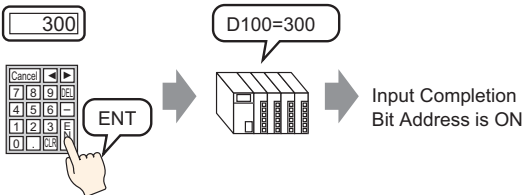
| Setting | | Description |
|---------------------|-------------|---|
| Bit | Input Order | <p>Select the order from 1 to 384 that the Part will enter the Allow Input state if multiple [Allow Input Bit Addresses] turn ON at the same time (when a bit address has been registered to multiple Data Display parts, or when different bit addresses turn ON at the same time).</p> <p>NOTE</p> <ul style="list-style-type: none"> • If more than one [Allow Input Bit Address] is turned ON at the same time, the Data Displays will enter the input state according to their [Input Order] settings. If the [Input Order] settings are the same, the input state order will be determined by the order the parts were placed. • If the [Allow Input Bit Address] of Data Displays placed on the Base Screen and Window Screen turn ON at the same time, the Base Screen will have a higher priority for the input state than the Window Screen. When placing Data Displays on both the Base and Window screen, make sure to set a different [Allow Input Bit Address].  <p>Multiple [Allow Input Bit Addresses] turn ON simultaneously</p> |
| Input Mode | | <ul style="list-style-type: none"> • Auto Clear OFF New data will build on previously input data. Pressing [CLR] on the keypad clears the value. • Auto Clear ON The first key pressed (except [ENT], [DEL], or [BS]) will clear the previously input data. • Auto Clear ON + Input Check When using barcode input, checks whether the number of input digits coincides with the [Total Display Digits] when an automatic clear occurs. If they do not coincide, the data will not be written to the Word Address. |
| Input Barcode | | <p>A setting that allows input from a barcode reader.</p> <p>☞ “16.2.2 Setup Procedure” (page 16-5)</p> |
| Input Complete Flag | | <p>Detects and notifies you when input has been completed.</p>  |

Continued

| Setting | Description |
|---------------------------------|---|
| Input Complete Flag Bit Address | <p>Sets the bit address that will turn ON when input has been completed.</p> <p>NOTE</p> <ul style="list-style-type: none"> • Please return this bit to OFF after input has been completed. |

■ Display/Basic

Sets the font and attributes of the Numeric Display.

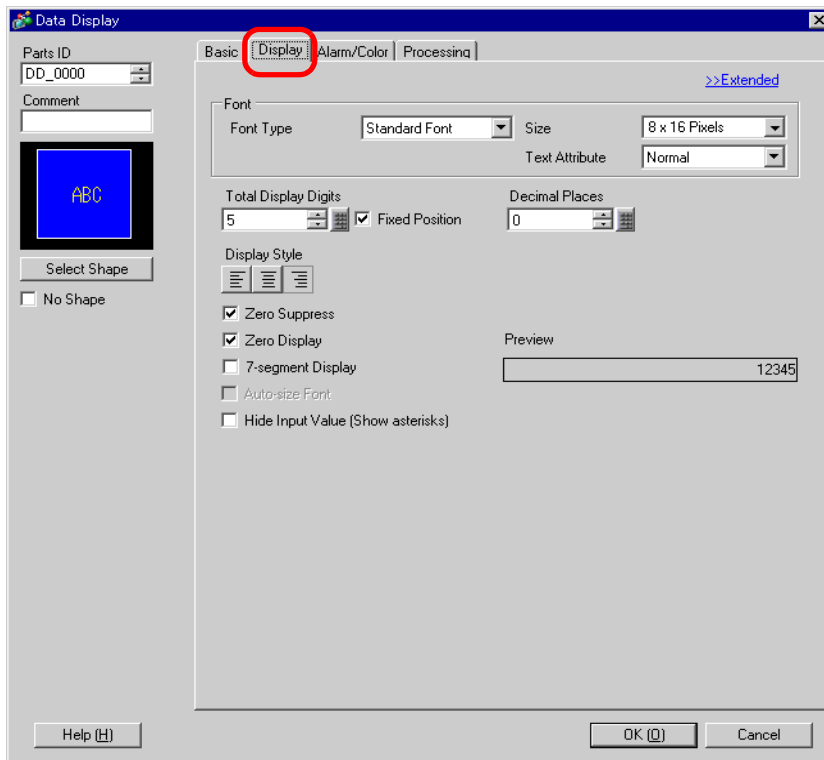

| Setting | Description |
|-----------|--|
| Font | Sets a font for the numeric values. |
| Font Type | Select a font type for the numeric values from [Standard Font] or [Stroke Font]. |


Continued

| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----------------|---|-------------|-----------|----------------------|----------------|---------------|--|--------|-----|---------|---------|-----|---------|---|-----|---------|---|-----|---------|---|-----|---------|---|--------|-----|---------|---------|-----|---------|---|-----|---------|---|-----|---------|---|-------|---------|---------|
| | Size | <p>Chooses a font size for the numeric values.</p> <p>Standard Font: (8 to 64) x (8 to 128)</p> <p>Standard Font (Fixed Size): [6x10], [8x13], [13x23]</p> <p>(Displays single-byte characters only)</p> <p>Stroke Font: Select from 6 to 127.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Text Attribute | <p>Select the text attributes.</p> <p>Standard Font: Choose from [Standard], [Bold], [Shadow]</p> <p>(When using a fixed font size [6 x 10], select from [Standard] or [Shadow].)</p> <p>Stroke Font: Choose from [Standard], [Bold], [Outline]</p> <p>NOTE</p> <ul style="list-style-type: none"> When using [Auto-size Font] with either [7-segment Display] or [Stroke Font], the [Text Attribute] cannot be defined. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total Display Digits Decimal Places | | <p>Select the number of digits to display in the numeric display with [Total Display Digits]. Numbers after the decimal point are included in the display digits. However, the decimal point is not included in the display digits.</p> <p>When using [Dec] or [Float] data types, use the [Decimal Places] field to define the number of digits to display after the decimal point.</p> <p>For example:</p> <p>When the Total Display Digits is 5, and the Number of Decimal Places is 2, it will look as follows:</p> <div style="text-align: center; border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;">123.45</div> <p>Each digit number range is different, depending on the [Data Type].</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Data Length</th> <th rowspan="2">Data Type</th> <th>Total Display Digits</th> <th>Decimal Places</th> </tr> <tr> <th colspan="2">Setting Range</th> </tr> </thead> <tbody> <tr> <td rowspan="5">16 Bit</td> <td>Dec</td> <td>1 to 11</td> <td>0 to 10</td> </tr> <tr> <td>Hex</td> <td>1 to 11</td> <td>—</td> </tr> <tr> <td>BCD</td> <td>1 to 11</td> <td>—</td> </tr> <tr> <td>Oct</td> <td>1 to 11</td> <td>—</td> </tr> <tr> <td>Bin</td> <td>1 to 16</td> <td>—</td> </tr> <tr> <td rowspan="5">32 bit</td> <td>Dec</td> <td>1 to 11</td> <td>0 to 10</td> </tr> <tr> <td>Hex</td> <td>1 to 11</td> <td>—</td> </tr> <tr> <td>BCD</td> <td>1 to 11</td> <td>—</td> </tr> <tr> <td>Bin</td> <td>1 to 32</td> <td>—</td> </tr> <tr> <td>Float</td> <td>1 to 17</td> <td>0 to 16</td> </tr> </tbody> </table> | Data Length | Data Type | Total Display Digits | Decimal Places | Setting Range | | 16 Bit | Dec | 1 to 11 | 0 to 10 | Hex | 1 to 11 | — | BCD | 1 to 11 | — | Oct | 1 to 11 | — | Bin | 1 to 16 | — | 32 bit | Dec | 1 to 11 | 0 to 10 | Hex | 1 to 11 | — | BCD | 1 to 11 | — | Bin | 1 to 32 | — | Float | 1 to 17 | 0 to 16 |
| Data Length | Data Type | Total Display Digits | | | Decimal Places | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Setting Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec | 1 to 11 | 0 to 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Oct | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | 1 to 16 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 bit | Dec | 1 to 11 | 0 to 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | 1 to 32 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Float | 1 to 17 | 0 to 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fixed Position | | Select this option to display the numeric value in the center of the part. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | Description |
|-----------------------------------|---|
| Display Style | Select the alignment of the numeric display area's numeric value: [Align Right], [Align Left], or [Align Center]. |
| Zero Suppress | <p>If this option is selected, leading zeros are not displayed.</p> <p>For example, When Total Display Digits = 4</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Zero Suppress <input type="text" value="25"/> </div> <div style="text-align: center;"> <input type="checkbox"/> Zero Suppress <input type="text" value="0025"/> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>Leading zeroes are not displayed</p> </div> <div style="text-align: center;"> <p>Zeroes are added to correspond to the length of Display Digits</p> </div> </div> |
| Zero Display | Displays "0" when the data is zero. |
| 7-segment Display | <p>Select this option to show values as a 7-segment display.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option is not available when a [Fixed Size] is selected in the font [Size] list. • This cannot be set if the [Display Format] option is set on the [Basic] tab's [Details] screen. |
| Auto-size Font | <p>For use with the Stroke Font, select this option to display the value without the top and bottom margins.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option is unavailable when the [7-segment Display] check box is selected. |
| Hide Input Value (Show asterisks) | <p>This option hides input values by displaying asterisks instead of the input value. This feature is useful when entering passwords or other types of inputs that require increased security.</p> <p>NOTE</p> <ul style="list-style-type: none"> • You cannot use Hide Input Value (Show asterisks) with the [7-segment Display]. |
| Preview | Displays the data image according to the settings. |

■ Display Settings/Basic

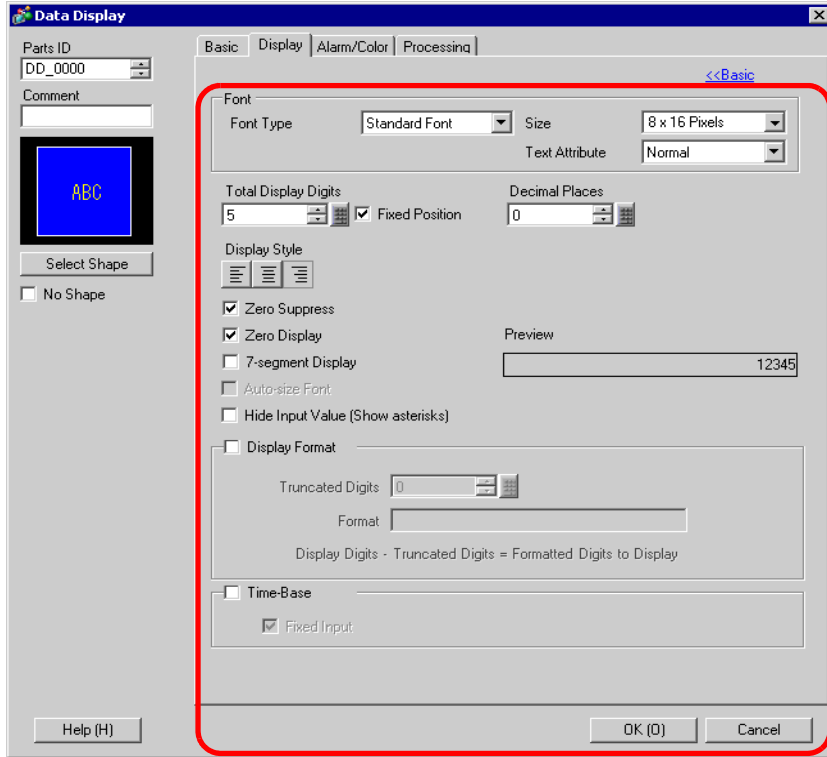

| Setting | Description |
|----------------|--|
| Font | Sets a font for the numeric values. |
| Font Type | Select a font type for the numeric values from [Standard Font] or [Stroke Font]. |
| Size | Chooses a font size for the numeric values. Standard Font: (8 to 64) x (8 to 128) Standard Font (Fixed Size): [6 x 10], [8 x 13], [13 x 23] (Displays single-byte characters only) Stroke Font: 6 to 127 |
| Text Attribute | Select the text attributes. Standard Font: Choose from [Standard], [Bold], [Shadow] (When using a fixed font size [6 x 10], select from [Standard] or [Shadow].) Stroke Font: Choose from [Standard], [Bold], [Outline] |
| | <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> When using [Auto-size Font] with either [7-segment Display] or [Stroke Font], the [Text Attribute] cannot be defined. |

Continued

| Setting | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---------------|-----------|----------------------|----------------|---------------|--|--------|-----|---------|---------|-----|---------|---|-----|---------|---|-----|---------|---|-----|---------|---|--------|-----|---------|---------|-----|---------|---|-----|---------|---|-----|---------|---|-------|---------|---------|
| Total Display Digits Decimal Places | <p>Select the number of digits to display in the numeric display with [Total Display Digits]. Numbers after the decimal point are included in the display digits. However, the decimal point is not included in the display digits.</p> <p>When using [Dec] or [Float] data types, use the [Decimal Places] field to define the number of digits to display after the decimal point.</p> <p>For example:</p> <p>When the Total Display Digits is 5, and the Number of Decimal Places is 2, it will look as follows:</p> <div style="text-align: center; border: 1px solid black; padding: 2px; width: fit-content; margin: 0 auto;">123.45</div> <p>Each digit number range is different, depending on the [Data Type].</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th data-bbox="397 629 570 755" rowspan="2">Data Length</th> <th data-bbox="570 629 743 755" rowspan="2">Data Type</th> <th data-bbox="743 629 916 703">Total Display Digits</th> <th data-bbox="916 629 1089 703">Decimal Places</th> </tr> <tr> <th colspan="2" data-bbox="743 703 1089 755">Setting Range</th> </tr> </thead> <tbody> <tr> <td data-bbox="397 755 570 1010" rowspan="5">16 Bit</td> <td data-bbox="570 755 743 807">Dec</td> <td data-bbox="743 755 916 807">1 to 11</td> <td data-bbox="916 755 1089 807">0 to 10</td> </tr> <tr> <td data-bbox="570 807 743 859">Hex</td> <td data-bbox="743 807 916 859">1 to 11</td> <td data-bbox="916 807 1089 859">—</td> </tr> <tr> <td data-bbox="570 859 743 911">BCD</td> <td data-bbox="743 859 916 911">1 to 11</td> <td data-bbox="916 859 1089 911">—</td> </tr> <tr> <td data-bbox="570 911 743 964">Oct</td> <td data-bbox="743 911 916 964">1 to 11</td> <td data-bbox="916 911 1089 964">—</td> </tr> <tr> <td data-bbox="570 964 743 1010">Bin</td> <td data-bbox="743 964 916 1010">1 to 16</td> <td data-bbox="916 964 1089 1010">—</td> </tr> <tr> <td data-bbox="397 1010 570 1265" rowspan="5">32 bit</td> <td data-bbox="570 1010 743 1062">Dec</td> <td data-bbox="743 1010 916 1062">1 to 11</td> <td data-bbox="916 1010 1089 1062">0 to 10</td> </tr> <tr> <td data-bbox="570 1062 743 1114">Hex</td> <td data-bbox="743 1062 916 1114">1 to 11</td> <td data-bbox="916 1062 1089 1114">—</td> </tr> <tr> <td data-bbox="570 1114 743 1166">BCD</td> <td data-bbox="743 1114 916 1166">1 to 11</td> <td data-bbox="916 1114 1089 1166">—</td> </tr> <tr> <td data-bbox="570 1166 743 1219">Bin</td> <td data-bbox="743 1166 916 1219">1 to 32</td> <td data-bbox="916 1166 1089 1219">—</td> </tr> <tr> <td data-bbox="570 1219 743 1265">Float</td> <td data-bbox="743 1219 916 1265">1 to 17</td> <td data-bbox="916 1219 1089 1265">0 to 16</td> </tr> </tbody> </table> | Data Length | Data Type | Total Display Digits | Decimal Places | Setting Range | | 16 Bit | Dec | 1 to 11 | 0 to 10 | Hex | 1 to 11 | — | BCD | 1 to 11 | — | Oct | 1 to 11 | — | Bin | 1 to 16 | — | 32 bit | Dec | 1 to 11 | 0 to 10 | Hex | 1 to 11 | — | BCD | 1 to 11 | — | Bin | 1 to 32 | — | Float | 1 to 17 | 0 to 16 |
| Data Length | Data Type | | | Total Display Digits | Decimal Places | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Setting Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec | 1 to 11 | 0 to 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Oct | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | 1 to 16 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 bit | Dec | 1 to 11 | 0 to 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | 1 to 11 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | 1 to 32 | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Float | 1 to 17 | 0 to 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fixed Position | Select this option to display the numeric value in the center of the part. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Display Style | Select the alignment of the numeric display area's numeric value: [Align Right], [Align Left], or [Align Center]. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Zero Suppress | <p>If this option is selected, leading zeros are not displayed.</p> <p>For example, When Total Display Digits = 4</p> <div style="display: flex; justify-content: space-around; align-items: center; margin: 10px 0;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Zero Suppress <div style="border: 1px solid black; padding: 2px 10px; margin-left: 5px;">25</div> </div> <div style="text-align: center;"> <input type="checkbox"/> Zero Suppress <div style="border: 1px solid black; padding: 2px 10px; margin-left: 5px;">0025</div> </div> </div> <div style="display: flex; justify-content: space-around; font-size: small;"> <div style="text-align: center;"> <p>Leading zeroes are not displayed</p> </div> <div style="text-align: center;"> <p>Zeroes are added to correspond to the length of Display Digits</p> </div> </div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Zero Display | Displays "0" when the data is zero. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | Description |
|-----------------------------------|--|
| 7-segment Display | <p>Select this option to show values as a 7-segment display.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option is not available when a [Fixed Size] is selected in the font [Size] list. • This cannot be set if the [Display Format] option is set on the [Basic] tab's [Details] screen. |
| Auto-size Font | <p>For use with the Stroke Font, select this option to display the value without the top and bottom margins.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option is unavailable when the [7-segment Display] check box is selected. |
| Hide Input Value (Show asterisks) | <p>Set whether Input Values will be indicated by asterisks.</p> <p>NOTE</p> <ul style="list-style-type: none"> • You cannot use Hide Input Value (Show asterisks) with the [7-segment Display]. |
| Preview | <p>Displays the data image according to the settings.</p> |
| Display Format | <p>Select whether to use a Display Format.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option cannot be selected when, in the [Basic] tab, [Allow Input] is selected. • This option cannot be set when [Data Type] is [Bin] on the [Basic] tab. |
| Truncated Digits | <p>Designate how many numeric data digits to truncate (0 to 10). This can only be set when the [Data Type] is [Dec] or [BCD] on the [Basic] tab. When there are no digits to truncate, a value of zero is set.</p> |

Continued

| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--|---|---|---|---|---|---|---|---|--|--|--|--|--|---|---|---|---|---|---|---|---|---|---|---|
| Display Format | Format | <p>Set the Display Format. The portion which will display data is input with an asterisk "*". Together with the format character portion, it must not exceed 80 characters. The numeric value displays in the asterisks "*" from the lowest position.</p> <p>Select the settings so that the Total Display Digits - Truncated digits = No of "*".</p> <p>For example: [Total Display Digits] = 6, [Truncated Digits] = 2, [Display Style] = Align Right [Zero Suppress] = OFF, [Format] = ***Kg *00g</p> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>Display Data</p> <table border="1" style="border-collapse: collapse; width: 100px;"> <tr><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px; text-align: center;">1</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">3</td><td style="width: 20px; height: 20px; text-align: center;">4</td><td style="width: 20px; height: 20px; text-align: center;">5</td><td style="width: 20px; height: 20px; text-align: center;">6</td></tr> </table> </div> <div style="text-align: center;"> <p>Display.</p> <p>→ 123Kg400g</p> </div> <div style="text-align: right; margin-right: 50px;"> <p>Format text portion</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start; margin-top: 10px;"> <div style="text-align: center;"> <table border="1" style="border-collapse: collapse; width: 100px;"> <tr><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px;"></td><td style="width: 20px; height: 20px; text-align: center;">1</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">3</td></tr> </table> </div> <div style="text-align: center;"> <p>→ 000Kg100g</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start; margin-top: 10px;"> <div style="text-align: center;"> <table border="1" style="border-collapse: collapse; width: 100px;"> <tr><td style="width: 20px; height: 20px; text-align: center;">1</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">3</td><td style="width: 20px; height: 20px; text-align: center;">4</td><td style="width: 20px; height: 20px; text-align: center;">5</td><td style="width: 20px; height: 20px; text-align: center;">6</td><td style="width: 20px; height: 20px; text-align: center;">7</td><td style="width: 20px; height: 20px; text-align: center;">8</td></tr> </table> </div> <div style="text-align: center;"> <p>→ 345Kg600g</p> </div> </div> | | | 1 | 2 | 3 | 4 | 5 | 6 | | | | | | 1 | 2 | 3 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| | | | 1 | 2 | 3 | 4 | 5 | 6 | | | | | | | | | | | | | | | | | | |
| | | | | | 1 | 2 | 3 | | | | | | | | | | | | | | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | | | | | | | | | | | | | | | | |
| Digits - Truncated digits = Data Display Length | Displays the calculation method which computes the number of asterisks "*" in the Display Format. | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|-------|-------|---|------|-------|-------|------|----------|-----|-------|----|-------|-----|----|----|------|-----|---|----|----|-----|---|----|-----|-----|---|-----------------|-----|-----|---|---|---|---|---|---|---|---|---|---|---|
| Time-Base | <p>Defines whether to use the Time-Base Function.</p> <p>This works only when the following devices are selected:</p> <ul style="list-style-type: none"> • Siemens AG: SIMATIC S7 3964(R)/RK512 • Siemens AG: SIMATIC S7 MPI direct • Siemens AG: SIMATIC S7 Ethernet • PROFIBUS International: PROFIBUS DP slave <p>If the [Time-Base] check box is selected, data displays in the following formats.</p> <p>Word Address</p> <div style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="width: 25%; text-align: center;">15</td> <td style="width: 25%; text-align: center;">12 11</td> <td style="width: 25%; text-align: center;">0</td> </tr> <tr> <td style="text-align: center;">MODE</td> <td style="text-align: center;">Value</td> <td style="text-align: center;">Value</td> </tr> </table> <p style="text-align: right; margin-right: 10px;">s</p> </div> <p>Using the defined Word Address, the four most-significant bits specify the decimal point. Each four bit that follows specifies a number for up to three positions to the right of the decimal point.</p> <p>Displays the 4-digit value (including decimal points, spaces, and 0s) + "s" (5th digit).</p> <p style="text-align: right;">When entering values other than 0h to 09h, displays as follows.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Mode</th> <th style="width: 25%;">Display.</th> <th style="width: 25%;">0Ah</th> <th style="width: 25%;">Space</th> </tr> </thead> <tbody> <tr> <td>0h</td> <td>0.01s</td> <td>0Bh</td> <td>:F</td> </tr> <tr> <td>1h</td> <td>0.1s</td> <td>0Ch</td> <td>e</td> </tr> <tr> <td>2h</td> <td>1s</td> <td>0Dh</td> <td>.</td> </tr> <tr> <td>3h</td> <td>10s</td> <td>0Eh</td> <td>+</td> </tr> <tr> <td>Other than 0-3h</td> <td>10s</td> <td>0Fh</td> <td>-</td> </tr> </tbody> </table> <p>Example: When Value 1=1, Value 2=2, and Value 3=3</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <table border="1" style="border-style: dashed; border-collapse: collapse;"> <tr> <td style="padding: 2px;">1</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;">3</td> <td style="padding: 2px;">s</td> </tr> </table> <p>Mode:1</p> </div> <div style="text-align: center;"> <table border="1" style="border-style: dashed; border-collapse: collapse;"> <tr> <td style="padding: 2px;">1</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">3</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;">s</td> </tr> </table> <p>Mode:2</p> </div> </div> | 15 | 12 11 | 0 | MODE | Value | Value | Mode | Display. | 0Ah | Space | 0h | 0.01s | 0Bh | :F | 1h | 0.1s | 0Ch | e | 2h | 1s | 0Dh | . | 3h | 10s | 0Eh | + | Other than 0-3h | 10s | 0Fh | - | 1 | 2 | . | 3 | s | 1 | 2 | 3 | . | s |
| 15 | 12 11 | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MODE | Value | Value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mode | Display. | 0Ah | Space | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0h | 0.01s | 0Bh | :F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1h | 0.1s | 0Ch | e | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2h | 1s | 0Dh | . | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3h | 10s | 0Eh | + | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Other than 0-3h | 10s | 0Fh | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2 | . | 3 | s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2 | 3 | . | s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued


| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------------------------------|--|-----------------------------|-------------------------------------|--|--|--|------------------|-----------------|-----------------------------|------------------------------|---|-------|-------|-------|-------|---|-------|-------|-------|--------|-----|-------|-------|--------------------|--------------------|------|-------|---------------------|--------------------|--------------------|----|---------------------|-------|-------|-------|------|---------------------|-------|--------------------|--------------------|-----|---------------------|---------------------|
| Time-Base | Fixed Input | <p>Specify if the decimal position is fixed when inputting values.</p> <ul style="list-style-type: none"> When enabled: <p>Decimal point is fixed. When you input a decimal point, you can move the cursor before or after the decimal point. You can also move the cursor by pressing the "←" or "→" keys.</p> <p>For example:</p> <p style="text-align: center;"> Input "2" Input "." Input "3" Input "2" Input "." 1 . 23s → 2 . 23s → 2 . 23s → 2 . 33s → 2 . 32s → 2 . 32s ↑ Cursor </p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Input Value</th> <th colspan="4">Value displayed in the Data Display</th> </tr> <tr> <th>Mode0 (0.01s)</th> <th>Mode1 (0.1s)</th> <th>Mode2 (1s)^{*1}</th> <th>Mode3 (10s)^{*1}</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.00s</td> <td>_0.0s</td> <td>__0_s</td> <td>___0s</td> </tr> <tr> <td>2</td> <td>2.00s</td> <td>_2.0s</td> <td>__2_s</td> <td>___20s</td> </tr> <tr> <td>1.2</td> <td>1.20s</td> <td>_1.2s</td> <td>Input Not Possible</td> <td>Input Not Possible</td> </tr> <tr> <td>1.23</td> <td>1.23s</td> <td>_1.3s^{*2}</td> <td>Input Not Possible</td> <td>Input Not Possible</td> </tr> <tr> <td>12</td> <td>2.00s^{*3}</td> <td>12.0s</td> <td>_12_s</td> <td>_120s</td> </tr> <tr> <td>12.3</td> <td>2.30s^{*4}</td> <td>12.3s</td> <td>Input Not Possible</td> <td>Input Not Possible</td> </tr> <tr> <td>123</td> <td>3.00s^{*5}</td> <td>23.0s^{*4}</td> <td>123_s</td> <td>1230s</td> </tr> </tbody> </table> <p>*1 Mode 2 and 3 do not allow decimal input.</p> <p>*2 Because the number of decimal digits is 1, the first decimal value entered (2) is overwritten.</p> <p>*3 Because the number of integral digits is 1, the first entered value (1) is overwritten.</p> <p>*4 Because the cursor does not move to a decimal position until a decimal point is input, the input (1) is ignored.</p> <p>*5 Because the cursor does not move to a decimal position until a decimal point is input, the inputs ("1" and "2") are ignored.</p> | Input Value | Value displayed in the Data Display | | | | Mode0 (0.01s) | Mode1 (0.1s) | Mode2 (1s) ^{*1} | Mode3 (10s) ^{*1} | 0 | 0.00s | _0.0s | __0_s | ___0s | 2 | 2.00s | _2.0s | __2_s | ___20s | 1.2 | 1.20s | _1.2s | Input Not Possible | Input Not Possible | 1.23 | 1.23s | _1.3s ^{*2} | Input Not Possible | Input Not Possible | 12 | 2.00s ^{*3} | 12.0s | _12_s | _120s | 12.3 | 2.30s ^{*4} | 12.3s | Input Not Possible | Input Not Possible | 123 | 3.00s ^{*5} | 23.0s ^{*4} |
| Input Value | Value displayed in the Data Display | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Mode0 (0.01s) | Mode1 (0.1s) | Mode2 (1s) ^{*1} | Mode3 (10s) ^{*1} | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0.00s | _0.0s | __0_s | ___0s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 2.00s | _2.0s | __2_s | ___20s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 1.20s | _1.2s | Input Not Possible | Input Not Possible | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.23 | 1.23s | _1.3s ^{*2} | Input Not Possible | Input Not Possible | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 2.00s ^{*3} | 12.0s | _12_s | _120s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.3 | 2.30s ^{*4} | 12.3s | Input Not Possible | Input Not Possible | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 123 | 3.00s ^{*5} | 23.0s ^{*4} | 123_s | 1230s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------|--|-------------|------------------|------|---|-------|---|-----|-------|---|---|-------|---|-----|-------|---|------|-------|---|----|-------|---|------|-------|---|-----|-------|---|------|-------|---|------|--------------------|---|
| Time-Base | Fixed Input | <ul style="list-style-type: none"> When disabled: Inputs a 4-digit value, which includes the decimal point. This type of input enables higher precision of display values. When the Data Display accepts inputs, the cursor position starts in the far right position. <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Input Value</th> <th>Value to display</th> <th>Mode</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.00s</td> <td>0</td> </tr> <tr> <td>0.0</td> <td>0.00s</td> <td>0</td> </tr> <tr> <td>1</td> <td>1.00s</td> <td>0</td> </tr> <tr> <td>1.2</td> <td>1.20s</td> <td>0</td> </tr> <tr> <td>1.23</td> <td>1.23s</td> <td>0</td> </tr> <tr> <td>12</td> <td>12.0s</td> <td>1</td> </tr> <tr> <td>12.3</td> <td>12.3s</td> <td>1</td> </tr> <tr> <td>123</td> <td>123_s</td> <td>2</td> </tr> <tr> <td>1230</td> <td>1230s</td> <td>3</td> </tr> <tr> <td>1234</td> <td>Input Not Possible</td> <td>-</td> </tr> </tbody> </table> | Input Value | Value to display | Mode | 0 | 0.00s | 0 | 0.0 | 0.00s | 0 | 1 | 1.00s | 0 | 1.2 | 1.20s | 0 | 1.23 | 1.23s | 0 | 12 | 12.0s | 1 | 12.3 | 12.3s | 1 | 123 | 123_s | 2 | 1230 | 1230s | 3 | 1234 | Input Not Possible | - |
| Input Value | Value to display | Mode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0.00s | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.0 | 0.00s | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1.00s | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 1.20s | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.23 | 1.23s | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 12.0s | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.3 | 12.3s | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 123 | 123_s | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1230 | 1230s | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1234 | Input Not Possible | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


■ Alarm/Color/Basic

Settings for the Numeric Display's color and numeric data.

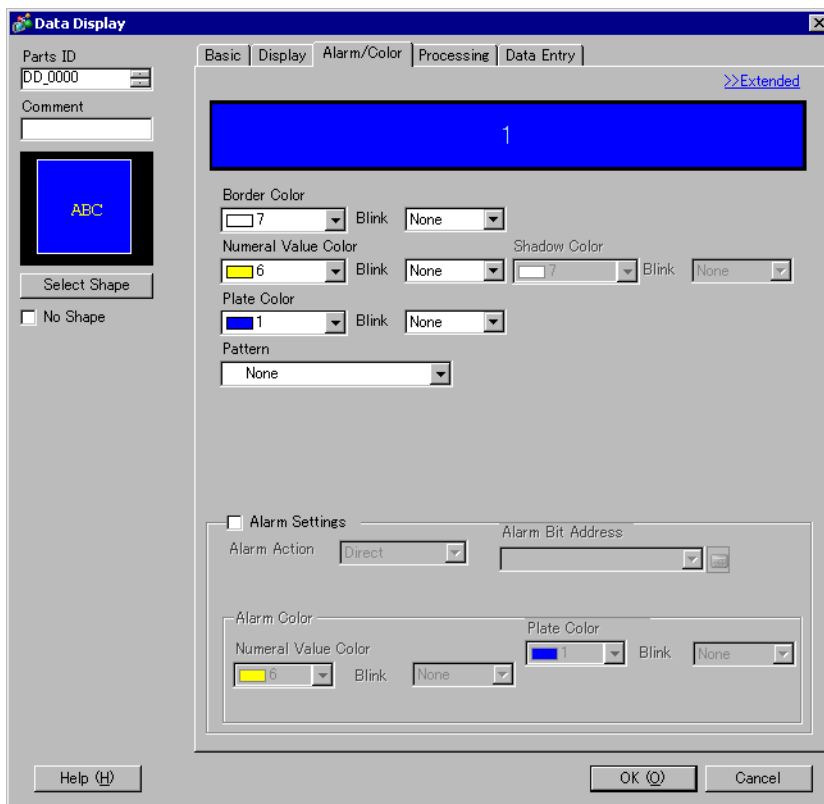


| Setting | Description |
|---------------------|---|
| Border Color | Select the border color for the Numeric Display. |
| Numeral Value Color | Set the color for the Numeric Display's numeric data. |
| Shadow Color | Set the background color for the Numeric Display's numeric value. NOTE • This can only be set when [Shadow] is set on the [Text Attribute] in the [Display] tab's [Font]. |
| Plate Color | Set a background color for the Numeric Display part. |
| Pattern | Set a background pattern for the Numeric Display. |
| Pattern Color | Set a pattern color for the Numeric Display. |
| Blink | You can choose different blink settings for the [Border Color], [Numeral Value Color], [Shadow Color], [Plate Color], and [Pattern Color]. NOTE • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. ☞ "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42) |

Continued
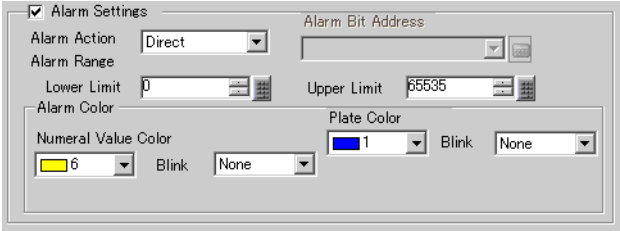
| Setting | Description | | | | | | | | |
|-----------------------------|---|----------------------|--------------|----|-------------|----|-------------|---|--|
| Indirect Area Specification | <p>If the [Alarm]'s [Alarm Action] is [Address], choose the designation method for the Word Addresses which will store the alarm's upper/lower limit value.</p> <ul style="list-style-type: none"> • Area After Display Address In the [Basic] tab, the Min and Max input range values are stored in consecutive addresses that follow the [Monitor Word Address]. <table border="1" data-bbox="632 397 1096 523" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">Monitor Word Address</td> <td>Display Data</td> </tr> <tr> <td style="padding-right: 10px;">+1</td> <td>Lower Limit</td> </tr> <tr> <td style="padding-right: 10px;">+2</td> <td>Upper Limit</td> </tr> <tr> <td style="padding-right: 10px;">:</td> <td></td> </tr> </table> <p>For example: When [Monitor Word Address] is "D100" The Lower Limit will be "D101", and the Upper Limit will be "D102".</p> <ul style="list-style-type: none"> • Individual Settings Individually define a word address for the [Lower Limit] and a word address for the [Upper Limit]. | Monitor Word Address | Display Data | +1 | Lower Limit | +2 | Upper Limit | : | |
| Monitor Word Address | Display Data | | | | | | | | |
| +1 | Lower Limit | | | | | | | | |
| +2 | Upper Limit | | | | | | | | |
| : | | | | | | | | | |
| Alarm Settings | <p>The color can be set to change when the value goes outside of a specified range. Select whether to designate [Alarm].</p>  <p>NOTE</p> <ul style="list-style-type: none"> • The alarm settings can only be set when the number of ranges is one. When the number of ranges is one, the contents of the Basic screen will also be displayed on the Detail screen. • On the [Basic] tab, when you select [Allow Input], you cannot input a value outside the warning range. | | | | | | | | |
| Alarm Action | <p>Choose the Alarm Action.</p> <ul style="list-style-type: none"> • Direct Write a set constant as the Alarm' upper/lower limit value. • Address Designate the address where the Upper/Lower Limit values are stored. • Change Color When the [Alarm Bit Address] turns ON, the color changes and an alarm displays. | | | | | | | | |
| Alarm Bit Address | <p>When the [Alarm Action] is [Change Color], input the bit address which will act as a trigger for the color change. When this bit turns ON, the color change will occur.</p> | | | | | | | | |


Continued

| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|--|-------------|--|---------------------------|----------------------|-----|--------|---------|------------|--------|-------------------|--|--------|---------|-----------------|--------|---------------------------|-----|--------|--|--|--------|-----|--------|-----------|--|--------|---------------|--|-----|--------|--------------|--|--------|------------------|--|-----|-------------|----------------|--|-------|-------------|---|--|
| Alarm | Alarm Range Upper Limit/ Lower Limit | <p>If [Alarm Action] is [Direct], you can set an upper/lower limit value for the alarm range.</p> <p>If [Alarm Action] is [Address] and [Individual Settings] is selected, specify the Word Address where the upper/lower limit value will be stored.</p> <p>Each [Data Type] and [Sign +/-] has a different setup range.</p> <table border="1"> <thead> <tr> <th>Data Type</th> <th>Data Length</th> <th>Sign +/-</th> <th>Alarm Range Settings</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Dec</td> <td rowspan="2">16 Bit</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td>Enable</td> <td>-32,768 to 32,767</td> </tr> <tr> <td rowspan="2"></td> <td rowspan="2">32 bit</td> <td>Disable</td> <td>0 to 4294967295</td> </tr> <tr> <td>Enable</td> <td>-2147483648 to 2147483647</td> </tr> <tr> <td rowspan="2">Bin</td> <td>16 Bit</td> <td colspan="2" rowspan="2">0000..0000(16 bit) to 1111..1111(16 bit)</td> </tr> <tr> <td>32 bit</td> </tr> <tr> <td rowspan="2">BCD</td> <td>16 Bit</td> <td colspan="2">0 to 9999</td> </tr> <tr> <td>32 bit</td> <td colspan="2">0 to 99999999</td> </tr> <tr> <td rowspan="2">Hex</td> <td>16 Bit</td> <td colspan="2">0 to FFFF(h)</td> </tr> <tr> <td>32 bit</td> <td colspan="2">0 to FFFFFFFF(h)</td> </tr> <tr> <td>Oct</td> <td>16 bit only</td> <td colspan="2">0 to 177777(o)</td> </tr> <tr> <td>Float</td> <td>32 bit only</td> <td colspan="2">-9.9e¹⁶ to 9.9e¹⁶</td> </tr> </tbody> </table> | Data Type | Data Length | Sign +/- | Alarm Range Settings | Dec | 16 Bit | Disable | 0 to 65535 | Enable | -32,768 to 32,767 | | 32 bit | Disable | 0 to 4294967295 | Enable | -2147483648 to 2147483647 | Bin | 16 Bit | 0000..0000(16 bit) to 1111..1111(16 bit) | | 32 bit | BCD | 16 Bit | 0 to 9999 | | 32 bit | 0 to 99999999 | | Hex | 16 Bit | 0 to FFFF(h) | | 32 bit | 0 to FFFFFFFF(h) | | Oct | 16 bit only | 0 to 177777(o) | | Float | 32 bit only | -9.9e ¹⁶ to 9.9e ¹⁶ | |
| | | Data Type | Data Length | Sign +/- | Alarm Range Settings | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Dec | 16 Bit | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Enable | -32,768 to 32,767 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 32 bit | Disable | 0 to 4294967295 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Enable | -2147483648 to 2147483647 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Bin | 16 Bit | 0000..0000(16 bit) to 1111..1111(16 bit) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 32 bit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | BCD | 16 Bit | 0 to 9999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 32 bit | 0 to 99999999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hex | 16 Bit | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 32 bit | 0 to FFFFFFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Oct | 16 bit only | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Float | 32 bit only | -9.9e ¹⁶ to 9.9e ¹⁶ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Alarm Color | | Sets the alarm color. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Numeral Value Color | Select an alarm display color for numeric values from among 256 colors. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Plate Color | Select an alarm display background color for numeric values from among 256 colors. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Pattern Color | Select an alarm display pattern color for numeric values from among 256 colors. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Blink | <p>Select whether the Part blinks and the blink speed. You can choose different blink settings in [Numeral Value Color], [Plate Color] and [Pattern Color].</p> <p>NOTE</p> <ul style="list-style-type: none"> There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p> "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

■ Alarm/Color/Extended

The displayed color will change depending on the numeric data range.

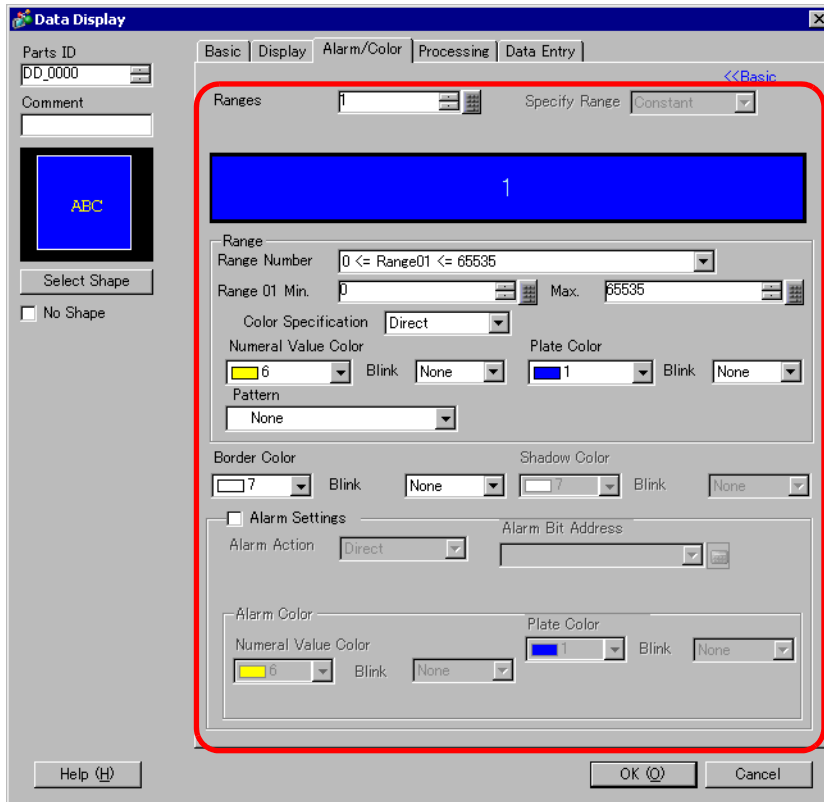


| Setting | Description |
|--------------------|--|
| Ranges | Set the number of ranges to be color-coded for the numeric display from 1 to 16. |
| Area Specification | <p>If [Ranges] is more than "2", select the method to specify the minimum and maximum for each range. If [Ranges] is "1", [Constant] is fixed.</p> <ul style="list-style-type: none"> • Constant Designate a set constant as the Min/Max value. (Direct Specification) • Address Designate the address where the Min/Max values are stored. (Indirect Specification) |

Continued


| Setting | | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|-----------------------|---|---|--------------|----------|-------|--------|-----|---------|------------|--------|-------------------|-----|---|--------------|-----|---|----------------|-----|---|--------------|-----|---|-----------|--------|-----|---------|-----------------|--------|---------------------------|-----|---|------------------|-----|---|------------------|-----|---|---------------|-------|---|
| Indirect Area Specification | | <p>If [Specify Range] is [Address], select the method to specify the address for storing the minimum and maximum numeric values.</p> <ul style="list-style-type: none"> Area After Display Address Allocated in order from Min. → Max. from the specified address in [Monitor Word Address] on the [Basic] tab. <table border="1" style="margin-left: 40px;"> <tr> <td>Monitor Word Address</td> <td>Display Data</td> </tr> <tr> <td>+1</td> <td>Min</td> </tr> <tr> <td>+2</td> <td>Max</td> </tr> <tr> <td>:</td> <td></td> </tr> </table> <p>For example: If [Monitor Word Address] is "D100", Min. is "D101", Max. is "D102".</p> <ul style="list-style-type: none"> Individual Settings Specify a Word Address for [Min.] and [Max.] individually. | Monitor Word Address | Display Data | +1 | Min | +2 | Max | : | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Monitor Word Address | Display Data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +1 | Min | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +2 | Max | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| : | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Range | Range Number | <p>Select the range for setting minimum and maximum and color within the range of 1 to 16 in [Ranges]. The value set for [Min.] and [Max.] displays.</p> <p>For example: Min. <= Range** < Max.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Min. Value/Max. Value | <p>Set the minimum and maximum values for the range selected in [Range Number]. If [Specify Range] is [Constant], input the minimum and maximum, and if it is [Address], specify the address stored in the minimum and maximum value. The setting range varies according to [Data Type] on the [Basic] tab and the presence or absence of a sign.</p> <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>Data Type</th> <th></th> <th>Sign +/-</th> <th>Range</th> </tr> </thead> <tbody> <tr> <td rowspan="6">16 Bit</td> <td rowspan="2">Dec</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td>Enable</td> <td>-32,768 to 32,767</td> </tr> <tr> <td>Hex</td> <td>—</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>Oct</td> <td>—</td> <td>0 to 177777(o)</td> </tr> <tr> <td>Bin</td> <td>—</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>BCD</td> <td>—</td> <td>0 to 9999</td> </tr> <tr> <td rowspan="6">32 bit</td> <td rowspan="2">Dec</td> <td>Disable</td> <td>0 to 4294967295</td> </tr> <tr> <td>Enable</td> <td>-2147483648 to 2147483647</td> </tr> <tr> <td>Hex</td> <td>—</td> <td>0 to FFFFFFFF(h)</td> </tr> <tr> <td>Bin</td> <td>—</td> <td>0 to FFFFFFFF(h)</td> </tr> <tr> <td>BCD</td> <td>—</td> <td>0 to 99999999</td> </tr> <tr> <td>Float</td> <td>—</td> <td>-9.9e¹⁶ to 9.9e¹⁶</td> </tr> </tbody> </table> | Data Type | | Sign +/- | Range | 16 Bit | Dec | Disable | 0 to 65535 | Enable | -32,768 to 32,767 | Hex | — | 0 to FFFF(h) | Oct | — | 0 to 177777(o) | Bin | — | 0 to FFFF(h) | BCD | — | 0 to 9999 | 32 bit | Dec | Disable | 0 to 4294967295 | Enable | -2147483648 to 2147483647 | Hex | — | 0 to FFFFFFFF(h) | Bin | — | 0 to FFFFFFFF(h) | BCD | — | 0 to 99999999 | Float | — |
| Data Type | | Sign +/- | Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Enable | -32,768 to 32,767 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | — | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Oct | — | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | — | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | — | 0 to 9999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 bit | Dec | Disable | 0 to 4294967295 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Enable | -2147483648 to 2147483647 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | — | 0 to FFFFFFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | — | 0 to FFFFFFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | — | 0 to 99999999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Float | — | -9.9e ¹⁶ to 9.9e ¹⁶ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | | Description |
|--------------|---------------------|--|
| Range | Color Specification | <p>Select how to define the color and pattern for the defined range. If [Ranges] is 2 or more, this setting is fixed as [Direct].</p> <ul style="list-style-type: none"> • Constant The [Display Color], [Pattern], and [Pattern Color] of the range specified in [Range Number] will be directly chosen and set. (Direct Specification) • Address Specify the address where the color code will be stored. (Indirect Specification) |
| | Numeral Value Color | Set the color for the Numeric Display's numeric data. |
| | Plate Color | Set a background color for the Numeric Display part. |
| | Pattern | Set a background pattern for the Numeric Display. |
| | Pattern Color | Set a pattern color for the Numeric Display. |
| Border Color | | Select the border color for the Numeric Display. |
| Shadow Color | | Set a shadow color for the Numeric Display text. |
| Blink | | <p>Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Numeral Value Color], [Plate Color], [Pattern Color], [Border Color], and [Shadow Color].</p> <p>NOTE</p> <ul style="list-style-type: none"> • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings].  "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42) |

■ Processing

You can perform an arithmetic operation on the data read from the device/PLC, and display the resulting data.

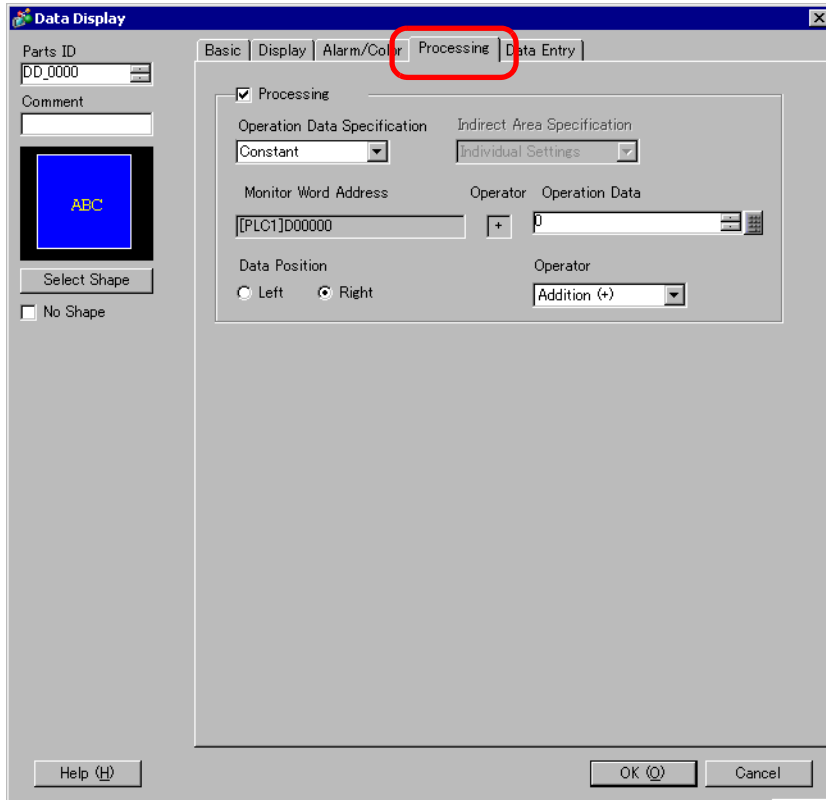



| Setting | Description |
|------------------------------|--|
| Processing | <p>Set whether to perform an arithmetic operation on the data stored in [Monitor Word Address] and display the result.</p> <p>NOTE</p> <ul style="list-style-type: none"> • In the following cases, [Processing] cannot be set: <ul style="list-style-type: none"> - When [Specify Input/Display Range] is set. - When [Alarm] are set. |
| Operation Data Specification | <p>Select the method to set the data to operate.</p> <ul style="list-style-type: none"> • Constant Write a set constant as the data to operate. (Direct Specification) • Address Designate the address which stores the data to operate. (Indirect Specification) |

Continued

| Setting | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---------------------------|----------------|--------------|-----|--------------|---------------------------|--------|---------------------|-----|---|--------------|-----|---|----------------|-----|---|--------------|--------|-----|---------|-----------------|--------|---------------------------|-----|---|------------------|-----|---|------------------|-----|---|---------------|-------|---|---|
| Processing | <p>If the [Operation Data Specification] is [Address], choose the designation method for the address which will store the data to operate.</p> <ul style="list-style-type: none"> • Area After Display Address <p>Arithmetic operations take place using the values stored in the [Monitor Word Address], and the address that follows.</p> <p>For example: When [Operation Data Specification] is [Address], [Indirect Area Specification] is [Area After Display Address], [Operator] is "+".</p> <p style="text-align: center;">In the device/PLC GP unit</p> <div style="display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid gray; padding: 5px; margin-right: 10px;"> <table border="1" style="font-size: 8px;"> <tr> <td>Monitor Word Address</td> <td>Operator</td> <td>Operation Data</td> </tr> <tr> <td>[PLC1]D00000</td> <td>+</td> <td>[PLC1]D00001</td> </tr> </table> </div> <div style="margin-right: 10px;">→</div> <div style="border: 1px solid gray; padding: 5px; margin-right: 10px;"> <table border="1" style="font-size: 8px;"> <tr> <td>Monitor Word Address D100</td> <td>40</td> </tr> <tr> <td>Operation Data D101</td> <td>5</td> </tr> </table> </div> <div style="margin-right: 10px;">→</div> <div style="border: 2px solid black; padding: 10px; text-align: center; width: 60px; height: 60px;"> <div style="border: 1px solid black; width: 40px; height: 40px; margin: 0 auto;"></div> <p style="font-size: 24px; margin: 0;">45</p> </div> </div> <ul style="list-style-type: none"> • Individual Settings <p>Select a separate Word Address for the operation data.</p> | Monitor Word Address | Operator | Operation Data | [PLC1]D00000 | + | [PLC1]D00001 | Monitor Word Address D100 | 40 | Operation Data D101 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Monitor Word Address | Operator | Operation Data | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | [PLC1]D00000 | + | [PLC1]D00001 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Monitor Word Address D100 | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operation Data D101 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Monitor Word Address</p> <p>The [Monitor Word Address] specified on the [Basic] tab displays.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Operation Data</p> <p>For [Word Address] data, set the other data.</p> <p>If the [Operation Data Specification] is set to [Constant], enter the operation data here. Each [Data Type] on the [Basic] tab has a different size range. If [Address] is set, specify the address where the operation data will be stored.</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th colspan="2">Data Type</th> <th>Sign +/-</th> <th>Range</th> </tr> </thead> <tbody> <tr> <td rowspan="5">16 Bit</td> <td rowspan="2">Dec</td> <td>Disable</td> <td>0 to 65535</td> </tr> <tr> <td>Enable</td> <td>-32,768 to 32,767</td> </tr> <tr> <td>Hex</td> <td>—</td> <td>0 to FFFF(h)</td> </tr> <tr> <td>Oct</td> <td>—</td> <td>0 to 177777(o)</td> </tr> <tr> <td>Bin</td> <td>—</td> <td>0 to FFFF(h)</td> </tr> <tr> <td rowspan="5">32 bit</td> <td rowspan="2">Dec</td> <td>Disable</td> <td>0 to 4294967295</td> </tr> <tr> <td>Enable</td> <td>-2147483648 to 2147483647</td> </tr> <tr> <td>Hex</td> <td>—</td> <td>0 to FFFFFFFF(h)</td> </tr> <tr> <td>Bin</td> <td>—</td> <td>0 to FFFFFFFF(h)</td> </tr> <tr> <td>BCD</td> <td>—</td> <td>0 to 99999999</td> </tr> <tr> <td>Float</td> <td>—</td> <td>-9.9e¹⁶ to 9.9e¹⁶</td> </tr> </tbody> </table> | Data Type | | Sign +/- | Range | 16 Bit | Dec | Disable | 0 to 65535 | Enable | -32,768 to 32,767 | Hex | — | 0 to FFFF(h) | Oct | — | 0 to 177777(o) | Bin | — | 0 to FFFF(h) | 32 bit | Dec | Disable | 0 to 4294967295 | Enable | -2147483648 to 2147483647 | Hex | — | 0 to FFFFFFFF(h) | Bin | — | 0 to FFFFFFFF(h) | BCD | — | 0 to 99999999 | Float | — | -9.9e ¹⁶ to 9.9e ¹⁶ |
| Data Type | | Sign +/- | Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 Bit | Dec | Disable | 0 to 65535 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Enable | -32,768 to 32,767 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | — | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Oct | — | 0 to 177777(o) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | — | 0 to FFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 bit | Dec | Disable | 0 to 4294967295 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Enable | -2147483648 to 2147483647 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hex | — | 0 to FFFFFFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bin | — | 0 to FFFFFFFF(h) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BCD | — | 0 to 99999999 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Float | — | -9.9e ¹⁶ to 9.9e ¹⁶ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | | Description |
|------------|---------------|--|
| Processing | Data Position | <p>Select the Operation Data or Destination Word Address display position from [Right] or [Left].</p> <p>Right: The Monitor Word Address is left, the Operation Data or Destination Word Address is right Word Address</p>  <p>Left: The Operation Data or Destination Word Address is left, the Monitor Word Address is right</p>  |
| | Operator | <p>Choose an operator from [Addition (+)], [Subtraction (-)], [Mult. (*)], [Division (/)], [Logical (AND)], [Logical OR ()], or [Exclusive OR (^)].</p> <p>NOTE</p> <ul style="list-style-type: none"> When the data format for a calculation is 32 bit Float, only addition, subtraction, multiplication and division can be performed. |

NOTE


- Any overflowing digits resulting from an arithmetic operation will be ignored. For example, When [16 Bit Hex] is set, the result of "FFFF(h) + 1(h)" would be "0000(h)".
- If division produces a remainder, an error may occur as a result of rounding the decimal.
- Results of base address + offset value calculations are always handled as 16 bit Bin values, regardless of the data length and data format settings. If a calculation result exceeds 16 bits (exceeds 65,535), bit 0 to bit 15 are handled as the valid bits, and higher-order bits are discarded.

14.11.2 Text Display

■ Basic Settings/Basic

Displays text stored in the specified device/PLC word address.


☞ “14.3 Displaying/Inputting Text Data” (page 14-8)

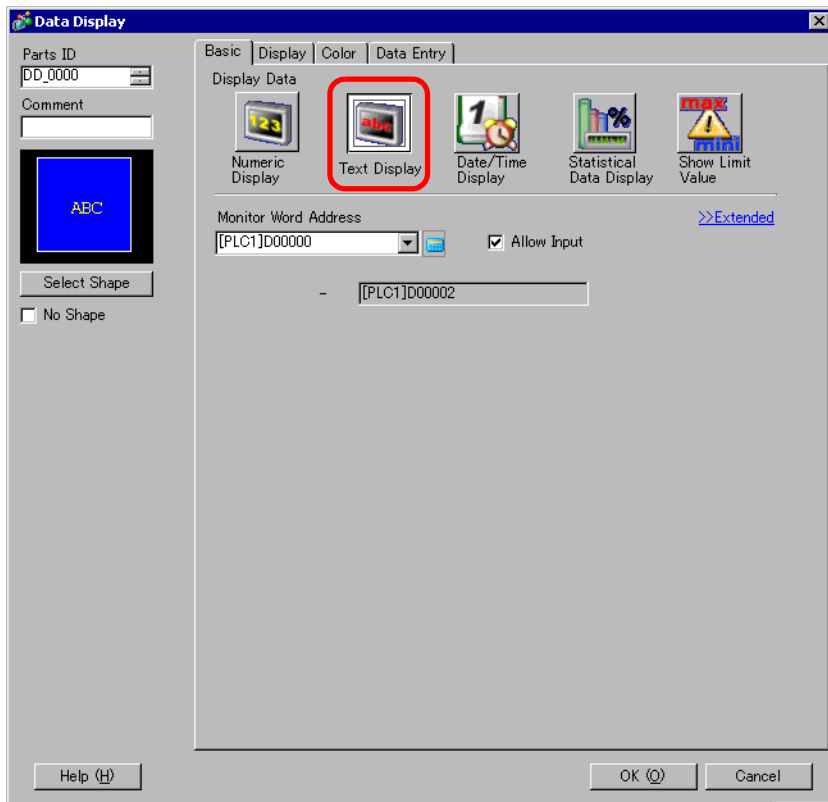

| Setting | Description |
|----------------------|--|
| Monitor Word Address | <p>The Text Display displays text beginning with the word address defined here, for the number of consecutive addresses defined by the [Display Characters] in the [Display] tab.</p> <p>For example: When the [Display] tab's [Display characters] is "5" and the [Monitor Word Address] is "D100", the last address will become "D102".</p> <p>NOTE</p> <ul style="list-style-type: none"> The relationship of high order and low order Word data will differ according to the device/PLC type. |
| Allow Input | Set whether keypad and barcode reader input will be accepted by the Text Display. |


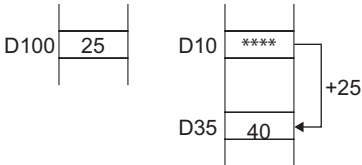

■ Basic Settings/Extended

You can indirectly specify an address for the Text Display, or set up an update condition for displayed text.

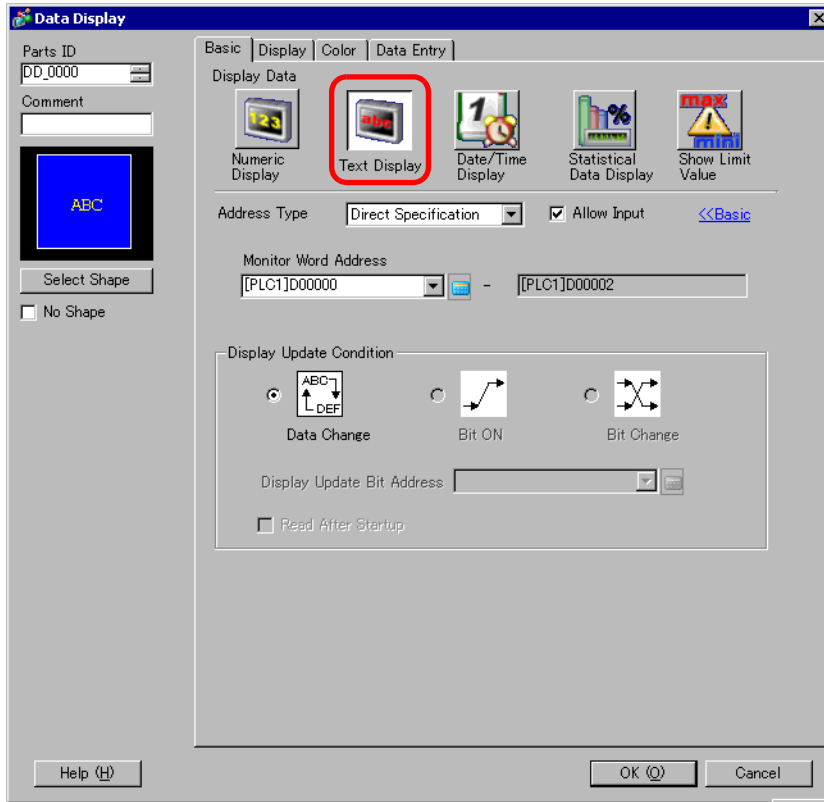

| Setting | Description |
|----------------------|---|
| Address Type | Select how you want to define the display address (Monitor Address): [Direct Specification], [Address], or [Device Type Address]. |
| Allow Input | You can accept input from a keypad, bar code reader, or a two-dimensional bar code reader. Select this check box to display the [Data Entry] tab. |
| Monitor Word Address | You can have a real-time numeric display of data stored in the Word Address specified here. To indirectly specify the Monitor Word Address, in the [Address Type] list select [Address] or [Device Type Address]. |
| Address | Indirectly designates to the device specified in [Base Address]. |

Continued

| Setting | | Description |
|-----------------------|--|--|
| Monitor Word Address | Address | Base Address |
| | | Offset Value Specification Address |
| | Bin, BCD |  <p>The [Base Address] becomes the standard indirectly designated address. In [Offset Value Specification Address], set the address that stores the offset value from the [Base Address]. Example: When you indirectly specify [Monitor Word Address] D35 [Base Address] = D10 [Offset Value Specification Address] = D100 The data in [Offset Value Specification Address] is handled as the offset value from the [Base Address].</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>In the device/PLC</p>  </div> <div style="text-align: center;"> <p>GP unit</p>  </div> </div> <p>The [Base Address] (D10) is added to the [Offset Value Specification Address] (D100)'s data, which is "25", and the resulting address D35's data "40" displays.</p> |
| | Bin, BCD | Choose the type of data stored in the [Offset Value Specification Address] from [Bin] or [BCD]. |
| Device Type & Address | Indirectly designates both the device and address. | |
| Device/PLC | When [Address Type] is [Device Type & Address], select which device/PLC's address to indirectly designate. | |

Continued

| Setting | | Description |
|----------------------|---------------------|--|
| Monitor Word Address | Device Type Address | Device Specification Start Address |
| | | <div data-bbox="546 214 1105 355" data-label="Image"> </div> <p>Input the start address of the Word Address to specify the Display Address in [Device Specification Start Address]. Store the Address Mode in [Device Specification Start Address]. Address Mode is the mode to determine if the Device Address is for Internal or External (PLC) Device. Store the Device Code and the Address Code in the three Words following [Device Specification Start Address]. The Word Address specified with the Device Code and the Address Code will be displayed.</p> <p>Example: When you indirectly specify [Monitor Word Address] CN35 [Device Specification Start Address] = D100 [Address Mode] = External (PLC) Device [Device Code] = CN: 0061</p> <div data-bbox="440 784 1153 991" data-label="Diagram"> </div> <p>*1 Address Mode 0: External (PLC) Device 1: Internal Device In the above case, 0 is stored.</p> <p>*2 Please see the "GP-Pro EX Device/PLC Connection Manual" for device codes. If you select an internal device, the device codes are LS area: 0000 and USR area: 0001.</p> <p>The address designated by D100, D101, D102, and D103 is CN35. Its data, "40", displays.</p> <div data-bbox="403 1257 491 1296" data-label="Section-Header"> <p>NOTE</p> </div> <ul style="list-style-type: none"> • If the indirectly-designated address is out of range or does not exist, a communication error will occur. An error can affect the screen update. When an error occurs, check the indirectly-designated data and write the correct value to the device/PLC address to restore the screen update. |


Continued

| Setting | Description |
|----------------------------|--|
| Display Update Condition | <p>Designate the condition which will update the display. This can only be set on the Detail screen.</p> <ul style="list-style-type: none"> • Data Change The display is updated when a change occurs in the data stored in the [Monitor Word Address] on the [Basic] tab. • Bit ON The display is updated when a bit stored in the [Monitor Word Address] on the [Basic] tab turns ON. • Bit Change The display is updated when a bit stored in the [Monitor Word Address] on the [Basic] tab changes state from ON to OFF or from OFF to ON. |
| Display Update Bit Address | <p>Defines the ON/OFF trigger bit address for when [Display Update Condition] is set to [Bit ON] or [Bit Change].</p> |
| Read After Startup | <p>When the text data has a large volume or many Text Display parts are set on the single screen, select this check box for each Text Display to increase other tags' display speeds. However, when this is checked, Text Display speeds will decrease.</p> |

NOTE




- After the data has been changed in the monitor address, please change the [Display Update Bit Address] so the text displays. If the changing order is reversed, the text may not display properly.
- If the [Display Update Bit Address] changes immediately after the text data changes in the device/PLC, there may be instances where the text does not display correctly. In this case, program the device/PLC to use the [Wait to Send] to slightly delay the trigger bit change.
The [Wait to Send] period depends on the amount of placed parts, scan time, baud rate, and the number of characters used.

■ Data Entry/Basic


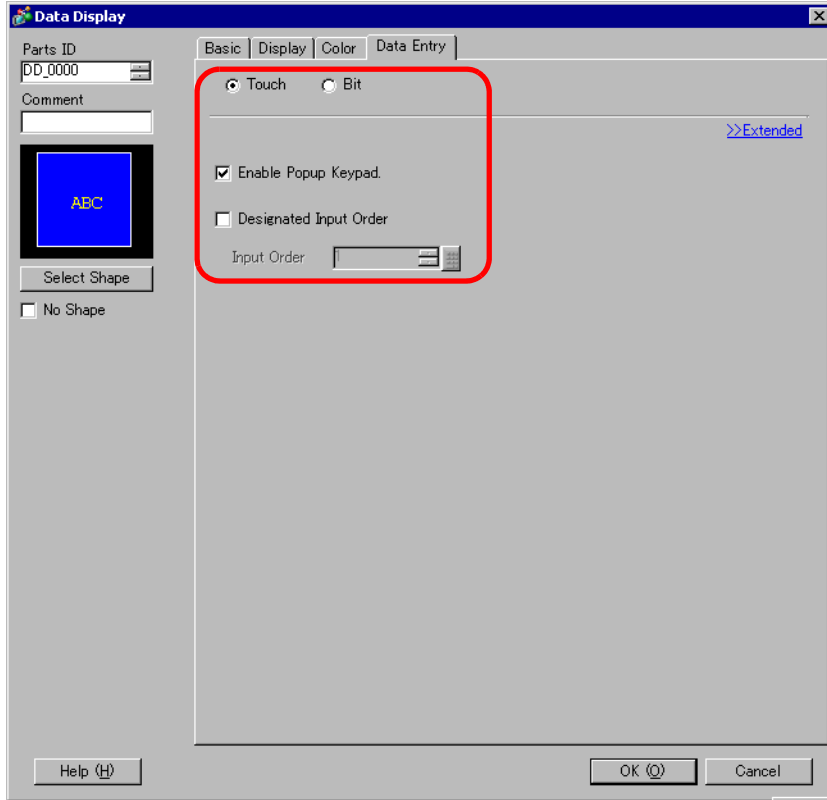



| Setting | Description |
|---------------------------|--|
| <p>Data Entry Methods</p> | <p>Select the method that will change the Data Display to input state (cursor display state).</p> <ul style="list-style-type: none"> • Touch When the Data Display is touched, it will change to the Allow Input state. |

Continued

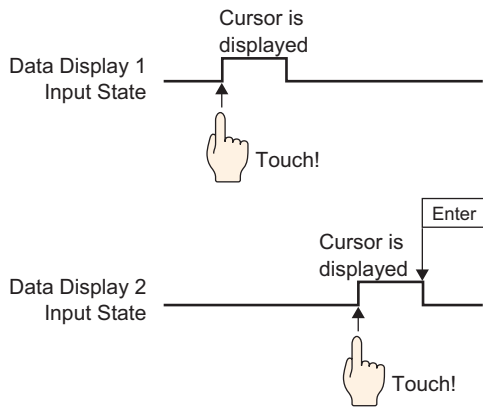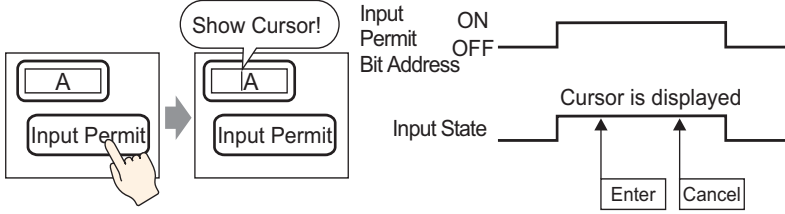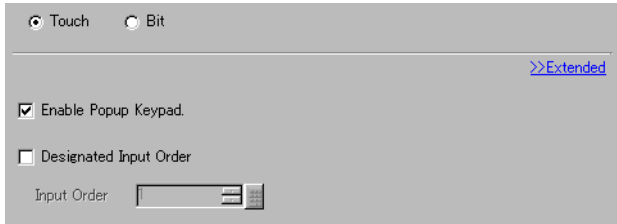
| Setting | Description |
|---------------------------|--|
| <p>Data Entry Methods</p> | <p>NOTE</p> <ul style="list-style-type: none"> If you touch a Data Display while inputting data into another Data Display, the input data will revert to its previous data, and the most recently touched part will enter the Allow Input state.  <p>Touch Data Display 1 and without deciding touch Data Display 2 and...</p> <ul style="list-style-type: none"> Bit When the Allow Input Bit Address is ON, the Data Display is in the Allow Input state.  <p>Touch → Variable set in [Input Permit Bit Address] is turned ON!</p> <p>NOTE</p> <ul style="list-style-type: none"> If the [Allow Input Bit Address] is turned OFF while inputting data in a Data Display, the Allow Input state is canceled, and the input data is erased. |
| <p>Touch</p> |  |

Continued
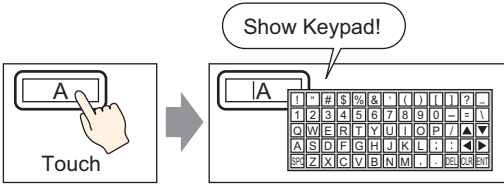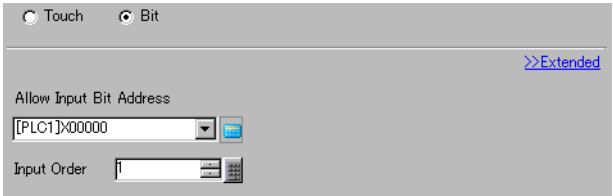
| Setting | | Description |
|---------|-------------------------|---|
| Touch | Enable Popup Keypad | <p>Select whether a pop-up keypad will display when you touch the Data Display part.</p>  <p>NOTE</p> <ul style="list-style-type: none"> A pop-up keypad cannot be used when the Data Display is placed on a Window screen. |
| | Designated Input Order | When entering data into multiple Data Displays in sequence, select the order in which each display enters the input state. |
| | Input Order | Select the order, from 1 to 384, in which the Part will enter the input state. |
| Bit | |  |
| | Allow Input Bit Address | When the bit address set here turns ON, the Data Display enters the input state. |

| Setting | | Description |
|---------|-------------|--|
| Bit | Input Order | <p>Select the order from 1 to 384 that the Part will enter the Allow Input state if multiple [Allow Input Bit Addresses] turn ON at the same time (when a bit address has been registered to multiple Data Display parts, or when different bit addresses turn ON at the same time).</p> <p>NOTE</p> <ul style="list-style-type: none"> • If more than one [Allow Input Bit Address] is turned ON at the same time, the Data Displays will enter the input state according to their [Input Order] settings. If the [Input Order] settings are the same, the input state order will be determined by the order the parts were placed. • If the [Allow Input Bit Address] of Data Displays placed on the Base Screen and Window Screen turn ON at the same time, the Base Screen will have a higher priority for the input state than the Window Screen. When placing Data Displays on both the Base and Window screen, make sure to set a different [Allow Input Bit Address]. <div style="text-align: center;">  <p>Multiple [Allow Input Bit Addresses] turn ON simultaneously</p> </div> |

■ Data Entry/Extended


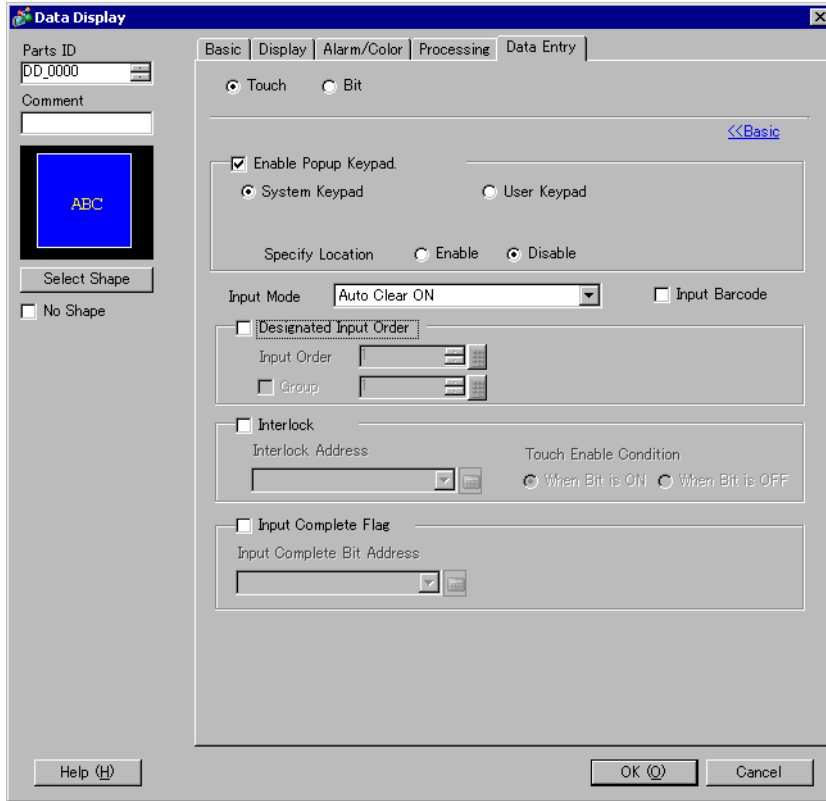


| Setting | | Description |
|---------|----------------------|--|
| Touch | Enable Pop-up Keypad | Select whether a pop-up keypad will display when you touch the Data Display part. NOTE <ul style="list-style-type: none"> A pop-up keypad cannot be used when the Data Display is placed on a Window screen. |
| | Keypad Type | <ul style="list-style-type: none"> System Keypad Use the standard keypad registration for GP-Pro EX. Use this in normal cases. User Keypad Create a user-defined keypad with the Keypad part. This keypad allows for customized input. ☞ “15.5.1 Keypad Settings Guide ■ User Keypad” (page 15-23) |
| | System Keypad | Display the prepared standard keypad registration in GP-Pro EX. |


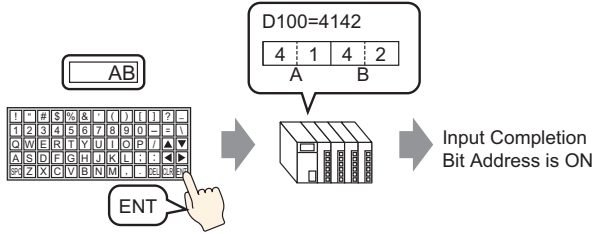
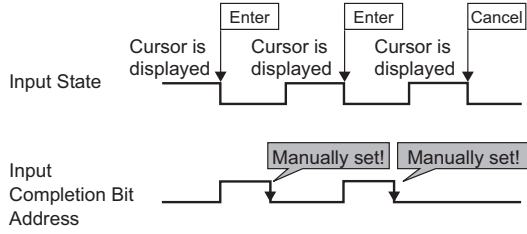
Continued

| Setting | | Description | | | | | | | | | | | | | |
|------------------------|--------------------------|--|---|--------------------------|-------------------------|----------------|----|---------------|-----|----------------|-----------------|----|----------------|-----|---------------|
| Touch | User Keypad | Keypad Set the number of the custom-made keypad. ☞ “15.5.1 Keypad Settings Guide ■ User Keypad” (page 15-23) | | | | | | | | | | | | | |
| | Specify Location | | Select whether to set the pop-up keypad display position. If [Do] is selected, the pop-up keypad Display Area can be selected and moved after the Data Display part is positioned. NOTE • When you group a Data Display with other parts, you cannot select or move the pop-up keypad display area. | | | | | | | | | | | | |
| | Designated Input Order | | When entering data into multiple Data Displays in sequence, select the order in which each display enters the input state. | | | | | | | | | | | | |
| | | Input Order | Select the order, from 1 to 384, in which the Part will enter the input state. | | | | | | | | | | | | |
| | | Group Number | Divide the Data Displays into groups for continuous data input. The cursor will move in turn to each successive Data Display registered in the same group, according to the input order, setting them into the Allow Input state. The Group Number can be from 1 to 10. ☞ “14.13.2 Set Input Order by Group” (page 14-111) | | | | | | | | | | | | |
| | | Inter lock | This function only allows input when a bit designated via [Interlock Address] is in a state that has been selected via [Touch Enable Condition]. Select whether to use the Interlock function. ☞ “14.7 Preventing Operational Errors By Using Interlock” (page 14-24) | | | | | | | | | | | | |
| | | Inter lock Address | Select the bit address that will designate the enable condition, to allow input to be entered. This address state will determine if touch is enabled or disabled. | | | | | | | | | | | | |
| | Touch Enable Condition | Select the condition that will enable the part to be touched, to allow input to be entered. <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Touch Enable Condition</th> <th>Interlock Address Status</th> <th>Touch Enabled/ Disabled</th> </tr> </thead> <tbody> <tr> <td rowspan="2">When Bit is ON</td> <td>ON</td> <td>Touch enabled</td> </tr> <tr> <td>OFF</td> <td>Touch disabled</td> </tr> <tr> <td rowspan="2">When Bit is OFF</td> <td>ON</td> <td>Touch disabled</td> </tr> <tr> <td>OFF</td> <td>Touch enabled</td> </tr> </tbody> </table> NOTE • When the Interlock [Touch Enable Condition] is disabled during input, the Data Display will remain in the Allow Input state. Interlock will not work until the input is completed. | Touch Enable Condition | Interlock Address Status | Touch Enabled/ Disabled | When Bit is ON | ON | Touch enabled | OFF | Touch disabled | When Bit is OFF | ON | Touch disabled | OFF | Touch enabled |
| Touch Enable Condition | Interlock Address Status | Touch Enabled/ Disabled | | | | | | | | | | | | | |
| When Bit is ON | ON | Touch enabled | | | | | | | | | | | | | |
| | OFF | Touch disabled | | | | | | | | | | | | | |
| When Bit is OFF | ON | Touch disabled | | | | | | | | | | | | | |
| | OFF | Touch enabled | | | | | | | | | | | | | |

Continued

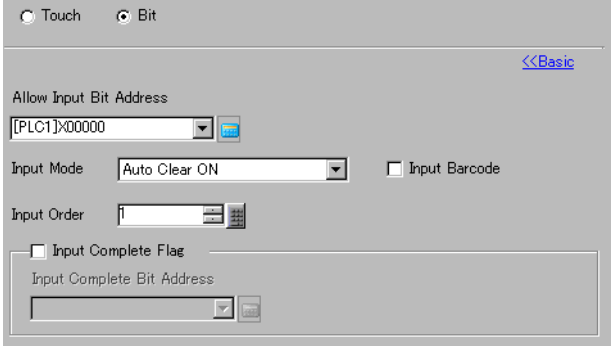
| Setting | Description |
|-------------------------|---|
| Bit |  |
| Allow Input Bit Address | When the bit address set here turns ON, the Data Display enters the input state. |
| Input Order | <p>Select the order from 1 to 384 that the Part will enter the Allow Input state if multiple [Allow Input Bit Addresses] turn ON at the same time (when a bit address has been registered to multiple Data Display parts, or when different bit addresses turn ON at the same time).</p> <p>NOTE</p> <ul style="list-style-type: none"> • If more than one [Allow Input Bit Address] is turned ON at the same time, the Data Displays will enter the input state according to their [Input Order] settings. If the [Input Order] settings are the same, the input state order will be determined by the order the parts were placed. • If the [Allow Input Bit Address] of Data Displays placed on the Base Screen and Window Screen turn ON at the same time, the Base Screen will have a higher priority for the input state than the Window Screen. When placing Data Displays on both the Base and Window screen, make sure to set a different [Allow Input Bit Address].  <p>Multiple [Allow Input Bit Addresses] turn ON simultaneously</p> |

Continued

| Setting | Description |
|--|---|
| <p>Input Mode</p> | <ul style="list-style-type: none"> • Auto Clear OFF New text data will build on previously input data. Pressing [CLR] on the keypad clears the value. • Auto Clear ON The first key pressed (except move cursor, [ENT], [DEL], or [BS]) will clear the previously input text data. • Auto Clear ON + Input Check When using barcode input, check whether the number of input digits coincide with the [Display characters]. If they do not coincide, the data will not be written to the Word Address. |
| <p>Input Barcode</p> | <p>A setting that allows input from a barcode reader.  "16.2.2 Setup Procedure" (page 16-5)</p> |
| <p>Input Complete Flag</p> | <p>Detects and notifies you when input has been completed.</p>  |
| <p>Input Complete Flag Bit Address</p> | <p>Sets the bit address that will turn ON when input has been completed.</p>  <p>NOTE</p> <ul style="list-style-type: none"> • Please return this bit to OFF after input has been completed. |

■ Display


Set the Text Display's font and attributes.

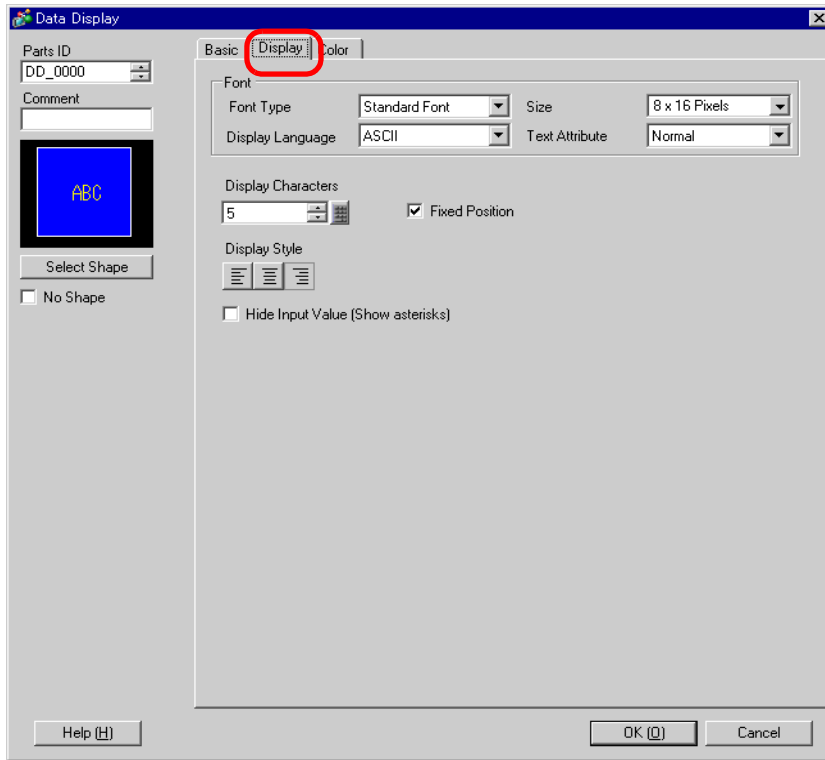

| Setting | Description |
|-----------------------------------|--|
| Font | Set a font for the text. |
| Font Type | Choose a font type for the text. |
| Size | Choose a font size for the text. Standard Font: (8 to 64) x (8 to 128) Standard Font (Fixed Size): [6x10], [8x13], [13x23] (Displays single-byte characters only) Stroke Font: Select from 6 to 127. |
| Display Language | Select the display language: [Japanese], [ASCII], [Chinese (Simplified)], [Chinese (Traditional)], [Korean], [Cyrillic], or [Thai]. |
| Text Attribute | Select the text attributes. Standard Font: Choose from [Standard], [Bold], [Shadow] (When using the [6x10] font size, select either [Standard] or [Shadow].) Stroke Font: Choose from [Standard], [Bold], [Outline] |
| Display Characters | Set the number of characters to be displayed from 1 to 100. |
| Fixed Position | Set whether the text will be fixed in the center of the Part. |
| Display Style | Select the alignment of the text display area's text: [Align Right], [Align Left], or [Align Center]. |
| Hide Input Value (Show asterisks) | Set whether Input Values will be indicated by asterisks. |

■ Color/Basic


Select the Text Display's color.

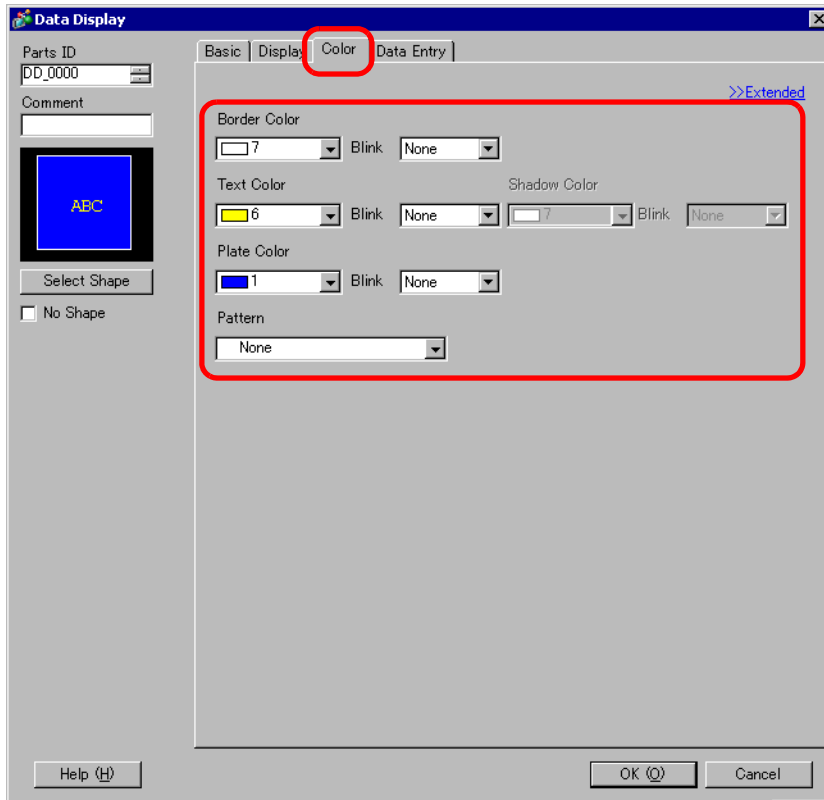

| Setting | Description |
|---------------|--|
| Border Color | Select a border color. |
| Text Color | Select a text color. |
| Shadow Color | Select a text background color. |
| Plate Color | Select a background color. |
| Pattern | Select a background pattern. |
| Pattern Color | Select a background pattern color. |
| Blink | Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Border Color], [Text Color], [Shadow Color], [Plate Color], and [Pattern Color]. <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p> "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42)</p> |

■ Color/Extended

Select how the text color changes when the bit turns ON.

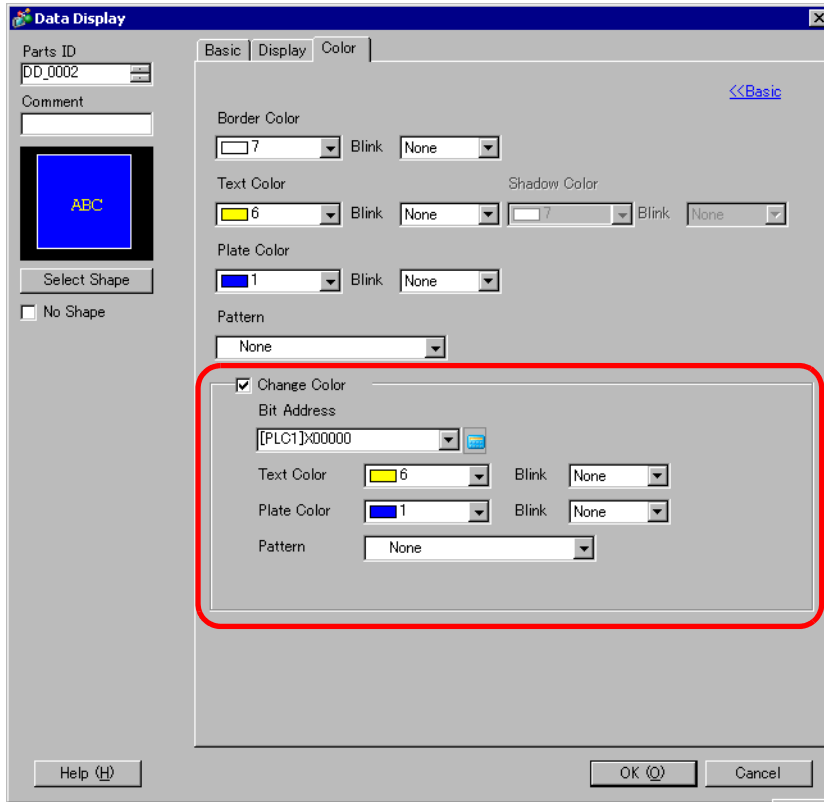


| Setting | Description |
|---------------|---|
| Change Color | Select whether a different color will be displayed when the designated [Bit Address] turns ON. |
| Bit Address | When the address set here turns ON, the color change will occur. |
| Text Color | When the [Bit Address] turns ON, this text color will be displayed. |
| Plate Color | When the [Bit Address] turns ON, this background color will be displayed. |
| Pattern | Select a background pattern. |
| Pattern Color | Select a background pattern color. |
| Blink | Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Text Color], [Plate Color], and [Pattern Color]. <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p>☞ "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42)</p> |

14.11.3 Date/Time Display

■ Basic Settings

Displays the Date/Time.

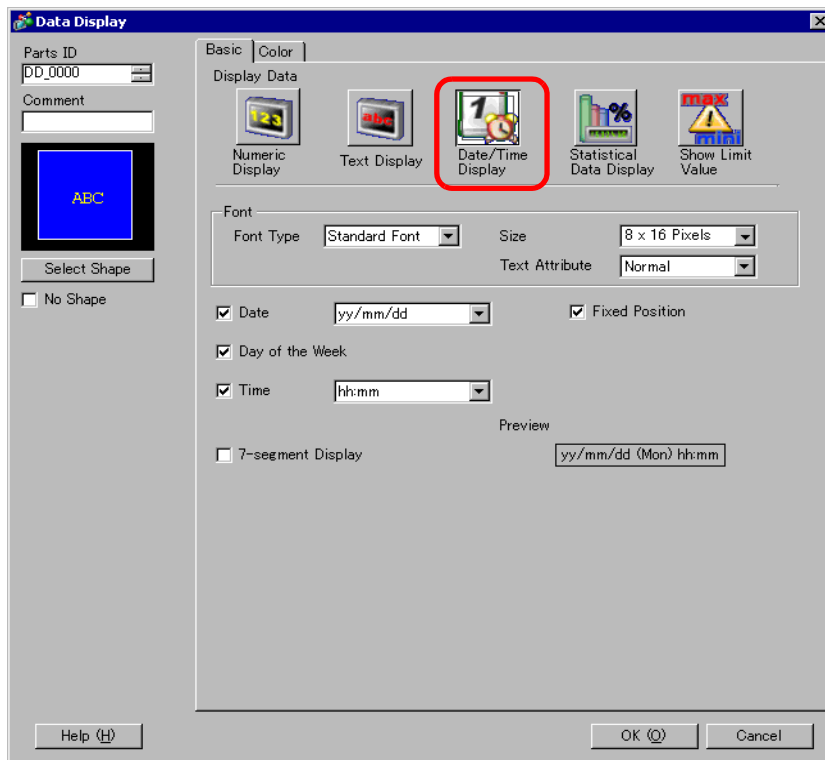

| Setting | Description |
|----------------|--|
| Font | Set a font for the date/time. |
| Font Type | Choose a font type for the date/time from [Standard Font] or [Stroke Font]. |
| Size | Choose a font size for the date/time. Standard Font: (8 to 64) x (8 to 128) Standard Font (Fixed Size): [6x10], [8x13], [13x23] (Displays single-byte characters only) Stroke Font: Select from 6 to 127. |
| Text Attribute | Select the text attributes. Standard Font: Choose from [Standard], [Bold], [Shadow] (When using the [6x10] font size, select either [Standard] or [Shadow].) Stroke Font: Choose from [Standard], [Bold], [Outline] |
| | <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> This setting is unavailable for [7-segment Display]. |


Continued

| Setting | Description |
|-------------------|---|
| Date | <p>Set whether to display the date, and select the display format from [yy/mm/dd], [dd/mm/yy], [mm/dd/yy], [20yy/mm/dd], [dd/mm/20yy], or [mm/dd/20yy].</p> <p>NOTE</p> <ul style="list-style-type: none"> When working with a double-byte character language and you select a display format that includes the year, month or date, values display in double-byte characters. However, if you select [7-segment Display], those same values display in single-byte characters. |
| Day of the Week | <p>Select whether to display the day.</p> |
| Sampling | <p>Specify whether to display the time and select the time format from [hh:mm] or [hh:mm:ss].</p> <p>NOTE</p> <ul style="list-style-type: none"> When working with a double-byte character language and you select a display format that includes hours, minutes, or seconds, values display in double-byte characters. However, if you select [7-segment Display], those same values display in single-byte characters. |
| Fixed Position | <p>Select this option to display the numeric value in the center of the part.</p> |
| 7-segment Display | <p>Select this option to show values as a 7-segment display.</p> <p>NOTE</p> <ul style="list-style-type: none"> This cannot be set when [Size] is [Fixed Size]. This can be set only when [Text Attribute] is selected as [Standard]. |
| Preview | <p>Displays the data image according to the settings.</p> |

■ Color

The Color tab settings define the colors in the Date/Time Display part.

☞ “14.6 Displaying the Date and Time” (page 14-22)

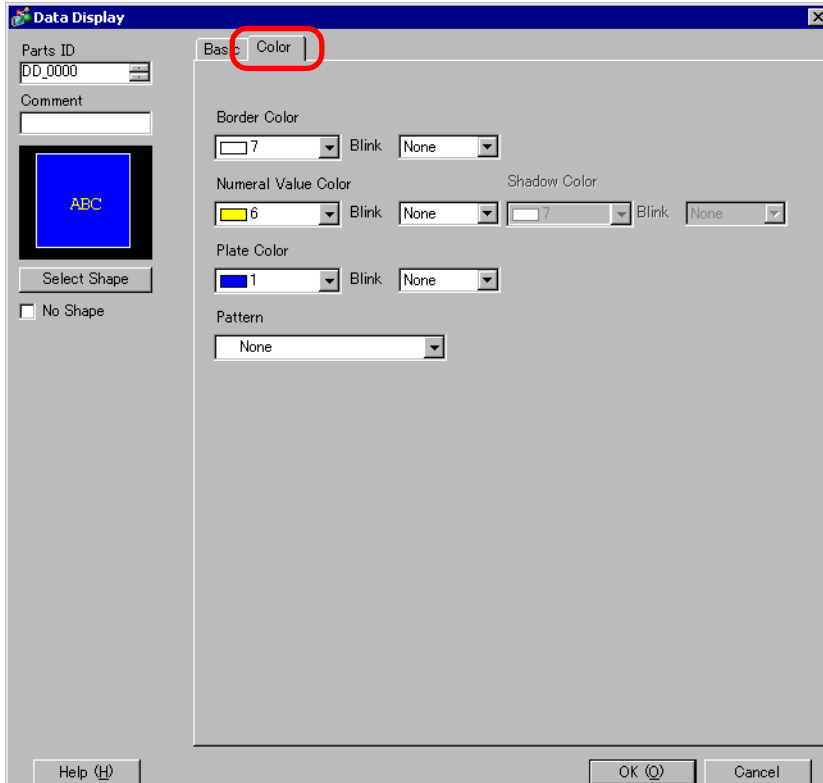


| Setting | Description |
|---------------------|--|
| Border Color | Defines the border color for the Date/Time Display. |
| Numeral Value Color | Defines the text color for the Date/Time Display. |
| Shadow Color | Defines the text shadow color for the Date/Time Display. |
| Plate Color | Defines the plate color for the Date/Time Display. |
| Pattern | Defines the pattern for the Date/Time Display. |
| Pattern Color | Defines the color that intersperses the plate color to create a pattern for the Date/Time Display. |
| Blink | <p>Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Border Color], [Numeral Value Color], [Shadow Color], [Plate Color], and [Pattern Color].</p> <p>NOTE</p> <ul style="list-style-type: none"> • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p>☞ “8.5.1 Setting Colors ■ List of Available Colors” (page 8-42)</p> |

14.11.4 Statistical Data Display

This function takes statistics from the values of successive Word Addresses, and displays them as numeric values. This is mainly used to display statistical graph data set in a Graph. The statistical data settings can be set independently, even without using the Graph's settings.


■ Basic Settings

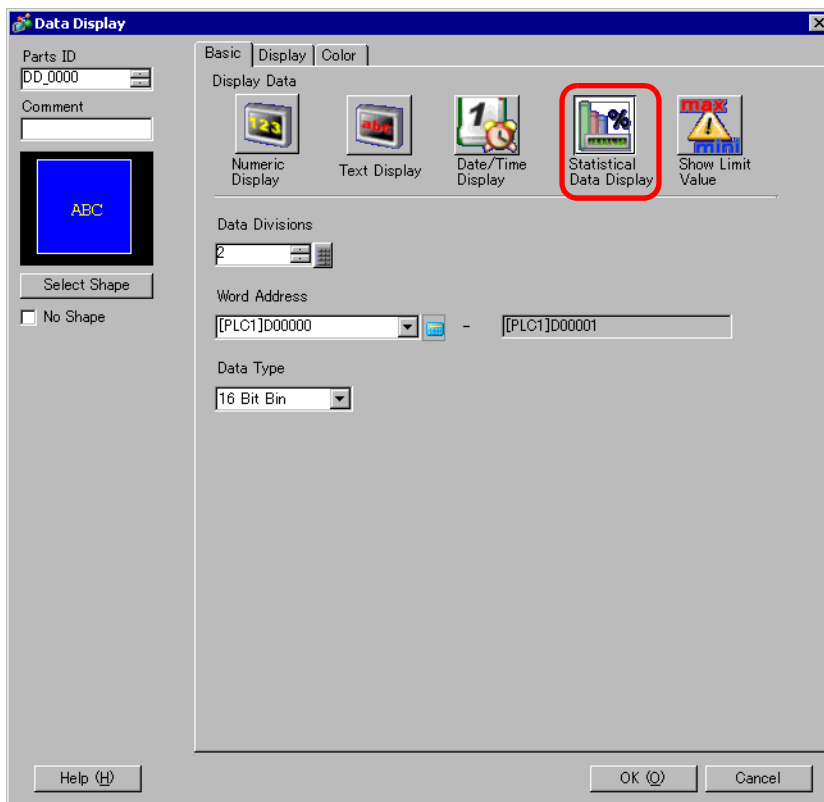

| Setting | Description | | | | | | |
|----------------|---|------------|-----------|--------|----------|--------|-----------------|
| Data Divisions | Set the no. of Data shown in the Statistical Data Display. The value can be from 2 to 16. | | | | | | |
| Word Address | Defines the initial Word Address for data in the Statistical Data Display. Data Divisions defines the number of consecutive word addresses from this word address displayed in the Statistical Data Display part. When using the Statistical Data Display with a Data Block Display Graph, the word address in this field corresponds to the graph's. | | | | | | |
| Data Type | Select the type of data to be displayed. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Bit Length</th> <th>Data Type</th> </tr> </thead> <tbody> <tr> <td>16 Bit</td> <td>Bin, BCD</td> </tr> <tr> <td>32 bit</td> <td>Bin, BCD, Float</td> </tr> </tbody> </table> <p>NOTE</p> <ul style="list-style-type: none"> A single Statistical Data Display cannot combine data from different data types such as Bin, BCD, and Float. | Bit Length | Data Type | 16 Bit | Bin, BCD | 32 bit | Bin, BCD, Float |
| Bit Length | Data Type | | | | | | |
| 16 Bit | Bin, BCD | | | | | | |
| 32 bit | Bin, BCD, Float | | | | | | |

■ Display

Set the Statistical Data Display's font and attributes.

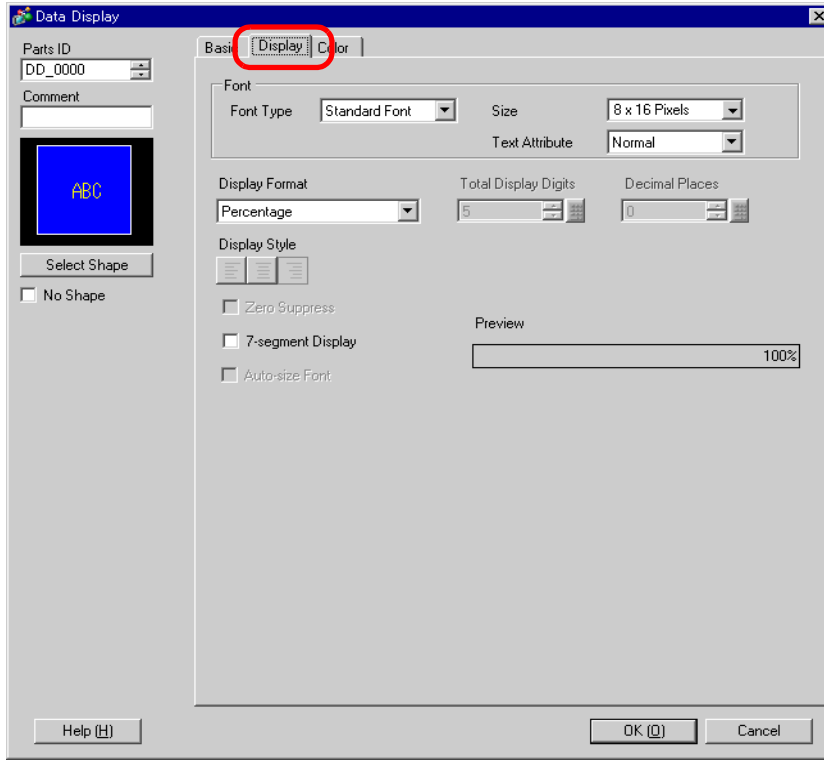

| Setting | Description |
|----------------|--|
| Font | Set a font for the text. |
| Font Type | Choose a font type for the statistical data from [Standard Font] or [Stroke Font]. |
| Size | Choose a font size for the statistical data. Standard Font: (8 to 64) x (8 to 128) Standard Font (Fixed Size): [6x10], [8x13], [13x23] (Displays single-byte characters only) Stroke Font: Select from 6 to 127. |
| Text Attribute | Select the text attributes. Standard Font: Choose from [Standard], [Bold], [Shadow] (When using the [6x10] font size, select either [Standard] or [Shadow].) Stroke Font: Choose from [Standard], [Bold], [Outline] |
| | <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> When using [Auto-size Font] with either [7-segment Display] or [Stroke Font], the [Text Attribute] cannot be defined. |

Continued


| Setting | Description | | | | | | | | | | | | | | | | | | | |
|--|--|----------------------|----------------|----------------------|----------------|--------|-----|---------|---------|-----|---|--------|-----|---------|---------|-----|---|-------|---------|---------|
| Display Format | <p>There are three ways to display statistical data: [Percentage], [Numeric Value], and [Numeric Value + Percentage].</p> <p>IMPORTANT</p> <ul style="list-style-type: none"> When [Percentage] has been selected, the division operation may create results that, when totaled, do not add up to exactly 100%. | | | | | | | | | | | | | | | | | | | |
| Total Display Digits Decimal Places | <p>Select the number of digits to display in the numeric display with [Total Display Digits]. Numbers after the decimal point are included in the display digits. However, the decimal point is not included in the display digits. Each data format has a different size range.</p> <p>Use [Decimal Places] to select the number of digits after the decimal point. This setting is available when the [Data Type] is [Bin] or [Float]. The number of decimal places you can set up depends on the [Data Type].</p> <p>For example: When the Total Display Digits is 5, and the Decimal Places is 2, the Numeric Display will appear as follows.</p> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 10px auto;">123.45</div> <table border="1" style="margin: 10px auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Data Length</th> <th>Data Type</th> <th>Total Display Digits</th> <th>Decimal Places</th> </tr> </thead> <tbody> <tr> <td rowspan="2">16 Bit</td> <td>Bin</td> <td rowspan="2">1 to 11</td> <td>1 to 10</td> </tr> <tr> <td>BCD</td> <td>-</td> </tr> <tr> <td rowspan="3">32 bit</td> <td>Bin</td> <td rowspan="2">1 to 11</td> <td>1 to 10</td> </tr> <tr> <td>BCD</td> <td>-</td> </tr> <tr> <td>Float</td> <td>1 to 17</td> <td>1 to 16</td> </tr> </tbody> </table> | Data Length | Data Type | Total Display Digits | Decimal Places | 16 Bit | Bin | 1 to 11 | 1 to 10 | BCD | - | 32 bit | Bin | 1 to 11 | 1 to 10 | BCD | - | Float | 1 to 17 | 1 to 16 |
| Data Length | Data Type | Total Display Digits | Decimal Places | | | | | | | | | | | | | | | | | |
| 16 Bit | Bin | 1 to 11 | 1 to 10 | | | | | | | | | | | | | | | | | |
| | BCD | | - | | | | | | | | | | | | | | | | | |
| 32 bit | Bin | 1 to 11 | 1 to 10 | | | | | | | | | | | | | | | | | |
| | BCD | | - | | | | | | | | | | | | | | | | | |
| | Float | 1 to 17 | 1 to 16 | | | | | | | | | | | | | | | | | |
| Display Style | <p>There are three ways of positioning statistical data: [Align Right], [Align Left], and [Align Center].</p> | | | | | | | | | | | | | | | | | | | |
| Zero Suppress | <p>If this option is selected, leading zeros are not displayed.</p> <p>For example: When Total Display Digits = 4</p> <div style="display: flex; justify-content: space-around; align-items: center; margin: 10px 0;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Zero Suppress <div style="border: 1px solid black; padding: 2px 10px;">25</div> <p>Leading zeroes are not displayed</p> </div> <div style="text-align: center;"> <input type="checkbox"/> Zero Suppress <div style="border: 1px solid black; padding: 2px 10px;">0025</div> <p>Zeroes are added to correspond to the length of Display Digits</p> </div> </div> | | | | | | | | | | | | | | | | | | | |

Continued

| Setting | Description |
|-------------------|---|
| 7-segment Display | <p>Select this option to show values as a 7-segment display.</p> <p>NOTE</p> <ul style="list-style-type: none">• This can be set only when [Text Attribute] is selected as [Standard].• This option is not available when a [Fixed Size] is selected in the font [Size] list. |
| Auto-size Font | <p>For use with the Stroke Font, select this option to display the value without the top and bottom margins.</p> <p>NOTE</p> <ul style="list-style-type: none">• This option is unavailable when the [7-segment Display] check box is selected. |
| Preview | Displays the data image according to the settings. |

■ Color

Select colors for the Statistical Data Display.

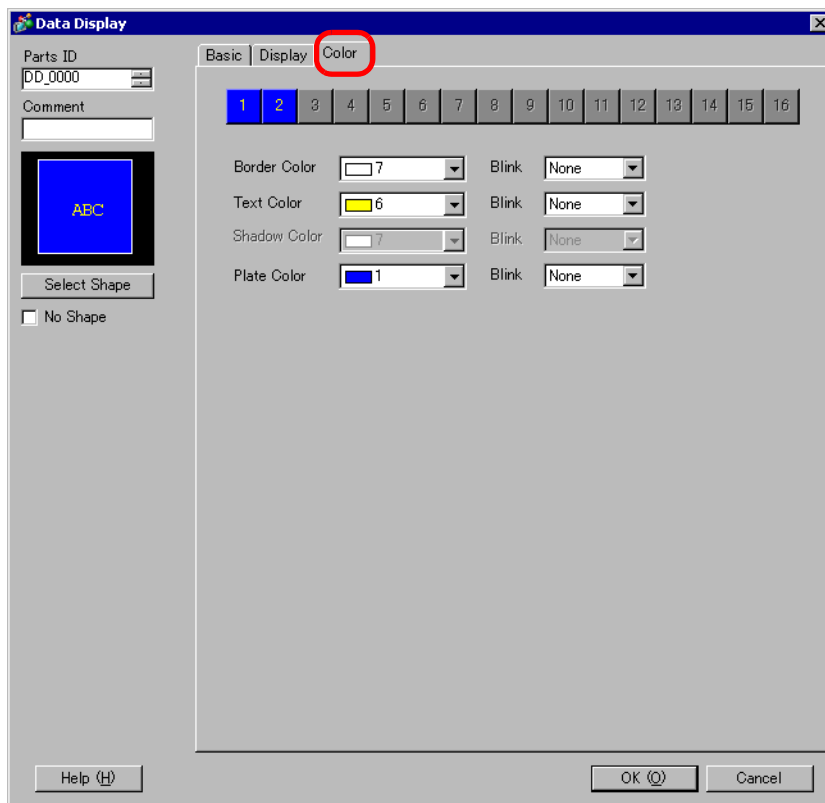


| Setting | Description |
|------------------|---|
| Select State Bar | Displays the division range number selected in [Data Divisions]. |
| Border Color | Set the border color. |
| Text Color | Set the text color. |
| Shadow Color | Set the shadow color. |
| Plate Color | Select the background color. |
| Blink | <p>Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Border Color], [Text Color], [Shadow Color], and [Plate Color].</p> <p>NOTE</p> <ul style="list-style-type: none"> There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p> "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42)</p> |

14.11.5 Show Limit Value


Displays the set Alarm values (the displayed data's upper/lower limit values) on the same screen as a Numeric Display part with alarms set.

■ Basic Settings

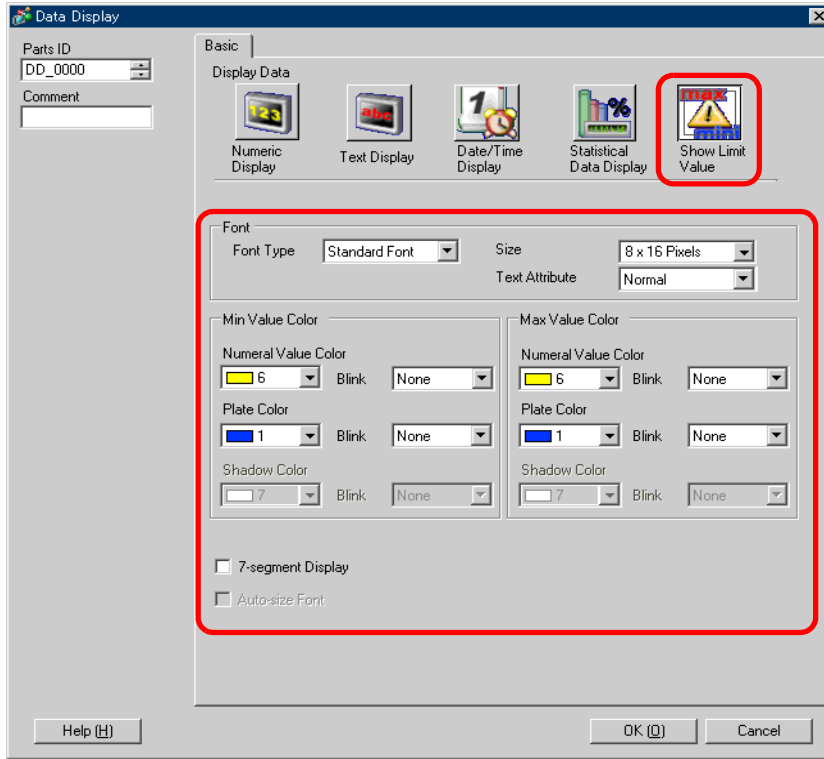

| Setting | Description |
|----------------|--|
| Font | Set the font. |
| Font Type | Choose a font type for the Limit Value from [Standard Font] or [Bitmap Font]. |
| Size | Choose a font size for the Limit Value. Standard Font: (8 to 64) x (8 to 128) Standard Font (Fixed Size): [6x10], [8x13], [13x23] (Displays single-byte characters only) Stroke Font: Select from 6 to 127. |
| Text Attribute | Select the text attributes. Standard Font: Choose from [Standard], [Bold], [Shadow] (When using the [6x10] font size, select either [Standard] or [Shadow].) Stroke Font: Choose from [Standard], [Bold], [Outline] |
| | <div style="border: 1px solid black; padding: 2px; display: inline-block;">NOTE</div> <ul style="list-style-type: none"> When using [Auto-size Font] with either [7-segment Display] or [Stroke Font], the [Text Attribute] cannot be defined. |

Continued

| Setting | | Description |
|-----------------------------------|---------------------|---|
| Maximum Value/Minimum Value Color | Numeral Value Color | Set a color for the min value/max value. |
| | Plate Color | Set the background color for the max/min value. |
| | Shadow Color | Set the shadow color for the Limit Value. |
| 7-segment Display | | <p>Select this option to show values as a 7-segment display.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This can be set only when [Text Attribute] is selected as [Standard]. • This option is not available when a [Fixed Size] is selected in the font [Size] list. |
| Auto-size Font | | <p>For use with the Stroke Font, select this option to display the value without the top and bottom margins.</p> <p>NOTE</p> <ul style="list-style-type: none"> • This option is unavailable when the [7-segment Display] check box is selected. |
| Blink | | <p>Select whether the Part will blink, and the blink speed. You can choose different blink settings for the [Numeral Value Color], [Plate Color], and [Shadow Color].</p> <p>NOTE</p> <ul style="list-style-type: none"> • There are cases where you can and cannot set Blink depending on the Display Unit and System Settings' [Color Settings]. <p> "8.5.1 Setting Colors ■ List of Available Colors" (page 8-42)</p> |

NOTE


- The input range's (Limit Value's) data type depends on the Numeric Display's data type.
- If there are no [Alarm] in a Data Display in the Allow Input state or if there is no Data Display part, the value range will be displayed as a blank.

14.12 Restrictions


14.12.1 Text Display Restrictions

- It may take longer to transfer text strings because text is larger than other data types. You can change the text display faster with one of the following procedures:
 - If the text is short, set [Display Update Condition] to [Data Change] and display without using [Display Update Bit Address].
 - If the text is long, select [Bit ON] or [Bit Change], and [Display Update Bit Address].
- Even if you are using the [Hide Input Value (Show asterisks)] feature, single-byte spaces do not appear as asterisks [*].
- A NULL code or Display characters (no. of bytes) is recognized at the end of a text string. If the actual number of displayed characters is smaller than the number of characters set in [Display characters], please store NULL="00(h)" (In Unicode, Null="0000(h)" in the leftover portion of the device/PLC's address. If there is still room left after the NULL, a SPACE ()="20(h)" character will be stored.

For example, Display characters = 6 Actual Number of Displayed Characters ("ERROR") = 5

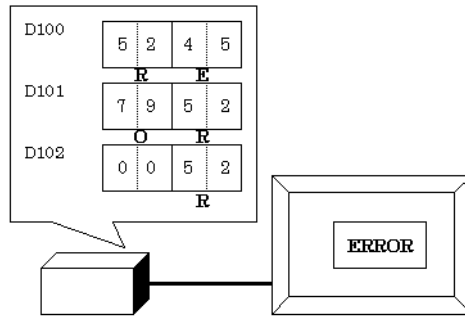


For example, Display characters = 6 Actual Number of Displayed Characters ("STOP") = 4

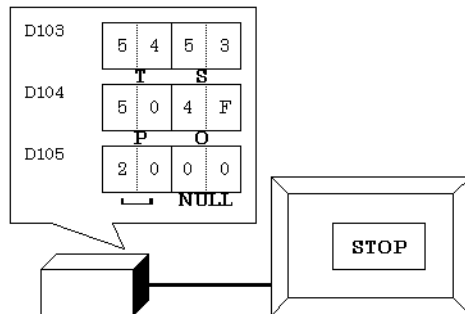

- The relationship of high order and low order Word data will differ according to the device/PLC type.

If the text is not displayed correctly, as in the following example, change the character code's store order in the device/PLC.

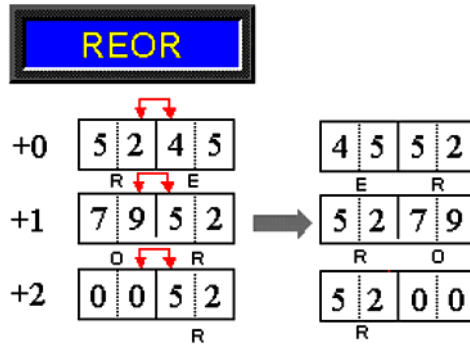

- When you input text to a Data Display set up with integer variables, regardless of how text is set up on the device/PLC, the data displays as follows.


For example, Display Characters: 4, Allow Input is specified, Input Character "ABCD"

| | 31 | 24 | 23 | 16 | 15 | 8 | 7 | 0 |
|-------|----|----|----|----|----|---|---|---|
| HEX | 44 | 43 | 42 | 41 | | | | |
| ASCII | D | C | B | A | | | | |


■ Character Input

- If the number of input characters is less than the [Display characters], a SPACE ()="␣20(h)" character will be stored in the remaining portion.

Display characters= 6 Inputted Characters = 4 (when using a 16-bit device)



Display characters= 5 Inputted Characters = 4 (when using a 16-bit device)



14.12.2 Limitations of Time-Base Function

- If the device specified in the [Basic Settings] workspace's [Monitor Word Address] field is not compatible, the Time-Base function will not work.
- If you select the [Time-Base] check box, you cannot change the following items:

| Category | Function | Fixed Value |
|---------------------------|---------------------------------|----------------------|
| Basic Settings | Address Type | Direct Specification |
| | Input/Display Range Definitions | Disable |
| | Data Type | 16 Bit Dec |
| | Sign +/- | Disable |
| | Round Off | Disable |
| Basic | Total Display Digits | 3 |
| | Decimal Places | 0 |
| | Display Style | Right Align |
| | Zero Suppress | Enable |
| | Zero Display | Enable |
| | Display Format | Disable |
| Alarm/Color* ¹ | Ranges | 1 |
| | Area Specification | Constant |
| | Range Number | Min: 0 Max: 999 |
| | Alarm Action | Constant |
| Processing | Processing | Disable |
| Allow Input | Input Barcode | Disable |


*1 If the [Allow Input] check box is selected in the [Basic] tab and the [Fixed Input] check box is cleared in the [Time-Base] group, you cannot change the [Alarm] in the [Alarm/Color] tab. You can set the [Alarm Range] with a value from 0 to 999.

- In the middle of a data input from the GP, even if you change how the defined address stores its data, the input will continue to use the previous input setting. This is not updated in real time.

14.13 How Data Input Order Works

14.13.1 Set Input Order

After confirming the input in a given Data Display (and pressing the [ENT] key), the Data Display part registered with the next [Input Order] number enters the Allow Input state.

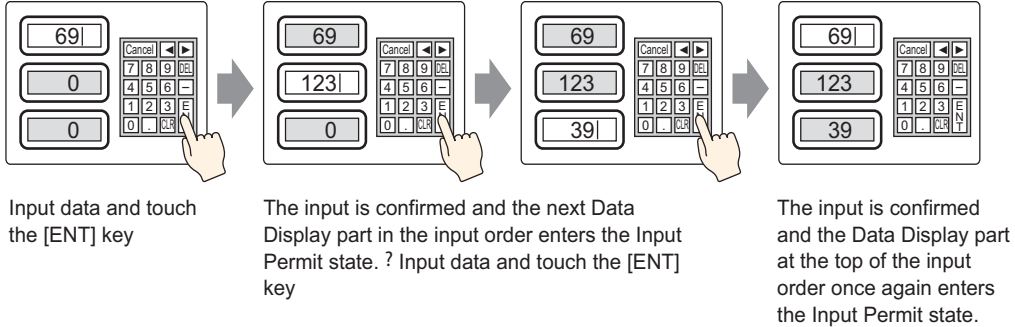


Ending sequential input


For [Touch], when inputting is complete, you can touch the keypad's [CANCEL] key, or touch the currently selected Data Display part again. For [Bit], the input is complete when you turn OFF the [Allow Input Bit Address].

Sequential input targets

For [Touch], the Data Displays that have a [Designated Input Order] set become targets for sequential inputting.

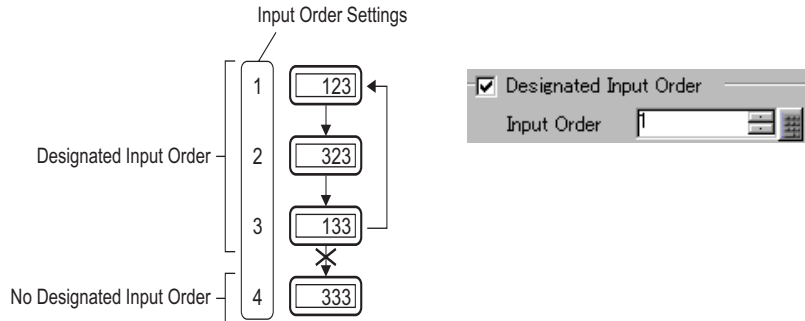


For [Bit], although there is a setting to control the input order of all Data Display parts, in practice, the only target of sequential input is having [Allow Input Bit Address] ON.




14.13.2 Set Input Order by Group

For [Touch], sequential input Data Displays can be divided up into groups on the Detail screen. Sequential input then takes place inside each group.

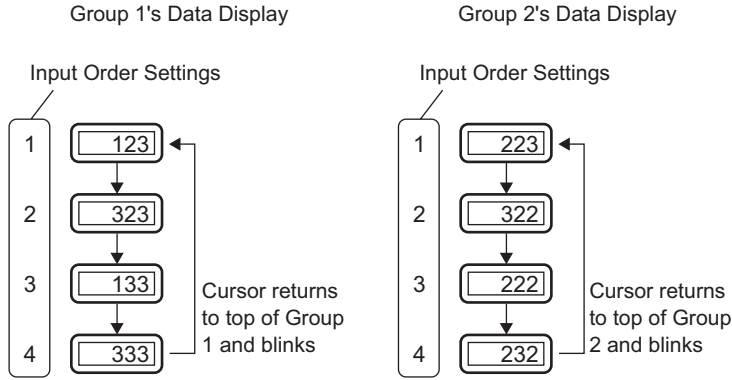

NOTE

- If there is an interlocked data display part in the [Input Order], skip the interlocked part and proceed to the next Data Display part that is ready for inputs. In the following figure, the order is 1→3→4→1.



- If you press the [↑][↓] arrow keys while inputting, the current input will be canceled, the previous data will appear, and the next Data Display in the input order will enter the Allow Input state and display the cursor.
- In the figure below, when the second Data Display Part of the [Input Order] becomes available for input, you can input data in the following order: 2→3→4→1→2.

