



Mitsubishi <3> Mitsubishi Electric Corporation

A Series (AnA/AnU/AnUS/AnUSH) CPU Direct Connection

System Structure



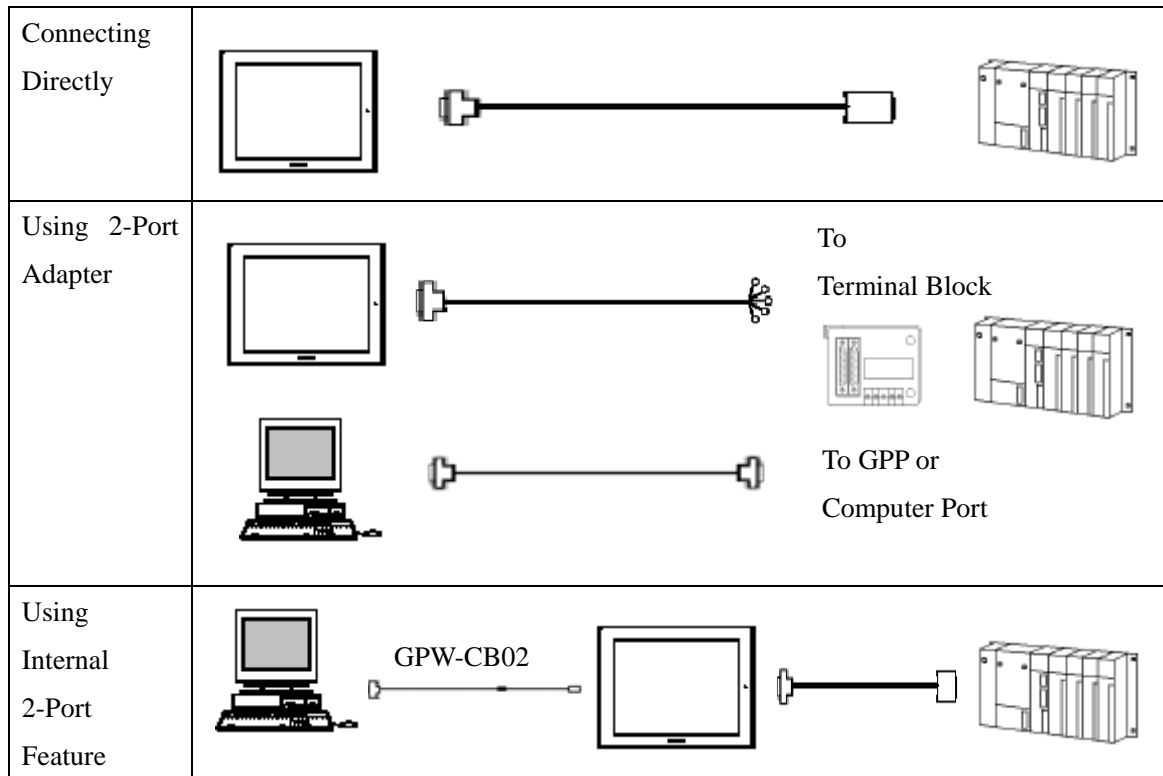


GP





| Machine  | Model | Remark |
|--|---|---|
| GP | GP70 Series GP77/77R Series GP2000 Series | Excepting for handy types. The internal 2-Port feature is supported by only GP77/77R Series and GP2000 Series. |
| GLC | GLC2000 Series | 2-Port Adapter and the internal 2-Port feature are not supported. |

PLC




[Connecting Directly]

| CPU  | Communication Method | Connection Cable  | GP  |
|--|----------------------|--|---|
| A2A, A3A, A3U, A4U, A2U-S1, A2US, A2US-S1, A2USH-S1 | RS-422 | Connection Method [1] | |
| | RS-232C | | |

[Using 2-Port Adapter]

| CPU  | Adapter  | Communication Method | Connection Cable  | GP  |
|--|--|----------------------|---|--|
| A2A, A3A, A4U, A2U-S1, A2US, A2USH-S1 | GP070-MD11 | RS-422 | Connection Method [2] | |

[Using Internal 2-Port Feature]

| CPU  | Communication Method | Connection Cable  | GP  |
|--|----------------------|---|---|
| A2A, A3A, A2U-S1, A2US, A2USH-S1 | RS-232C | Connection Method [1] | GP77/77R Series GP2000 Series |
| | RS-422 | | |